
First beat: instrument identity and complete sequencer

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE

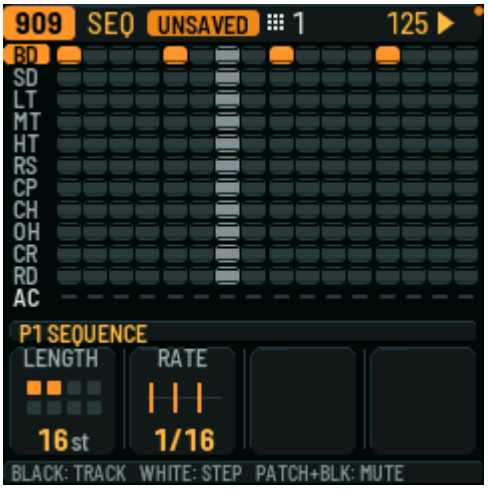

Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep 11tracks plus accent,16columns, LENGTH/RATE, black-track selection, white/pad writing, PATCH+black mute and all useful lower controls.

Change / reconsider Recognizable instrument pictures plus common compact status; all useful lower controls stay.

Practical purpose Recognize the chosen sound without a selection detour; physical recognition remains unqualified.


Control sequence Known fresh empty909 SEQ: pads0/4/8/12, then SEQ PLAY. The delivered running comparison has the same four-kick pattern.

Action cost 4 step taps +1 PLAY from initialized selected909; +1 track selection if unknown. Proposed navigation delta0.


Tradeoff / unknown Running phase and unspecified project cells are not synchronized. Picture recognition and audible outcome are not qualified; this is a visual/model proposal.

Juno: preserve large values and fast parameter editing

ACTUAL3c41 ELITE EMULATOR

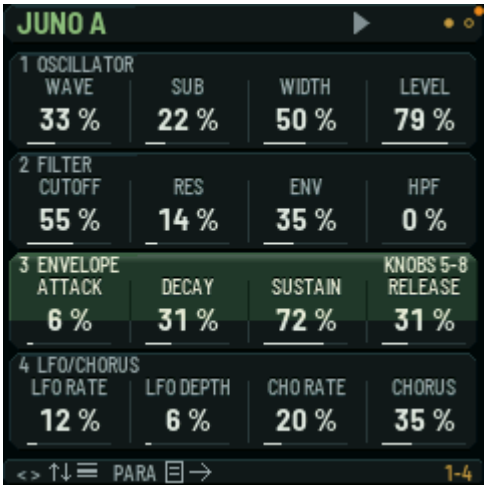

R6 PROPOSAL / NOT FIRMWARE

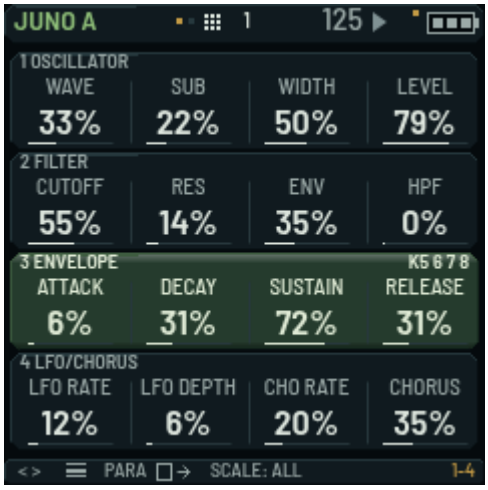

Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Existing large numeric readouts, labels, neutral bars, four columns, four neighboring groups plus SOUND,16 controls and remembered navigation.

Change / reconsider R5 contrast loss is corrected; unproven heading thumbnails are withdrawn. Native large bright values/neutral bars stay. Contextual held/motion scope uses only the selected-row gutter.

Practical purpose Restore the current neighboring-value legibility. This repair/retention is not a new firmware benefit.

Control sequence PARA enters remembered PART; K2 or PARA changes rows; K5-K8 edit fixed columns; fifth SOUND page remains.

Action cost All parameter access routes retained. Delta0; no timed/recognition benefit claimed.

Tradeoff / unknown Actual complete3c41 ENVELOPE is paired with the same proposed selected row and same values. The selected-row lock/motion gutter cue is an extension whose usefulness/recognition still requires assessment. The earlier oscillator capture has an incomplete lower band and is excluded from equivalent-state presentation. No AudioKitJ6, audio or live-cursor fidelity claim.

Miami: keep its actual native vocabulary

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Every actual native body/lower pixel, all sparse columns, source oscillator/level/filter/wobble glyphs, readouts and existing footer. DynamicMIAMI A already exists.

Change / reconsider Only the common top status/power composition changes. No replacement Juno/ADSR-style language is introduced into Miami.

Practical purpose Keep the source family that already conveys the sound; do not disguise a different q fixture as this untouched factory.


Control sequence Fresh actual3c41: initialK3raw5cycles selectsA;PARA;settle. Existing K2/PARA/K5-8 routes are source baseline.

Action cost No extra firmware gesture. Actual raw cycles are not calibrated detents.

Tradeoff / unknown After is explicitly a static native-body composition. Interactive authored known-q fixture uses source edited text/wave lookup and is separate: untouched nativeTUNE+0.91 is not reachable at editedq75(+0.87) or76(+0.95). Hidden native/factory fields are not exported. No audio/backend/other-factory parity claimed.

Correct64steps while a pattern is pending

ACTUAL3c41 ELITE EMULATOR

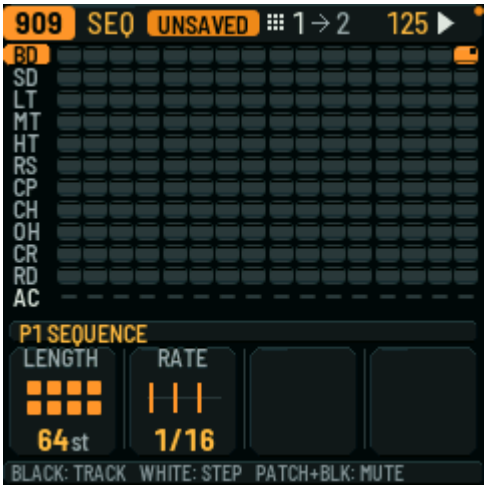

R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Native16columns,11tracks+accent, length/rate, manual windows, hidden stored cells, chance/locks and unchanged physical routes.

Change / reconsider Absolute49-64/64 stays in the otherwise unmapped lower half when the native pending badge replaces the header range. A held nondefault chance uses that same area.

Practical purpose Know which absolute step the pad edits even while P2 is queued. Source action outcomes are unchanged.


Control sequence Known64step P1: OCTAVE+ x 3; holdpad15, K2negative, release; PLAY; K4 cuesP2.

Action cost 3 page presses;1hold+1turn; PLAY+K4. Added firmware actions0.

Tradeoff / unknown Actualv3 verifies STEP64:95% andP1 to P2. Running phase is unsynchronized; no exact probability/audio timing result. Selected instrument illustration uses only formerly unmapped K7/K8 space.

Know when motion will retake the control

ACTUAL3c41 ELITE EMULATOR

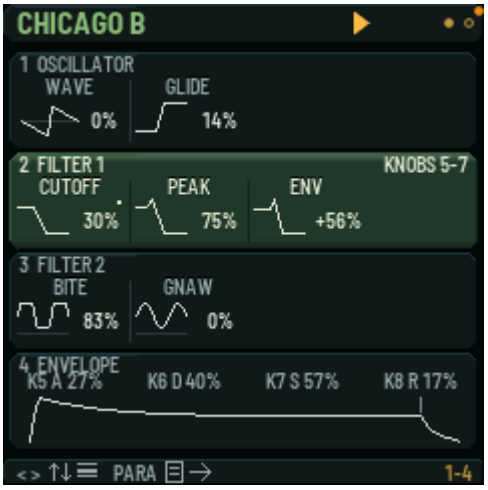

R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Existing control positions, source glyphs/ADSR, large values, saved-lane dots, broadREC and original target ownership.

Change / reconsider A small loop/count cue in the selected-row gutter shows the modeled one-pass override; recording request/capture uses outlined/filled marks.

Practical purpose Keep the hand-played override distinct from a deleted lane and from the base that remains after the pass.

Control sequence REC+turn to matching step; RECoff+turn to one pass; BT+assignedturn clears. Heldstep+BTturn clears only that position.

Action cost Ready override1turn; wholeclear1BTpress+1turn, same current route. Model step events are not new controls.

Tradeoff / unknown Native visible Cutoff30% is matched. Proposed15 remaining steps is an explicit controlled model fixture, not measured native phase or raw-cell parity. Native ramps/actual listening remain unqualified; base edit persists.

See all five sources before overwriting

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Occupied-note warning, destructive confirmation, full-size SCALE YES/PATCH NO cues, normal cancel/PLAY consequence and existing copy gesture.

Change / reconsider Existing modal adds five current source to destination IDs, old/new content rows and owned-lane counts; current IDs freeze at destination press.

Practical purpose Confirm the actual multi-part consequence rather than guessing that all five sources are one selected slot.

Control sequence BT down+destination; inspect existing question; SCALE confirms orPATCH cancels. Copy does not cue destination.

Action cost Empty2presses; occupied3including confirm/cancel. Added actions0.

Tradeoff / unknown Actual pair is simpleP1 to P2 with only909 content known. Separate mixed-source guided fixture is authored, not captured music. Per-part capacity can partially succeed; motion-only destination still does not trigger source question. Global sounds/FX are not copied.

See each part’s next pattern

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Current content-derived thumbnails, independent assignments/playheads, used pads, original current ticks, chain and all four performance controls.

Change / reconsider Steady right-edge pending arrows identify each target part. Queued-mute settingON adds a dashed mark; current mute keeps source dimming.

Practical purpose Separate909’sP2 request from808’sP3 and from a mute that has or has not applied.

Control sequence K4 on909; K3select808; K4 toP3; PATCH toHOME; black2mutes808.

Action cost Same part/cue/mute gestures; no added page, confirmation or physical LED colour.

Tradeoff / unknown Actual fresh queued-mute setting isOFF and808 is already muted; this pair preserves that. ON-policy dashed marks are a separate source-derived model fixture. Low playhead positions are pixel-matched;909 base32 is an inferred fixture, not an exported engine index. No exact native internal-state parity claimed.

Phrase to correction to replay to another take

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Current stopped NOTE/TIE/REST entry, V100, cursor reset, direct held pitch/gate/accent/slide and original release ownership.

Change / reconsider Rearm explicitly says REWRITE1-LEN; one canonical cell drives the piano roll and readouts across the connected model.

Practical purpose Make replacement of visited cells visible without inventing a separate take or extra confirmation.

Control sequence REC; F4,TIE,G4,REST,A4; disarm; replay; holdstep3+OCTAVE+; release/replay; rearm withG#4 and replay.

Action cost Current controls/counts retained. Browser produces data only; actual3c41 replay WAV/LCD receipts are separate.

Tradeoff / unknown Observed actual upperG4/lowerG3 discrepancy is preserved; proposedG4both follows source intent, not identical observed pixels or a diagnosed device fix. Three distinct nonzero native PCM replays exist; listening/pitch/durability acceptance remains open. Current REC uses central27; CP2/3 not selected.

Write a bar, select it, change one part

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Native BAR/pattern identity glyphs, repeats, neighboring bars, dim used pads and current manual authoring gesture.

Change / reconsider R5 model defect is corrected: pad writes all fiveP1 assignments and selects BAR2/END; K5 and both BAR pages now edit real data.

Practical purpose The promised current authoring route actually executes in the walkthrough. This repairs the prototype; it is not new firmware behavior.

Control sequence From emptySong pad0; K5- selectsBAR1; K6 changes909; K2page1 exposesBASS B/A/repeat.

Action cost Pad write1press; BAR selection1turn; part edit1turn. Added actions0.


Tradeoff / unknown Manual bar authoring is separate from future capture strategy. Arrangement audio/recording/durable reload are not accepted by this model. Song at192bars has no extra END row.

Retire notes, keep transport, play again

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE

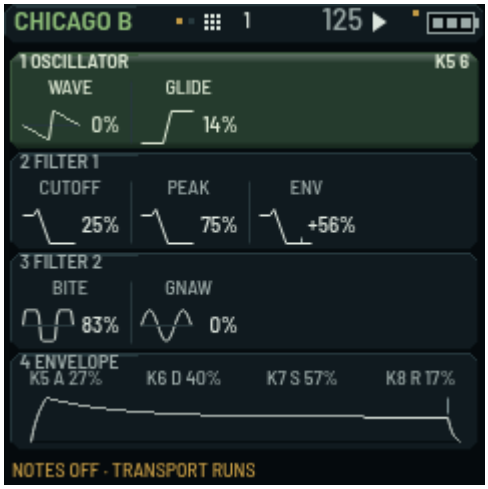

Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Native current PART page, all parameter access, source FX+SEQ chord/release consumption and preserved pattern/transport.

Change / reconsider A brief footer acknowledgement says NOTES OFF / TRANSPORT RUNS, then restores the useful footer.

Practical purpose Distinguish note retirement from stopping a running performance and know a fresh note is the next recovery action.

Control sequence Hold live key; FX down+SEQ down; release both and old key; play/release a fresh key.

Action cost 2chordpresses+2releases+freshnote, same source route. No navigation added.

Tradeoff / unknown Current source has no dedicated keyboard toast. Actual capture/replay observations are bounded; RMS falls to0 after release and rises for a fresh note. This is not unconditional silence, tail kill, host reset or physical proof. SMC/clip panic scopes remain separate.

Connected use starts with truthful no-host state

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Actual LP/INT/tempo context, WAITING FOR LOOPY PRO body and every original lower Clip Keys pixel/control cue.

Change / reconsider Power uses the same compact top position. Body/lower native pixels are reused unchanged; no host grid or acknowledgement is fabricated.

Practical purpose Keep useful power visible during connected use while retaining the established host-wait and key context.

Control sequence Fresh ready controller: KNOB BANK37 press/release; settle past entrytoast. SCALE opens the existingOFF page; KNOB BANK returns.

Action cost Entry1press; page1press; exit1press. Added actions0.

Tradeoff / unknown Actual3c41 no-host capture only. Generic LCD clock/transport and physical host-feedback LEDs have different owners. Menu scalar edits/host grid/SMC operation remain unmodeled; this static composition is not completed connected design.

BREAK: retain slice, step and live-context surfaces

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep Eight visible slice slots, real waveform region,16step strip, A/B identity, count/page controls and every lower LOOP control/help.

Change / reconsider Common top status; current empty/unavailable fixture is truthful and contains no invented waveform.

Practical purpose A useful waveform and release context must remain when valid loop data exists; absence must not masquerade as a playable loop.

Control sequence C/D adjust count; C#/D# page; hold step plus1-8 pins a slice;9REV/10JUNGLE/11STUT stay available.

Action cost No added page or confirmation. Source route counts depend on the exact phrase.

Tradeoff / unknown Captured BUILD_ONLY fixture has no available loop waveform: A NONE, B INVALID in controls. No audible BREAK success, valid-loop playback or release continuity is claimed. A populated equivalent fixture remains required.

Mixing: the visible kit owns controls and pad release

ACTUAL3c41 ELITE EMULATOR



R6 PROPOSAL / NOT FIRMWARE



Original240 x240 pixels embedded without resampling. Before inputs executed3c41; accepted d158 has identical relevant UI sources, not an executed d158 package. Proposal bars are a controlled power fixture.

Keep 11track strips, pan thumbs, four lower LEVEL/PAN/REV/DLY controls, native dB/pan units, kit hue and step layer.

Change / reconsider Instrument pictures and top status unify the display. Typed values share their source parameter owner; existing-hit deletion resolves on short release.

Practical purpose The visible destination and physical controls agree. R4 model repairs are not advertised as firmware feature additions.

Control sequence From initial SEQ: NOTE REPEAT twice to909 MIX; black selects track; K5-K8 edit; existing step held800ms then released remains.

Action cost Same source gestures; delta0. MIX holds do not acquire p-lock scope.

Tradeoff / unknown Static source levels only; live meters/audio and physical LED brightness are not fabricated. Current capture only verifies the selected kick level and visible layout, not every stored raw cell.

The whole instrument: concrete work and remaining gaps

R5 was a useful conservation study, not a completed overhaul. R6 now has six connected model walkthroughs and truthful ordinary Song authoring. Existing good native behavior is retained; prototype repairs are not advertised as firmware features.

Playing and all engines 909/808 typed controls and direct lower functions remain. Chicago native wave/ADSR vocabulary, bright large Juno values and Miami native family are retained. Active Drone is deferred; saved identities are not converted.

Sequencing and performance Absolute64-step range, scoped locks/chance, independent current/queued patterns, cue/mute masks, one-pass override and occupied five-part copy now have concrete states and control traces. RGB pads retain source priorities; keybed lights are not invented.

Recording and recovery Current stopped phrase/correction/repeated-entry data is modeled; actual3c41 has separate stored-step and three distinct nonzero PCM receipts. REWRITE is current replacement behavior, not a new take object. Running/poly/full37 recording and durable recovery remain open.

Generator and valid BREAK Source NEW/MUTATE destroys more than visible cells; no preview buffer exists. Their concrete model/history remains unfinished. Actual BREAK fixture is unavailable/empty; a valid loop fixture is needed for musical override/release proof.

Connected control Actual no-host Loopy and its unchanged lower pixels are compared here. Host grid/scalar/viewport operations and a legitimate SMC peer fixture are not completed. SMC normal/peek/held-FX headers require explicit power-space preservation.

Settings Exact R2 component and six paired workflows are composed unchanged in HTML. Its before evidence is historical25.x; not current3c41. Common-header adoption and held-note continuity remain with its component owner.

Presets and lifecycle The seven CP1 cases stay with their incumbent. Selected CP2 capture strategy follows that decision, then CP3 lifecycle. Current broadREC/ordinarySong model work does not silently freeze those future choices.

What the inventory means All39 journeys and261 exact requirement rows are retained with specific remaining obligations;22 status-only R22 extraction defects are flagged. Counts, safe refusals, native pictures and model checks are not audible whole-design acceptance.

Evidence boundaries and the next consumer

Actual inputs New isolated current3c41 Elite producer captures cover recording,64-step cue-hidden range, occupied copy, motion, panic/fresh-note, no-hostLoopy and Miami. Exact package/runtime/harness/plan/LCD hashes remain separate from proposal renderer hashes. Unchanged Pro proof is reused; no Pro/device run is invented.

Failed attempts retained First recording setup reachedBREAK and was silent. Negative raw encoder counts produced no turns; an earlier clear attempt leftBT unused. Corrected named attempts are visually qualified. These are producer input issues, not firmware defect findings.

Native/model distinction Miami factory comparison retains actual body/lower pixels; its authored-q interactive editor is separate. Chicago WAVE has a bounded source-projector recipe. Source initial/native floats, live cursors, audio backends and all-factory equivalence are not inferred from rounded UI values.

One independent reviewer Existing /root/pr921_latest/r3_fresh_review is the route through parent01a1af1b. R5 review does not accept R6. No new reviewer, designer or runtime writer is created. The reviewer must exercise this exact proposal and legitimate current package within the affected scope.

Next implementation consumer The existing firmware program owner6af85eee remains the downstream consumer within its gate. This packet is design only; no firmware edits/builds, device operation, release or merge is approved.

Power and delivery Top power is honest0-3bars/USB/unknown. No percentage or charging signal is fabricated. PDF is a standard parsed/rendered document; actual iOS-device opening remains NOT_RUN. Native PNGs are separately directly viewable. Library prepared-uploadHTTP401 was not retried; Git has separate owner authorization.

Still needed Same-hardware comparator producer output/adoption, valid BREAK fixture, SMC/clock input qualification, complete remaining unreserved journeys, protected preset interfaces, audible/durable recovery, physical recognition/readability/resources and DF1. These remain specific work; future gates do not excuse defects in this proposal.