
First beat: instrument identity and complete sequencer

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE

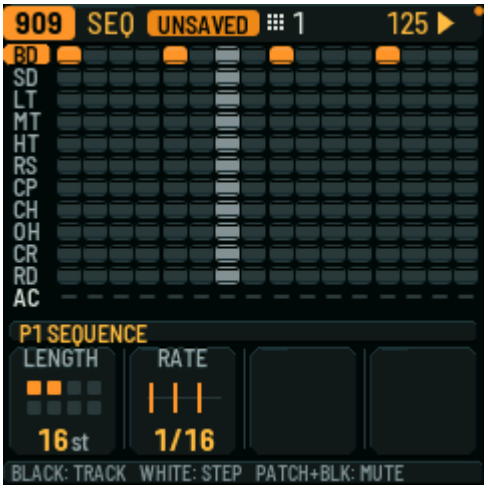

Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep 11tracks plus accent,16columns, LENGTH/RATE, black-track selection, white/pad writing, PATCH+black mute and all useful lower controls.

Change / reconsider Recognizable instrument pictures plus common compact status; all useful lower controls stay.

Purpose Recognize the chosen sound without a selection detour; physical recognition remains unqualified.


Controls Known fresh empty909 SEQ: pads0/4/8/12, then SEQ PLAY. The delivered running comparison has the same four-kick pattern.

Action cost 4 step taps +1 PLAY from initialized selected909; +1 track selection if unknown. Proposed navigation delta0.


Limits / tradeoff Running phase and unspecified project cells are not synchronized. Picture recognition and audible outcome are not qualified; this is a visual/model proposal.

Juno: preserve large values and fast parameter editing

ACTUAL FIRMWARE / 0.0.26 / 3c41

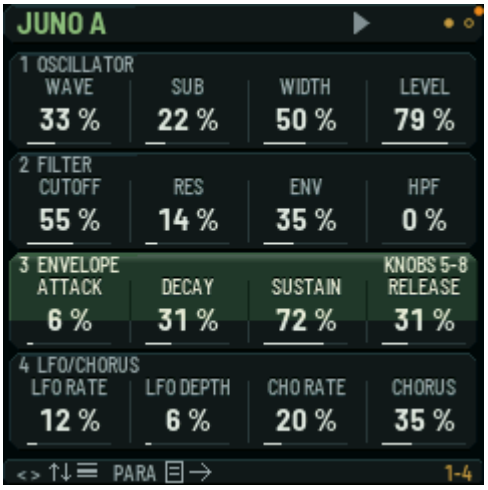

PROPOSED UI / NOT FIRMWARE

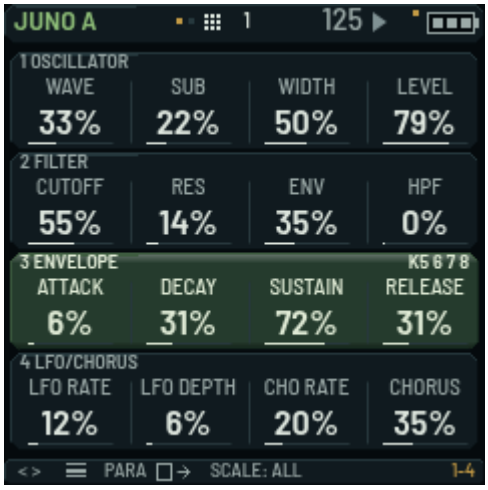

Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Existing large numeric readouts, labels, neutral bars, four columns, four neighboring groups plus SOUND,16 controls and remembered navigation.

Change / reconsider R5 contrast loss is corrected; unproven heading thumbnails are withdrawn. Native large bright values/neutral bars stay. Contextual held/motion scope uses only the selected-row gutter.

Purpose Restore the current neighboring-value legibility. This repair/retention is not a new firmware benefit.

Controls PARA enters remembered PART; K2 or PARA changes rows; K5-K8 edit fixed columns; fifth SOUND page remains.

Action cost All parameter access routes retained. Delta0; no timed/recognition benefit claimed.

Limits / tradeoff Actual complete3c41 ENVELOPE is paired with the same proposed selected row and same values. The selected-row lock/motion gutter cue is an extension whose usefulness/recognition still requires assessment. The earlier oscillator capture has an incomplete lower band and is excluded from equivalent-state presentation. No AudioKitJ6, audio or live-cursor fidelity claim.

Miami: keep its actual native vocabulary

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED HEADER · NATIVE BODY



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Every actual native body/lower pixel, all sparse columns, source oscillator/level/filter/wobble glyphs, readouts and existing footer. DynamicMIAMI A already exists.

Change / reconsider Only the common top status/power composition changes. No replacement Juno/ADSR-style language is introduced into Miami.

Purpose Keep the source family that already conveys the sound; do not disguise a different q fixture as this untouched factory.


Controls Fresh actual3c41: initialK3raw5cycles selectsA;PARA;settle. Existing K2/PARA/K5-8 routes are source baseline.

Action cost No extra firmware gesture. Actual raw cycles are not calibrated detents.

Limits / tradeoff After is explicitly a static native-body composition. Interactive authored known-q fixture uses source edited text/wave lookup and is separate: untouched nativeTUNE+0.91 is not reachable at editedq75(+0.87) or76(+0.95). Hidden native/factory fields are not exported. No audio/backend/other-factory parity claimed.

Correct 64 steps while a pattern is pending

ACTUAL FIRMWARE / 0.0.26 / 3c41

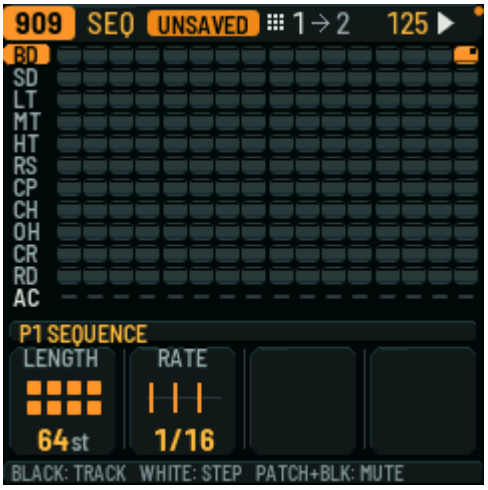

PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Native16columns,11tracks+accent, length/rate, manual windows, hidden stored cells, chance/locks and unchanged physical routes.

Change / reconsider Absolute49-64/64 stays in the otherwise unmapped lower half when the native pending badge replaces the header range. A held nondefault chance uses that same area.

Purpose Know which absolute step the pad edits even while P2 is queued. Source action outcomes are unchanged.


Controls Known64step P1: OCTAVE+ x 3; holdpad15, K2negative, release; PLAY; K4 cuesP2.

Action cost 3 page presses;1hold+1turn; PLAY+K4. Added firmware actions0.

Limits / tradeoff Actualv3 verifies STEP64:95% andP1 to P2. Running phase is unsynchronized; no exact probability/audio timing result. Selected instrument illustration uses only formerly unmapped K7/K8 space.

Know when motion will retake the control

ACTUAL FIRMWARE / 0.0.26 / 3c41

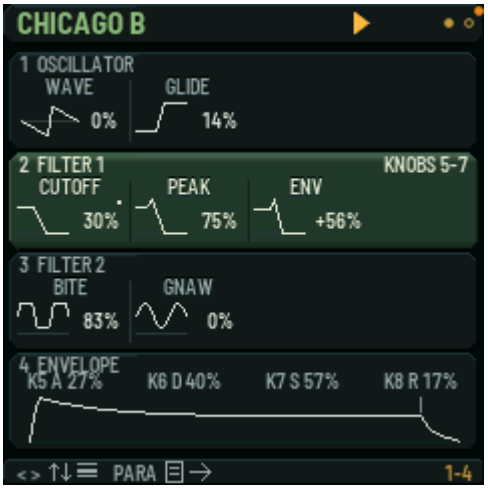

PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Existing control positions, source glyphs/ADSR, large values, saved-lane dots, broadREC and original target ownership.

Change / reconsider A small loop/count cue in the selected-row gutter shows the modeled one-pass override; recording request/capture uses outlined/filled marks.

Purpose Keep the hand-played override distinct from a deleted lane and from the base that remains after the pass.

Controls REC+turn to matching step; RECoff+turn to one pass; BT+assignedturn clears. Heldstep+BTturn clears only that position.

Action cost Ready override1turn; wholeclear1BTpress+1turn, same current route. Model step events are not new controls.

Limits / tradeoff Native visible Cutoff30% is matched. Proposed15 remaining steps is an explicit controlled model fixture, not measured native phase or raw-cell parity. Native ramps/actual listening remain unqualified; base edit persists.

See all five sources before overwriting

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Occupied-note warning, destructive confirmation, full-size SCALE YES/PATCH NO cues, normal cancel/PLAY consequence and existing copy gesture.

Change / reconsider Existing modal adds five current source to destination IDs, old/new content rows and owned-lane counts; current IDs freeze at destination press.

Purpose Confirm the actual multi-part consequence rather than guessing that all five sources are one selected slot.

Controls BT down+destination; inspect existing question; SCALE confirms orPATCH cancels. Copy does not cue destination.

Action cost Empty2presses; occupied3including confirm/cancel. Added actions0.

Limits / tradeoff Actual pair is simpleP1 to P2 with only909 content known. Separate mixed-source guided fixture is authored, not captured music. Per-part capacity can partially succeed; motion-only destination still does not trigger source question. Global sounds/FX are not copied.

See each part’s next pattern

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Current content-derived thumbnails, independent assignments/playheads, used pads, original current ticks, chain and all four performance controls.

Change / reconsider Steady right-edge pending arrows identify each target part. Queued-mute settingON adds a dashed mark; current mute keeps source dimming.

Purpose Separate909’sP2 request from808’sP3 and from a mute that has or has not applied.

Controls K4 on909; K3select808; K4 toP3; PATCH toHOME; black2mutes808.

Action cost Same part/cue/mute gestures; no added page, confirmation or physical LED colour.

Limits / tradeoff Actual fresh queued-mute setting isOFF and808 is already muted; this pair preserves that. ON-policy dashed marks are a separate source-derived model fixture. Low playhead positions are pixel-matched;909 base32 is an inferred fixture, not an exported engine index. No exact native internal-state parity claimed.

Recording: keep modifiers and immediate held-step readouts

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Current stopped NOTE recording keeps CHORD accent and NOTE REPEAT slide, consumes their releases, and uses the dedicated large white held-step editor.

Change / reconsider R6 model losses are corrected. The MIDI note, gate, accent and slide use the current23px face within their native34px value region; generic slider substitutes are removed.

Purpose The note and gate stay immediate during correction. Releasing a used slide modifier does not unexpectedly enter MIX. These are prototype repairs, not new firmware features.

Controls REC; hold NOTE REPEAT; physical17 down/up; release modifier; REC off; hold physical5 to inspect stored step1. CHORD follows the same source accent route.

Action cost Existing controls and gesture count retained. Physical37 keys now use their actual contextual GRID/track/live roles.

Limits / tradeoff Matched stored F3/NOTE/OFF/ON state; actual source may retain its recent RECORD OFF header toast. Source screenshot is current3c41, proposal is a separate model. Full poly/running capture, native history capacity, durability and listening acceptance remain open.

Write a bar, select it, change one part

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Native BAR/pattern identity glyphs, repeats, neighboring bars, dim used pads and current manual authoring gesture.

Change / reconsider R5 model defect is corrected: pad writes all fiveP1 assignments and selects BAR2/END; K5 and both BAR pages now edit real data.

Purpose The promised current authoring route actually executes in the walkthrough. This repairs the prototype; it is not new firmware behavior.

Controls From emptySong pad0; K5- selectsBAR1; K6 changes909; K2page1 exposesBASS B/A/repeat.

Action cost Pad write1press; BAR selection1turn; part edit1turn. Added actions0.

Limits / tradeoff Manual bar authoring is separate from future capture strategy. Arrangement audio/recording/durable reload are not accepted by this model. Song at192bars has no extra END row.

Retire notes, keep transport, play again

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Native current PART page, all parameter access, source FX+SEQ chord/release consumption and preserved pattern/transport.

Change / reconsider A brief footer acknowledgement says NOTES OFF / TRANSPORT RUNS, then restores the useful footer.

Purpose Distinguish note retirement from stopping a running performance and know a fresh note is the next recovery action.

Controls Hold live key; FX down+SEQ down; release both and old key; play/release a fresh key.

Action cost 2chordpresses+2releases+freshnote, same source route. No navigation added.

Limits / tradeoff Current source has no dedicated keyboard toast. Actual capture/replay observations are bounded; RMS falls to0 after release and rises for a fresh note. This is not unconditional silence, tail kill, host reset or physical proof. SMC/clip panic scopes remain separate.

Connected use starts with truthful no-host state

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED HEADER · NATIVE BODY



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Actual LP/INT/tempo context, WAITING FOR LOOPY PRO body and every original lower Clip Keys pixel/control cue.

Change / reconsider Power uses the same compact top position. Body/lower native pixels are reused unchanged; no host grid or acknowledgement is fabricated.

Purpose Keep useful power visible during connected use while retaining the established host-wait and key context.

Controls Fresh ready controller: KNOB BANK37 press/release; settle past entrytoast. SCALE opens the existingOFF page; KNOB BANK returns.

Action cost Entry1press; page1press; exit1press. Added actions0.

Limits / tradeoff Actual3c41 no-host capture only. Generic LCD clock/transport and physical host-feedback LEDs have different owners. Menu scalar edits/host grid/SMC operation remain unmodeled; this static composition is not completed connected design.

BREAK: retain slice, step and live-context surfaces

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Eight visible slice slots, real waveform region,16step strip, A/B identity, count/page controls and every lower LOOP control/help.

Change / reconsider Common top status; current empty/unavailable fixture is truthful and contains no invented waveform.

Purpose A useful waveform and release context must remain when valid loop data exists; absence must not masquerade as a playable loop.

Controls C/D adjust count; C#/D# page; hold step plus1-8 pins a slice;9REV/10JUNGLE/11STUT stay available.

Action cost No added page or confirmation. Source route counts depend on the exact phrase.

Limits / tradeoff Captured BUILD_ONLY fixture has no available loop waveform: A NONE, B INVALID in controls. No audible BREAK success, valid-loop playback or release continuity is claimed. A populated equivalent fixture remains required.

Mixing: the visible kit owns controls and pad release

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep 11track strips, pan thumbs, four lower LEVEL/PAN/REV/DLY controls, native dB/pan units, kit hue and step layer.

Change / reconsider Instrument pictures and top status unify the display. Typed values share their source parameter owner; existing-hit deletion resolves on short release.

Purpose The visible destination and physical controls agree. R4 model repairs are not advertised as firmware feature additions.

Controls From initial SEQ: NOTE REPEAT twice to909 MIX; black selects track; K5-K8 edit; existing step held800ms then released remains.

Action cost Same source gestures; delta0. MIX holds do not acquire p-lock scope.


Limits / tradeoff Static source levels only; live meters/audio and physical LED brightness are not fabricated. Current capture only verifies the selected kick level and visible layout, not every stored raw cell.

GEN: retain the line and every generator control

ACTUAL FIRMWARE / 0.0.26 / 3c41



PROPOSED UI / NOT FIRMWARE

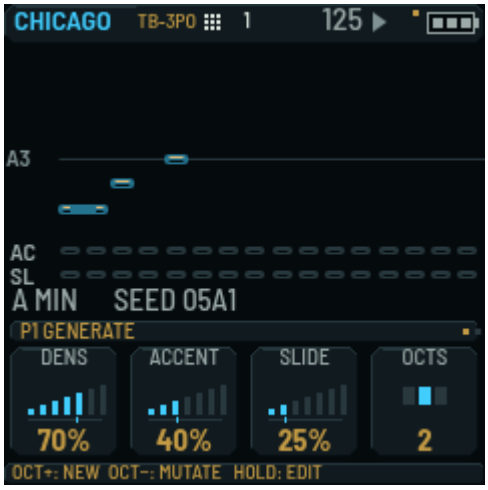

Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Existing root-relative roll, scale/seed, GENERATE controls, native neutral scale/pip vocabulary, NEW/MUTATE and physical ARP state.

Change / reconsider The proposed default GEN white/pad route selects a cell without writing or deleting it. Normal lower controls return on release.

Purpose Correct the line without leaving GEN and finding it again. The proposed route saves the SEQ and return-to-ARP presses.

Controls Actual: SEQ, hold W3, OCT+, release, ARP. Proposed: hold W3, OCT+, release.

Action cost Correction gesture unchanged; two page presses removed. Native NEW/MUTATE captures are separate from the bounded model.

Limits / tradeoff New GEN select-only route needs independent recognizability/collision assessment. Generator controls are temporarily replaced by the explicit note editor while held; compact root/scale/seed remain in its heading and release restores all GEN controls. Footer abbreviates OCTAVE/NEW LINE to OCT/NEW to include HOLD:EDIT; that recognition tradeoff remains unqualified. Public RNG/pattern math is modeled with simulated entropy/time; no audio, native history pool or storage is simulated.

Use the native large held-note editor in GEN

CURRENT SEQ · HELD STEP3



PROPOSED GEN · HELD STEP3



Original 240 x 240 pixels embedded without resampling. Actual-before runs the pinned Elite emulator package. Accepted d158 has matching relevant UI source and was not executed here. Power bars in proposals are an inspection fixture.

Keep Current large white NOTE/GATE/ACCENT/SLIDE values, current note/velocity, native curve/root rule and original held input release. No generic sliders replace these values.

Change / reconsider Same step3+12 correction remains inside GEN with the existing held-step editor. A compact scale/seed context remains in its heading.

Purpose Keep sound-shaping/generation context while making an intentional cell correction. This is a proposal; current firmware requires SEQ first.

Controls Actual equivalent corrected cell: GEN to SEQ to hold physical9 to OCT+ to release to ARP. Proposed holds physical9 directly in GEN.

Action cost Source control sequence observed; proposed model will exercise the two fewer page presses.

Limits / tradeoff Before is actual current SEQ held editor; after is proposed GEN held editor with the same authored cell/flags, deliberately different view. This pair is labelled as a route comparison, not identical view or hidden runtime state. Actual known phrase has current LED NOTE/TIE masks; exact raster/font/live timing parity remains unqualified.

One instrument: what is concrete, what remains

Playing and editing Keep useful lower controls, fast parameter routes, native Chicago ADSR, Miami vocabulary and large bright Juno values. Held-step editing uses the current large white note/gate/accent/slide values. Drum pictures, source pad colours and physical button feedback work together; the piano keys have no lights.

Sequencing and performance The proposal connects absolute64-step editing, parameter scope, motion write/override/clear, independent cues/mutes, occupied five-part copy and scoped panic. Proposed feedback adds context without extra navigation. Recognition, glare and pressure-use tradeoffs still need assessment.

Generator and correction Current NEW/MUTATE, root/scale/seed and all eight generator controls are retained. Public generator mathematics is checked separately from audio. Select-only GEN cell focus reuses the large held editor and removes the SEQ-and-back detour. Short taps do not write/delete. Native history grouping/capacity and automatic mutation scheduling remain separate limits.

Recording and recovery Current stopped entry retains accent/slide modifiers and their consumed releases, correction and repeated entry. The37-key inspection surface now routes GRID, track and admitted live roles. Full running/poly recording, durable save/reload and complete recovery still need work; a lamp or signal activity is not a saved take.

Sound and presets Existing engine identity and sound-control vocabulary stay. Active Drone work is deferred without silently converting saved data. Preset/held-note decisions must be settled before recording-strategy and save/recovery choices are frozen. Juno interface work is not proof of AudioKitJ6 sound fidelity.

Connected use and BREAK The no-host Loopy comparison keeps its original body/lower pixels. Real host/peer operation, full FX/controller work, clock handover and a populated BREAK slice/live-release journey remain unfinished. An unavailable loop is not a successful performance.

Settings The separate Settings presentation is retained unchanged in the walkthrough, including six paired tasks. Its actual-before evidence is historical25.x, not current3c41. Common-header and held-note continuity integration remain open.

How to read the evidence

Actual versus proposed Actual captures execute source3c41 with its pinned0.0.26 Elite package and runtime. Accepted d158 shares the relevant UI files but is not an executed package here. No proposed R7 firmware exists. Historical captures, current emulator output, source math and browser model checks are separate.

Equivalent states Each page states its known start, control sequence and remaining differences. Miami/no-host Loopy reuse native body/lower pixels. Motion phase and mixed-source copy are explicit model fixtures. The GEN held-editor pair compares the same corrected cell across the current SEQ route and the proposed GEN route; it deliberately changes view.

Source strengths Current dynamic engine labels, native ADSR/Juno vocabulary, direct lower controls, large held values and source button/pad meanings are retained strengths. Repairing a prototype omission is not a new firmware feature. New feedback must prove useful in real tasks.

Review and checks The previous revision was useful WIP, not a completed overhaul. This successor requires its own independent affected assessment. Browser, source-math, native-image and document checks support only their named scope; counts do not establish musical success.

Power The platform exposes coarse0-3bars, USB-host power or unknown. It has no calibrated percentage or genuine charging line. Top status remains compact and consistent without inventing precision.

Delivery and remaining work This standard PDF and the separate native PNGs are the owner presentation. The self-contained walkthrough is for interaction inspection. Actual iOS-device opening and physical display/control tests remain unrun. Whole audible ideas, repeated takes, recovery, resources, competitor lessons and remaining instrument journeys still require evidence. Design delivery is not runtime implementation approval.