

EXPERIMENT NO: 17

UART INTERFACING USING INTERRUPT IN KEIL

AIM:

To receive serial data using interrupt.

APPARATUS REQUIRED:

- PC with Windows OS
- Keil μ Vision IDE
- 8051 Simulator (Keil built-in)
- Serial Window (UART #1)

PROGRAM:

```
#include <reg51.h>

void serial_ISR(void) interrupt 4
{
    if(RI)
    {
        P1 = SBUF;
        RI = 0;
    }
}

void main()
{
    TMOD = 0x20;
```

TH1 = 0xFD;

SCON = 0x50;

TR1 = 1;


ES = 1;

EA = 1;

while(1);

}

OUTPUT:

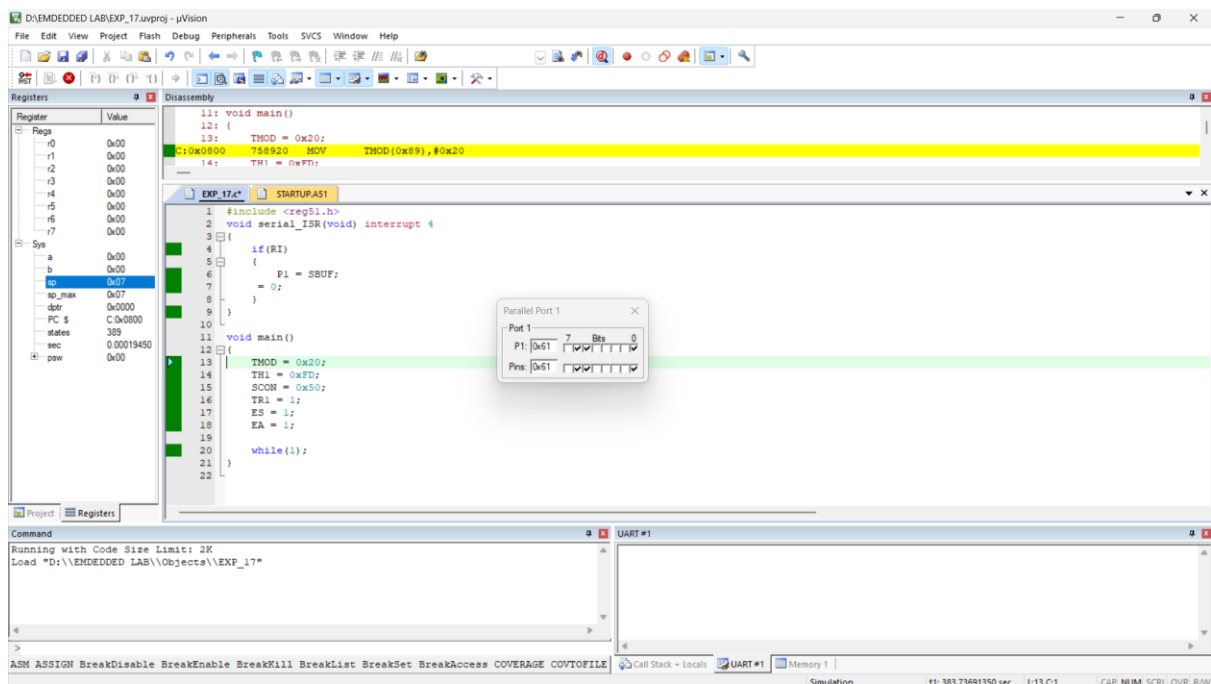

RESULT:

Thus the serial data was received using Interrupt and the received data was verified.