

# Coupled Laser Simulation Updates

Godwin Duan

July 2025

## Introduction and Goals

I wish to investigate the behavior of a system of lasers which are coupled to one another. In this project, I model the system as a set of Coupled Lang-Kobayashi Equations. This set of first-order, delay differential equations are solved numerically by a Python program.

**Goal:** to use this laser model to simulate the behavior of a physical compute reservoir (PRC). We will compare this (simulated) reservoir's ability to perform classification/prediction tasks against a traditional neural network.

**Motivation:** It is a slow and costly process to build an actual chip of lasers in the cleanroom, so we first verify that a system of lasers can function as a PRC in software before we actually go build it. This simulation process will also give us intuition into how the lasers should be patterned on our chip and how they should be driven/read out for best performance.

In these notes I primarily reference "Semiconductor Lasers: Stability, Instability, and Chaos" by Ohtsubo [1], which I have been reading since mid-June.

My code and figures can be found in my GitHub repo: <https://github.com/godwinduan/lasersim>

## 1 July 9-10, 2025

Began coding the Coupled Lang-Kobayashi Equations.

### 1.1 Coupled Lang-Kobayashi Equations

For a system of  $n$  lasers, the differential equations for the field in laser  $j$  are given by:

$$\begin{aligned} \frac{dE_j(t)}{dt} = & \frac{1}{2}(1 - i\alpha)(G_j - \gamma)E_j(t) + \frac{\kappa_{jj}}{\tau_{in}}E_j(t - \tau_{jj})\exp(i\omega_j\tau_{jj}) \\ & + \sum_{k=0, k \neq j}^{n-1} \frac{\kappa_{jk}}{\tau_{in}}E_k(t - \tau_{jk})\exp(-i\Delta\omega_{jk}\tau_{jk}) \quad (1) \end{aligned}$$

where  $\kappa_{jk}$  is the coupling strength from  $k$  to  $j$ ,  $\tau_{jk}$  is the time delay from  $k$  to  $j$ , and  $\Delta\omega_{jk} = \omega_k - \omega_j$ .

The first term on the right is increase in field from the laser's own field. The second term on the right is the self coupling of the laser (has a delay  $\tau_{jj}$ ). The third term on the right is the coupling from all other lasers.

To code this, we have to break up the above expression for  $E$  into a real component  $X_j(t)$  and imaginary component  $Y_j(t)$  such that  $E_j(t) = X_j(t) + iY_j(t)$ .

$$\begin{aligned} \frac{dE_j(t)}{dt} = & \frac{1}{2}(G_j - \gamma)E_j(t) - i\alpha\frac{1}{2}(G_j - \gamma)E_j(t) + \frac{\kappa_{jj}}{\tau_{in}}E_j(t - \tau_{jj})\cos(\omega_j\tau_{jj}) + i\frac{\kappa_{jj}}{\tau_{in}}E_j(t - \tau_{jj})\sin(\omega_j\tau_{jj}) \\ & + \sum_{k=0, k \neq j}^{n-1} \frac{\kappa_{jk}}{\tau_{in}}E_k(t - \tau_{jk})\cos(\Delta\omega_{jk}\tau_{jk}) - i\sum_{k=0, k \neq j}^{n-1} \frac{\kappa_{jk}}{\tau_{in}}E_k(t - \tau_{jk})\sin(\Delta\omega_{jk}\tau_{jk}) \quad (2) \end{aligned}$$

After we expand  $E$  into  $X$  and  $Y$  and distribute terms,

$$\begin{aligned} \frac{dX_j(t)}{dt} = & \frac{1}{2}(G_j - \gamma)(X_j(t) + \alpha Y_j(t)) + \frac{\kappa_{jj}}{\tau_{in}}(X_j(t - \tau_{jj})\cos(\omega_j\tau_{jj}) - Y_j(t - \tau_{jj})\sin(\omega_j\tau_{jj})) \\ & + \sum_{k=0, k \neq j}^{n-1} \frac{\kappa_{jk}}{\tau_{in}}(X_k(t - \tau_{jk})\cos(\Delta\omega_{jk}\tau_{jk}) + Y_k(t - \tau_{jk})\sin(\Delta\omega_{jk}\tau_{jk})) \quad (3) \end{aligned}$$

$$\begin{aligned} \frac{dY_j(t)}{dt} = & \frac{1}{2}(G_j - \gamma)(Y_j(t) - \alpha X_j(t)) + \frac{\kappa_{jj}}{\tau_{in}}(Y_j(t - \tau_{jj})\cos(\omega_j\tau_{jj}) + X_j(t - \tau_{jj})\sin(\omega_j\tau_{jj})) \\ & + \sum_{k=0, k \neq j}^{n-1} \frac{\kappa_{jk}}{\tau_{in}}(Y_k(t - \tau_{jk})\cos(\Delta\omega_{jk}\tau_{jk}) - X_k(t - \tau_{jk})\sin(\Delta\omega_{jk}\tau_{jk})) \quad (4) \end{aligned}$$

For the carrier density of laser  $j$ ,

$$\frac{dN_j(t)}{dt} = \frac{I_j}{e} - \gamma_e * N_j - G_j * |E|^2 \quad (5)$$

Where  $|E|^2 = X^2 + Y^2$ , and

$$G_j = \frac{g(N_j - N_0)}{1 + s|E|^2}$$

## 1.2 Comments

- Question: is it plus alpha or minus alpha in the Lang-Kobayashi Equation? In Ohtsubo's textbook, it is minus (see Ohtsubo 87), and I am following this convention, but in the original Lang-Kobayashi paper (and in Chixuan's work), it is plus alpha. As a result my equations' signs differ from Chixuan's equations on slide 11 of her generals presentation.
- I'm using individual frequencies. This is because the self-coupling term requires the laser's absolute (not relative frequency). See Ohtsubo pg. 186 for explanation of where the  $i\Delta\omega E$  term comes from. Chixuan uses this but I do not.
- We aren't missing a cavity leaking term gamma in the above equation for carrier density since the carrier density doesn't depend on that.

## 2 July 11, 2025

Finished coding the Lang-Kobayashi Equations. Changed kappa values to make them dimensionless, following the convention adopted in Ohtsubo's textbook. (Chixuan had kappa include the divisor term  $\tau_{in}$ , the round trip time inside the cavity.

Ran some sample simulations:

### 2.1 One Laser Simulations

Tweaking parameters of  $\kappa$ , the self-coupling coefficient,  $\tau$ , the delay time it takes for the laser to couple to itself, and  $I_{injection}$ , both stable and chaotic behavior was observed in the single self-coupled laser.

Below in Fig. 1 the laser is biased just above threshold current and is very weakly coupled to itself. Only relaxation oscillations are observed.

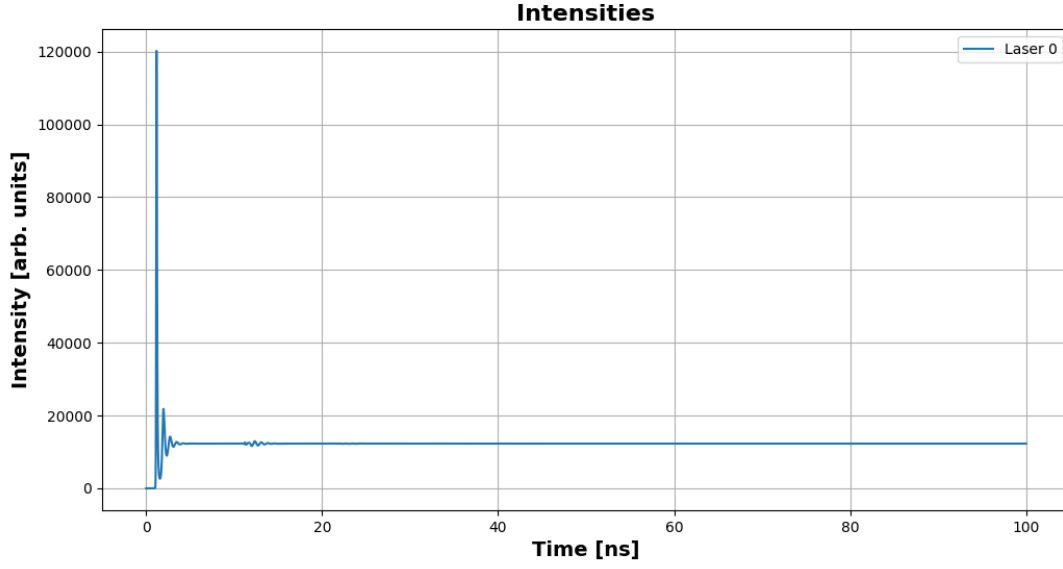


Figure 1: Intensity of relaxation oscillation of a single self coupled laser w/  $\kappa = 0.0012$ ,  $\tau = 10\text{ns}$ ,  $I_{\text{injection}} = 18\text{mA}$ .

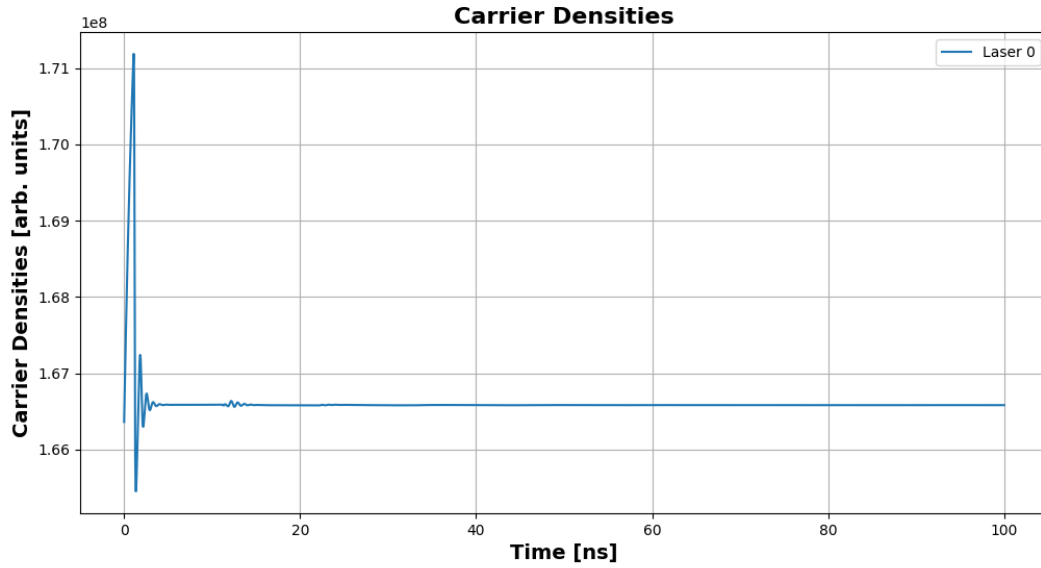


Figure 2: Carrier density during relaxation oscillation of a single self coupled laser w/  $\kappa = 0.0012$ ,  $\tau = 10\text{ns}$ ,  $I_{\text{injection}} = 18\text{mA}$ .

Also shown here is the carrier density inside the laser. This is something we can measure if needed by measuring the voltage across the laser junction. See Ohtsubo pg. 435 for how voltage relates to carrier density.

Increasing the self-coupling, we now observe chaotic oscillations, shown in Fig. 3.

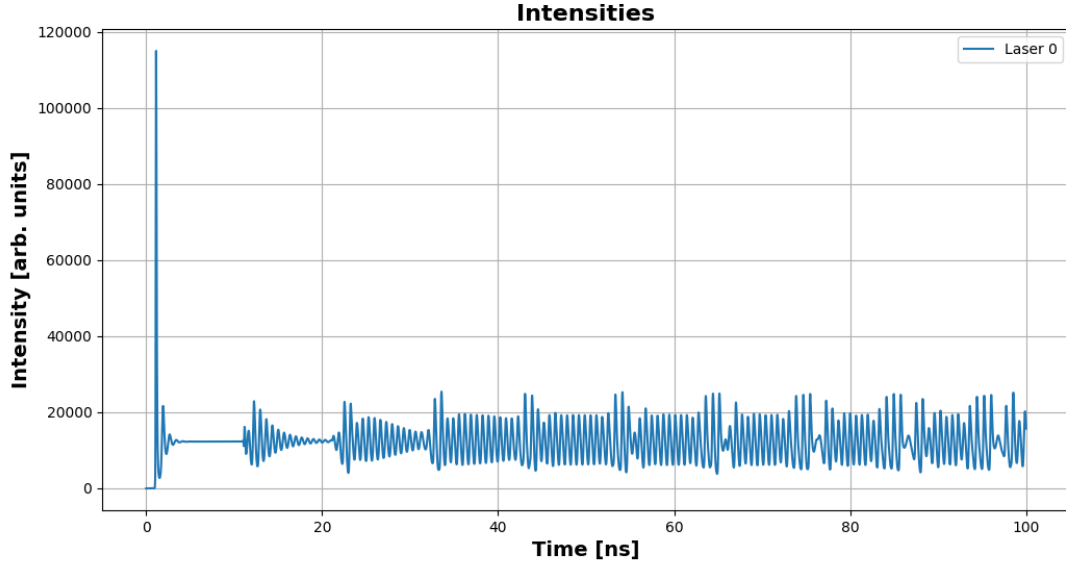


Figure 3: Relaxation oscillation of a single self coupled laser w/  $\kappa = 0.012$ ,  $\tau = 10\text{ns}$ ,  $I_{\text{injection}} = 18\text{mA}$ .

Further increasing the self-coupling, and also increasing the injection by a few mA, we can observe periodic oscillations, shown in Fig. 4.

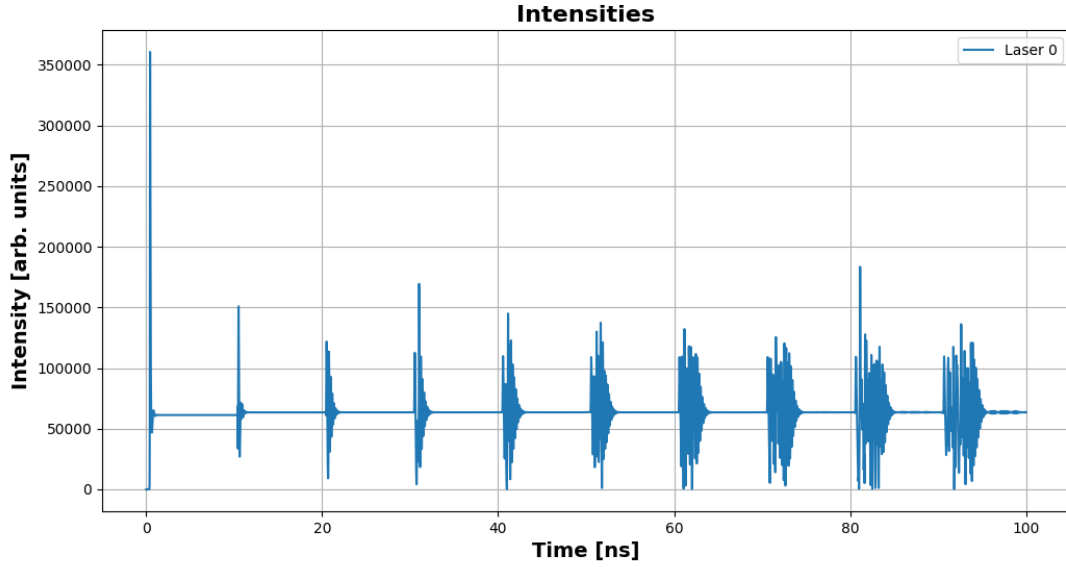


Figure 4: Relaxation oscillation of a single self coupled laser w/  $\kappa = 0.12$ ,  $\tau = 10\text{ns}$ ,  $I_{\text{injection}} = 22\text{mA}$ .

## 2.2 Two Lasers Simulations

I played around with changing the coupling parameters/delay times for two lasers coupled together. Highly chaotic behavior can be observed; here is an example where laser 0 is coupled to laser 1 as well as to itself. Both lasers are being driven at their threshold currents. Both lasers oscillate rapidly between on and fully off, shown in Fig. 5.

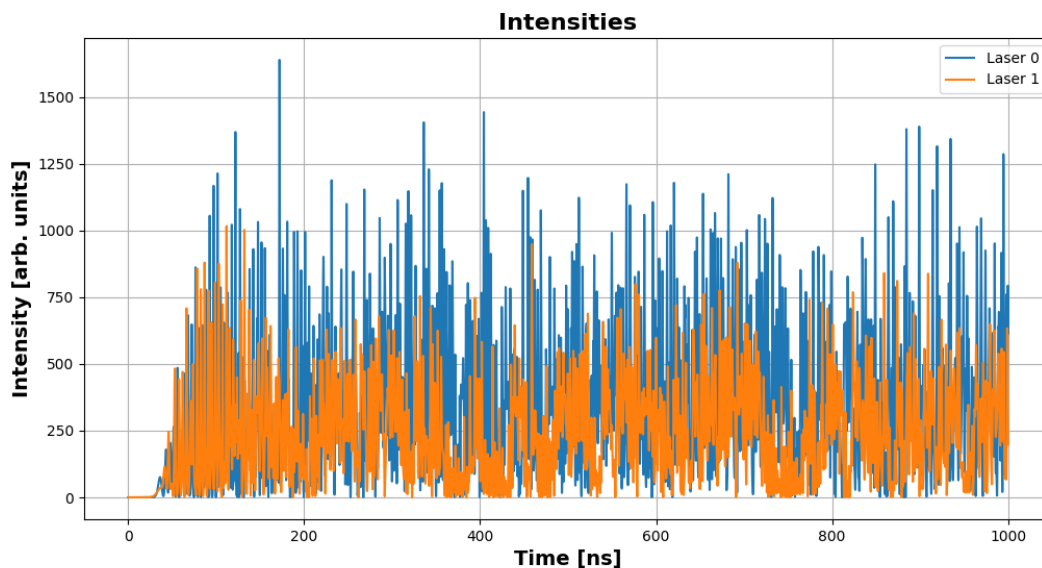


Figure 5: Highly chaotic oscillations of a two coupled lasers.

## 2.3 Comments

- Want to take the FFT of the chaotic oscillations to see its frequency spectrum
- What is the speed of the photodetectors that we can build on-chip? I have read they have a response of 1-10MHz. If it's too slow, we won't be able to see this phenomena.
- We could try to induce some kind of low-frequency fluctuations (LFF) (see Ohtsubo pg. 140) that would be slow enough detectable. This requires a long delay time. I wonder if we attach a single long fiber optic cable, to a system containing multiple coupled lasers, if this would offer enough long-term memory.
- Next step: add in code a way to be able to change the injection current during the simulation. Right now it is constant.

## References

- [1] J. Ohtsubo, Semiconductor lasers and theory, in: Semiconductor Lasers: Stability, Instability and Chaos, Springer, 2017, pp. 33–82.