

PLYWOOD MANUFACTURER & EXPORTER

WOOD PANEL EXPORT CATALOG · 2026

Engineered wood panels, built for export.

Film faced plywood · Commercial plywood · Furniture panels · LVL & H20 formwork systems
— with coordinated quality control, export packing and order follow-up from Xuzhou, China.

One export team from specification to shipment.

Xuzhou Yongxiang Wood Industry Co., Ltd. manufactures and exports engineered wood panels with coordinated quality control, export packing and order follow-up for importers, distributors, contractors and furniture manufacturers in 30+ countries. From Xuzhou, one of China's established wood panel manufacturing centers, Yongxiang coordinates product matching, production, quality checks, packing and shipment follow-up through one export team.

2011 ESTABLISHED	30,000 m² WORKSHOP SPACE	120,000 m³ ANNUAL CAPACITY	30+ EXPORT COUNTRIES
----------------------------	---	---	--------------------------------



Factory 1

Focus: PP plastic faced plywood, LVL, H20 timber beams and furniture panels, supported by in-house quality testing.



Factory 2

Focus: film faced plywood, commercial plywood, fancy plywood and melamine laminated plywood for construction and furniture applications.

BUILT FOR IMPORT BUYERS

One export team keeps specifications, packing marks, documents and delivery updates aligned from quotation to container loading.

IN THIS CATALOG


03 Production workflow	04 Quality & certifications	05 Export markets	06 Formwork & construction panels
10 Commercial & specialty plywood	12 Furniture & interior panels	14 Engineered wood systems	16 How to inquire

Twelve visible steps, from log to loaded container.


Our typical production workflow shows how panels move from veneer preparation through pressing, calibration and lamination to inspection, edge sealing and export packing before container loading.




01 Log selection & peeling

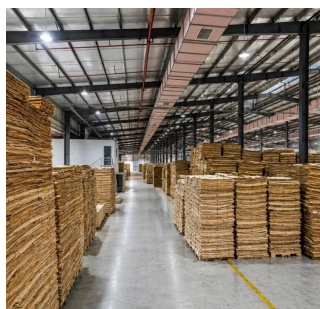


02 Veneer drying

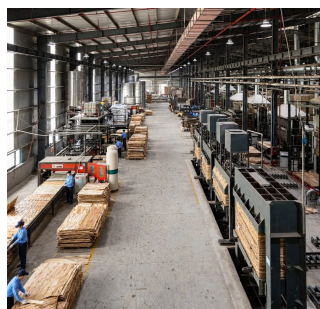

03 Gluing & lay-up

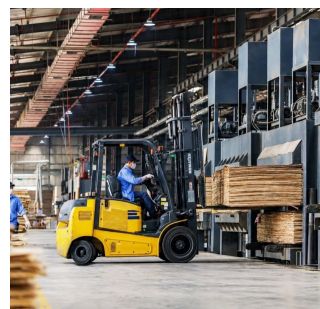

04 Cold press

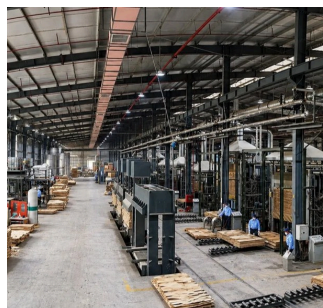

05 Hot press



06 Surfacing putty



07 Sanding




08 Trimming




09 Surface lamination



10 QC inspection

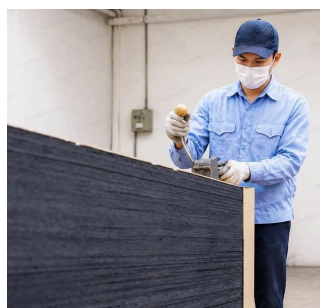


11 Edge sealing

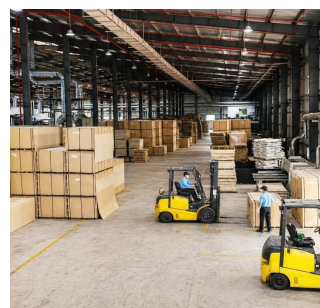

12 Packaging & shipping

Quality checks and order-specific documents.

Our on-site testing room performs routine checks on glue bonding, bending performance and water resistance, followed by a pre-shipment release check. Test scope and acceptance criteria are aligned to the confirmed product specification.

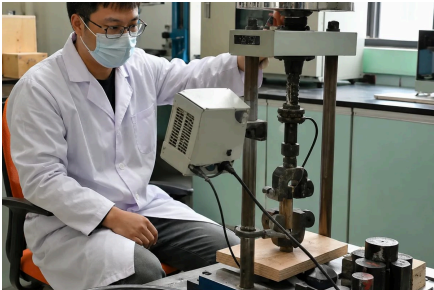

Bonding strength




Modulus of rupture



Modulus of elasticity



Water boiling test

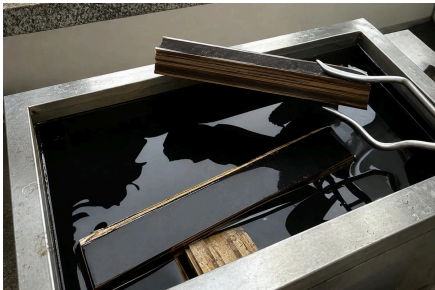

72-hour boiled panel



Pre-shipment release

AVAILABLE CERTIFICATION AND COMPLIANCE FILES



ISO 9001
Management system certificate



FSC
Chain-of-custody documentation



CE / EN 13986
Product conformity documents



AS 6669
Formply scope where applicable

Management system
ISO 9001 and factory-level management documentation.


Product / market files
FSC, CE, CARB / EPA TSCA VI, AS 6669 and traceability files where applicable.

Order documents
Inspection records, packing lists, loading photos and test reports as confirmed for the order.

Scope note: Certificate holder, product scope, validity and document availability are confirmed before quotation. Specifications, performance and certification availability vary by product and order. Final details are subject to the confirmed quotation and contract.

From Xuzhou to your destination port.

We match specification, certification and packing to the destination market — tell us where the container is going and we quote to that market's real requirements.

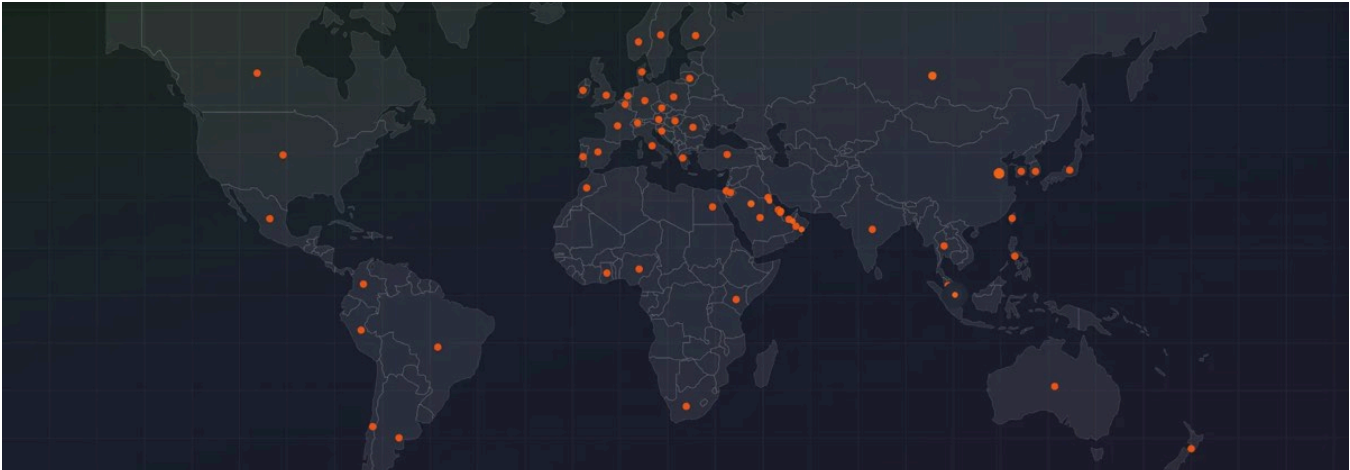

Europe

CE marking, EUDR traceability, formaldehyde class and documentation files.

Middle East

Film faced plywood and formwork supply with strong pallet packing and project shipment planning.

North America

CARB / EPA TSCA VI documentation where applicable, plus confirmed product specification files.

Oceania

Formply documentation where applicable, moisture control, ISPM 15 packing and shipment files.

Southeast Asia

Mixed containers combining construction panels, furniture boards and LVL products.

Africa

Distributor-ready packing, practical specifications and EXW / FOB quote support.

EXPORT PACKING AS STANDARD

Panels ship on export pallets with waterproof wrapping, steel strapping, corner protection and buyer shipping marks. Loading photos and document sets are provided according to order requirements.

FILM FACED PLYWOOD

Brown/Red/Black Film Faced Plywood


Structural engineered wood panel for concrete formwork and heavy-duty industrial use, available in multiple sizes, cores, glues and film colors.

4-35 mm

Custom sizes

Indicative reuse target*

MR / Melamine / Phenolic

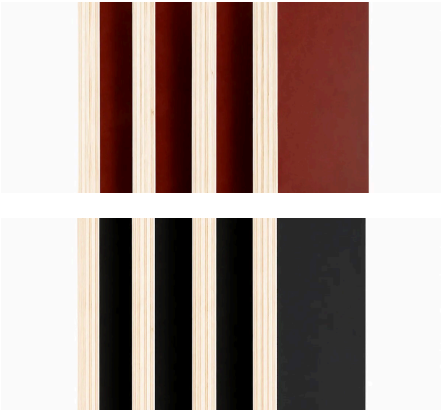

TECHNICAL SPECIFICATIONS

Size (mm)	610 x 2440, 625 x 2500, 1220 x 2440, 1250 x 2500; custom sizes available
Thickness (mm)	4, 6, 9, 12, 15, 18, 21, 35
Thickness tolerance	+/- 0.5 mm
Film color	Brown, black, red, yellow or blue
Core	Birch, eucalyptus, poplar, pine, combi or recycled
Glue	MR, melamine-modified or phenolic bonding options
Reuse times	Indicative target: 15-20 cycles under suitable site conditions*
Density	500-630 kg/m ³
Moisture content	8%-12%
Edge sealing	Sealed with waterproof paint

APPLICATIONS

- Concrete wall, slab and bridge formwork
- Construction site reusable panels
- Project supply for contractors and formwork distributors
- Container orders with OEM marks and export packing

WHY BUYERS CHOOSE IT

- Clean concrete finish**
Smooth film surface helps improve concrete release and reduce finishing work.
- Moisture resistance**
Coated face and sealed edge options help limit water absorption during site use.
- Custom structure**
Core, glue, thickness and film color can be matched to project requirements.

Confirm before order: Confirm thickness tolerance, moisture content, density, film weight, edge treatment and expected site-use conditions. Performance and document availability are subject to the confirmed quotation and contract.

PP Plastic Faced Plywood

PP plastic faced formwork plywood with a durable waterproof surface, designed for repeated use in high-rise, bridge and humid construction projects.

- 12-21 mm
- Indicative reuse target*
- PP surface
- Melamine / Phenolic



TECHNICAL SPECIFICATIONS	
Size (mm)	610 x 2440, 625 x 2500, 1220 x 2440, 1250 x 2500; custom sizes available
Thickness (mm)	12, 15, 18, 21
Thickness tolerance	+/- 0.5 mm
PP color	Green, blue or multicolour
Core	Birch, eucalyptus, poplar, pine, hardwood or combi
Glue	Melamine / Phenolic
Reuse times	Indicative target: 25-30 cycles under suitable site conditions*
Density	550-680 kg/m³
Moisture content	8%-12%
Edge sealing	Sealed with waterproof paint

APPLICATIONS

- Concrete formwork panels for repeated site use
- Projects needing easier panel cleaning
- Contractor and formwork distributor supply
- Mixed container orders with film faced plywood

WHY BUYERS CHOOSE IT

- Easy cleaning**
Plastic face can be cleaned more easily after concrete contact.
- Durable surface**
PP overlay helps resist abrasion during normal formwork handling.
- Specification control**
Core, glue, size and edge treatment can be adjusted by project.

Confirm before order: Confirm thickness tolerance, moisture content, density, PP overlay, edge treatment and expected site-use conditions. Performance and document availability are subject to the confirmed quotation and contract.

Slip-resistant Plywood

High-performance anti-slip plywood for wet, oily, dusty and high-traffic working environments.

- 9-25 mm
- Anti-slip surface
- 550-680 kg/m³
- Custom sizes



TECHNICAL SPECIFICATIONS	
Size (mm)	610 x 2440, 625 x 2500, 1220 x 2440, 1250 x 2500 or custom
Thickness (mm)	9-25
Thickness tolerance (mm)	+/-0.5
Surface	Wire mesh, hexagon or other anti-slip patterns
Core	Poplar, hardwood or combi core
Glue	Exterior or moisture-resistant glue options
Density (kg/m³)	550-680
Moisture content (%)	8-12
Edge sealing	Sealed edge available
Packing	Export pallets, wrapping, marks and container loading support

APPLICATIONS

- Scaffolding platforms and temporary flooring
- Vehicle floors, trailers and loading decks
- Industrial walkways and service platforms
- Construction site access panels

WHY BUYERS CHOOSE IT

- Safer surface**

Textured face improves grip for walking and platform use.
- Strong panel base**

Plywood core gives practical strength for site and vehicle applications.
- Custom pattern**


Surface pattern, thickness and core can be matched to buyer demand.

Confirm before order: Confirm thickness tolerance, core, glue, surface pattern, edge treatment and intended loading conditions. Performance and document availability are subject to the confirmed quotation and contract.

Formply

Structural phenolic film-faced plywood supplied to confirmed grade, standard and documentation requirements for concrete formwork.

- F14 / F17 / F22 options*
- AS/NZS scope*
- A-bond option
- Black HDO film

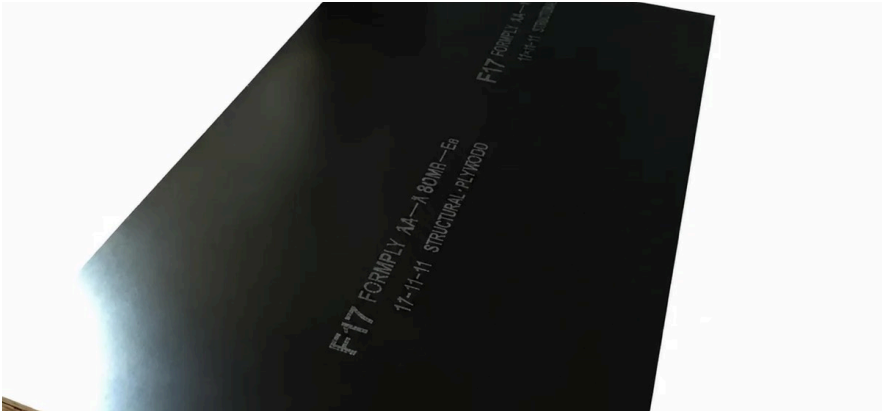

TECHNICAL SPECIFICATIONS	
Standard	AS/NZS 2269 / AS 6669 where specified and supported by order documents
Stress grade	F14, F17 or F22 options subject to confirmed order documentation
Standard size	1200 x 1800, 1200 x 2400 or project-specified size
Thickness	12, 15, 17, 18 or 21 mm
Surface	Double-sided black HDO phenolic resin film
Core	Cross-laminated high-density hardwood veneers
Glue	Fully waterproof phenol formaldehyde A-bond
Edge sealing	All panel edges fully sealed
Application	Concrete pouring and structural formwork
Packing	Export pallets, protective wrapping and shipping marks

APPLICATIONS

- Building and infrastructure concrete formwork
- Contractor project purchasing
- Distributor stock for construction markets
- OEM branded formwork panel supply

WHY BUYERS CHOOSE IT

- Concrete finish**
Overlay surface supports cleaner concrete release.
- Project matching**
Specifications can be matched to contractor habits and market demand.
- Stable dimensions**
Panel sizes and thicknesses are controlled for repeat orders.

Confirm before order: Confirm required standard, stress grade, thickness tolerance, supporting documents and intended formwork system. Performance and document availability are subject to the confirmed quotation and contract.

COMMERCIAL & SPECIALTY PLYWOOD

Commercial Plywood Range

Okoume, birch, bintangor and pine faced plywood share one flexible production platform — pick the face veneer for your market, then match core, glue, grade and size to the order.



Okoume Plywood

Smooth okoume-faced plywood for furniture, cabinetry, interiors and general woodworking.



Birch Plywood

Clean birch-faced plywood for cabinets, furniture, interior components and general panel supply.



Bintangor Plywood

Red-toned bintangor-faced plywood for furniture, decoration and general woodworking.



Pine Plywood

Natural pine-faced plywood for furniture, packing, decoration and interior applications.

TECHNICAL SPECIFICATIONS	
Face / back	Okoume, birch, bintangor, pine or buyer-specified veneer
Core	Poplar, eucalyptus, birch, pine, tropical hardwood or combi
Grade	BB/BB, BB/CC, DBB/CC, CC/CC, C/D, D/E or custom
Bonding options	MR, melamine-modified or phenolic WBP
Emission options	E1, E2 or order-specified requirement
Standard size	1220 x 2440, 915 x 1830, 1200 x 2400 or 1250 x 2500 mm
Special size	Door size and long-panel sizes available
Application	Furniture, interiors, packing and general woodworking
Packing	Export pallets with wrapping and shipping marks

QUICK SELECTION GUIDE		
Face veneer	Visual character	Typical applications
Okoume	Light, even face	Furniture, cabinetry, interiors
Birch	Clean, durable face	Cabinets, components, general panels
Bintangor	Red-toned decorative face	Furniture and interior decoration
Pine	Natural wood appearance	Furniture, packing and interiors

Confirm face and back grade, core, bonding system, emission requirement, size, thickness, quantity and destination port before quotation. Specifications, performance and certification availability vary by product and order. Final details are subject to the confirmed quotation and contract.

COMMERCIAL & SPECIALTY PLYWOOD

Fancy Plywood

Decorative natural veneer plywood for cabinetry, furniture and interior design.

Natural veneer

Decorative face

2.5-18 mm

Interior use

TECHNICAL SPECIFICATIONS

Product type	Fancy, decorative or natural veneer plywood
Thickness	2.5, 2.7, 3.2, 3.6, 4.2, 4.6, 5, 5.2, 5.5, 12 or 18 mm
Face	Natural walnut, sapele, teak, ash, cherry or requested veneer
Core	Poplar, hardwood, eucalyptus or combi core
Glue	E1, E2, MR, melamine WBP or phenolic WBP
Size	1220 x 2440 mm or requested size



COMMERCIAL & SPECIALTY PLYWOOD

Flexible / Bending Plywood

One-direction flexible plywood for curved furniture, columns and shaped interior construction.

One-way bending

4-15 mm

1220 x 2440 mm

Curved interiors

TECHNICAL SPECIFICATIONS

Product type	Flexible plywood, flexi-board or bending plywood
Bending direction	Long grain or cross grain options
Thickness	4, 5, 6, 9, 10, 12 or 15 mm
Standard size	1220 x 2440 mm
Core	Specially constructed flexible veneer core
Surface	Raw surface for veneering or finishing



Specifications, performance and certification availability vary by product and order. Final details are subject to the confirmed quotation and contract.



MELAMINE BOARD

Melamine Board

Pre-finished decorative wood panel with melamine paper laminated onto plywood, MDF, particle board or block board substrates.

Plywood / MDF / particleboard

Wood grain / solid color

Texture options

Emission grade by substrate

TECHNICAL SPECIFICATIONS

Product name	Melamine Board / Melamine Faced Board
Surface	Melamine-impregnated decorative paper
Finish	Wood grain, solid color or texture finishes
Core substrate	Plywood, MDF, particle board or block board
Process	High-temperature and high-pressure lamination
Surface performance	Hard, seamless and wear-resistant



FINGER-JOINTED CORE PANEL

Finger-Jointed Core Panel

Engineered panel with a kiln-dried finger-jointed solid wood core for furniture, doors, cabinetry and interior production.

Finger-jointed core

Kiln-dried wood

Strong screw holding

Furniture & interiors

TECHNICAL SPECIFICATIONS

Product name	Finger-Jointed Core Panel (Blockboard / Joinery Board)
Core	Precision finger-jointed solid softwood strips
Core material	Kiln-dried pine, fir, poplar or buyer-specified wood
Face / back	Natural veneer faces or buyer-specified decorative surface
Structure	Balanced veneer faces bonded over a finger-jointed solid wood core
Thickness	Common furniture thicknesses or custom production

Specifications, performance and certification availability vary by product and order. Final details are subject to the confirmed quotation and contract.

MDF • Chipboard • OSB

Raw and melamine-faced substrate panels for furniture, interiors and structural sheathing — supplied alongside plywood in mixed containers.



MDF

Uniform MDF fiberboard with an ultra-smooth surface, stable structure and excellent machinability.

Thickness	2.5-30 mm or custom	Standard size	1220 x 2440, 1830 x 2440 mm or custom
Density	Standard or high-density options	Surface	Plain raw, sanded or melamine laminated



Chipboard

Economical engineered wood panel with stable dimensions and strong screw retention for mass furniture production.

Thickness	9-25 mm or custom	Standard size	1220 x 2440 mm or customized
Surface	Raw un-faced or melamine laminated	Structure	Homogeneous compressed wood chips and flakes



OSB

High-performance oriented strand board with consistent strength and waterproof resin options.

Product grade	OSB2, OSB3 or OSB4 options; confirm ordered grade and supporting documents	Thickness	6-25 mm or custom
Standard size	1220 x 2440, 1250 x 2500 mm or custom	Structure	Cross-laminated geometrically aligned wood strands

Full technical datasheets are available on request. Confirm grade, surface, size, thickness, bonding system, emission requirement and quantity for quotation. Specifications, performance and certification availability vary by product and order. Final details are subject to the confirmed quotation and contract.

ENGINEERED WOOD SYSTEMS

LVL

High-performance laminated veneer lumber for structural members, scaffold planks, industrial packing and engineered components.

Parallel veneer

Structural lumber

Custom section

Stable strength



TECHNICAL SPECIFICATIONS

Construction	Parallel laminated hardwood veneer layers
Section size	Custom thickness, width and length by order
Material	Poplar, pine, eucalyptus or mixed hardwood veneer
Glue	Waterproof structural adhesive
Strength direction	High unidirectional bending strength
Grade	Industrial, packing or construction grade
Application	Beams, scaffold planks, packing and components
Packing	Bundled export packing with marks

APPLICATIONS

- Construction beams and support members
- Scaffold planks and formwork components
- Industrial packing beams and pallets
- Custom engineered wood parts

WHY BUYERS CHOOSE IT

Directional strength

Parallel veneer construction supports demanding load-related applications.

Custom sizing

Length and section can be produced around project requirements.

Stable dimensions



Engineered layers help maintain predictable linear dimensions.

Confirm before order: Confirm section, length, moisture target, strength grade, glue class, tolerance and required test documents. Performance and document availability are subject to the confirmed quotation and contract.

H20 Beam

Reusable H20 timber beam for concrete formwork systems, wall formwork, slab support and construction projects.

- I-shaped beam
- WBP phenolic glue
- Protected ends
- Project supply

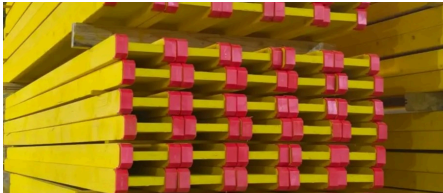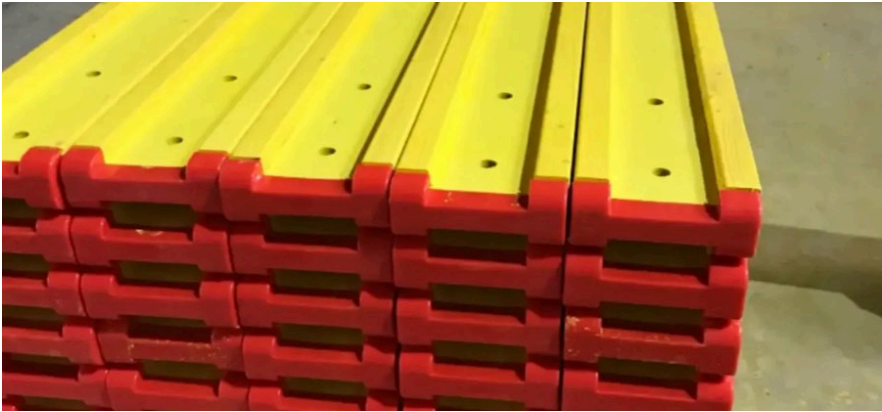

TECHNICAL SPECIFICATIONS	
Structure	I-shaped composite timber beam
Height	H20 beam profile
Length	Common lengths and custom lengths by order
Flange	High-density finger-jointed spruce solid wood
Web	Waterproof phenolic plywood or LVL board
Glue	WBP boil-proof phenolic glue
End protection	Plastic or metal end caps
Surface	Alkali-resistant yellow protective paint
Application	Wall, slab and support formwork systems
Packing	Bundled packing for container loading

APPLICATIONS

- Wall and slab concrete formwork systems
- Contractor project material supply
- Formwork distributor stock
- Mixed shipments with plywood and LVL

WHY BUYERS CHOOSE IT

- Composite structure**
Solid wood flanges and an engineered web create a stable formwork component.
- Site protection**
Protective paint and end caps reduce water and impact damage.
- Project matching**
Lengths, caps and marks can be arranged for project supply.

Confirm before order: Confirm beam length, dimensional tolerance, flange and web specification, end caps, test documents and packing method. Performance and document availability are subject to the confirmed quotation and contract.

Eight details, one accurate quotation.

Plywood pricing depends on specification. Send these eight details with your inquiry and we can prepare a quotation aligned to the confirmed product and shipment requirements.

01

Product & thickness
Panel type, thickness and tolerance requirement.

02

Panel size
Standard 1220 × 2440 mm or custom / door / long-panel sizes.

03

Face & surface
Face/back grade, film color or decorative surface.

04

Core & glue
Poplar, eucalyptus, birch, pine, combi; MR / E1 / WBP phenolic.

05

Quantity
Order volume in sheets, m³ or container count.

06

Certificates
CE, FSC, CARB / TSCA VI, AS 6669 or destination files needed.


07

Packing & marks
Pallet requirement, wrapping and buyer shipping marks.

08

Trade term
EXW or FOB, with the loading port confirmed before quotation.

ORDER FLOW



FAST LANE
WhatsApp is best for quick specification checks and photos: [+86 131 4520 9266](tel:+8613145209266). Email full RFQs, drawings and document lists to info@linstarwood.com.




Engineered wood panels, built for export.

Send Your Specification for a Quote



WEBSITE



WHATSAPP

WEBSITE

<https://www.linstarwood.com/>

EMAIL

info@linstarwood.com

WHATSAPP

+86 131 4520 9266

ADDRESS

No. 317, Xinhua First Village, Guanhu Town, Pizhou, Xuzhou, Jiangsu, China