a Axial Stroke Basin (300 K Gold, $\theta = 3^\circ$)

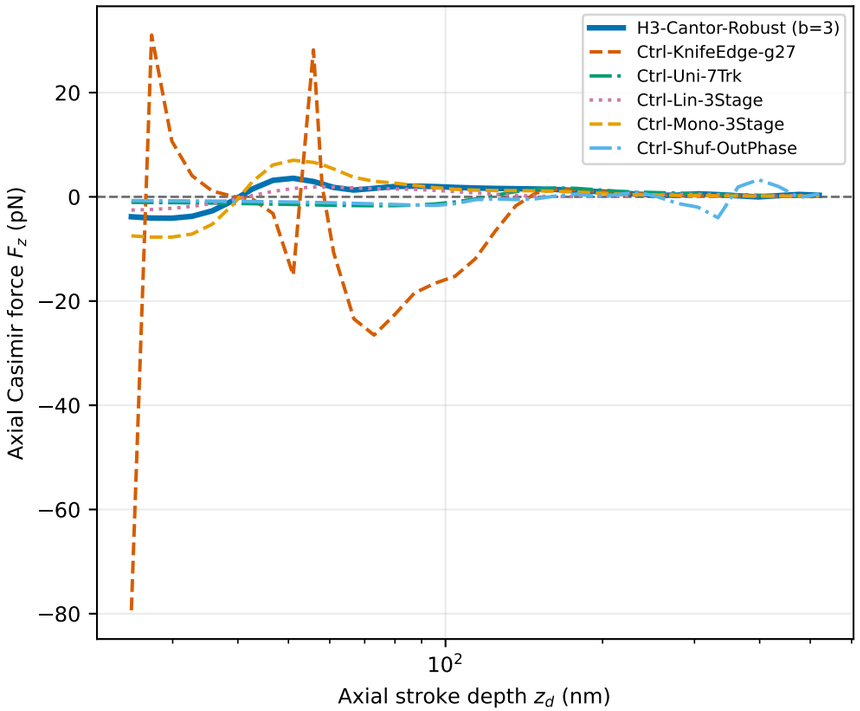

b Open-Window Angular Jitter Ripple ($[1.5^\circ, 4.5^\circ]$)

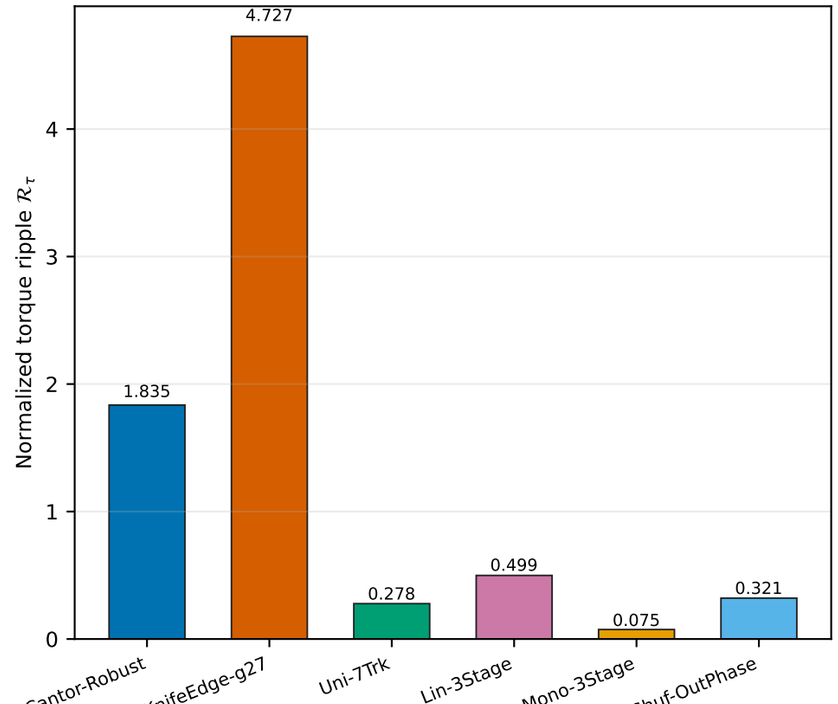

c Hermite FEM Stator Rib Elastostatic Safety

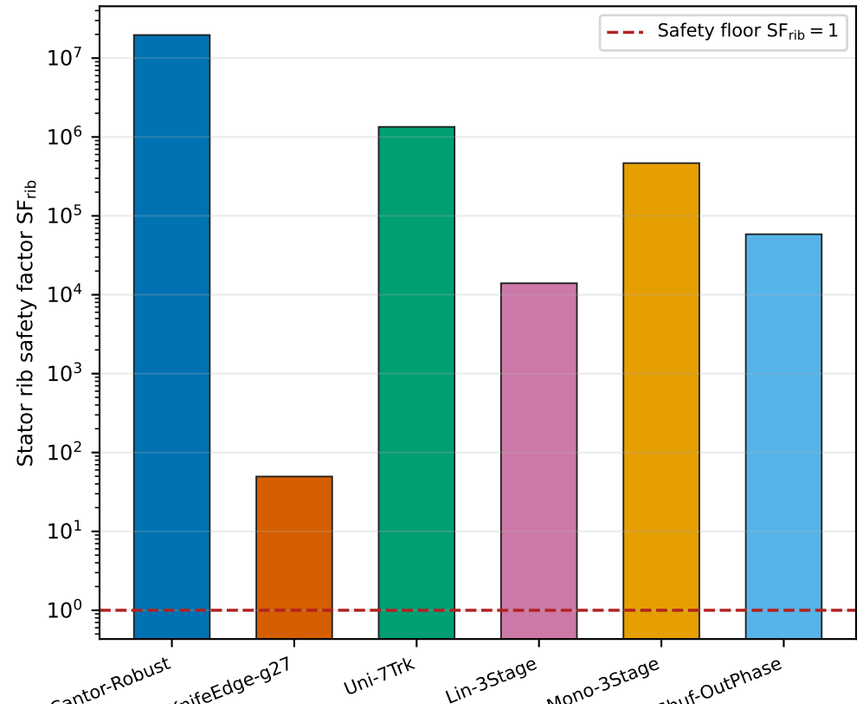

d Etch-Bias Survival & $N = 2{,}000$ Cleanroom Yield Y_{lab}

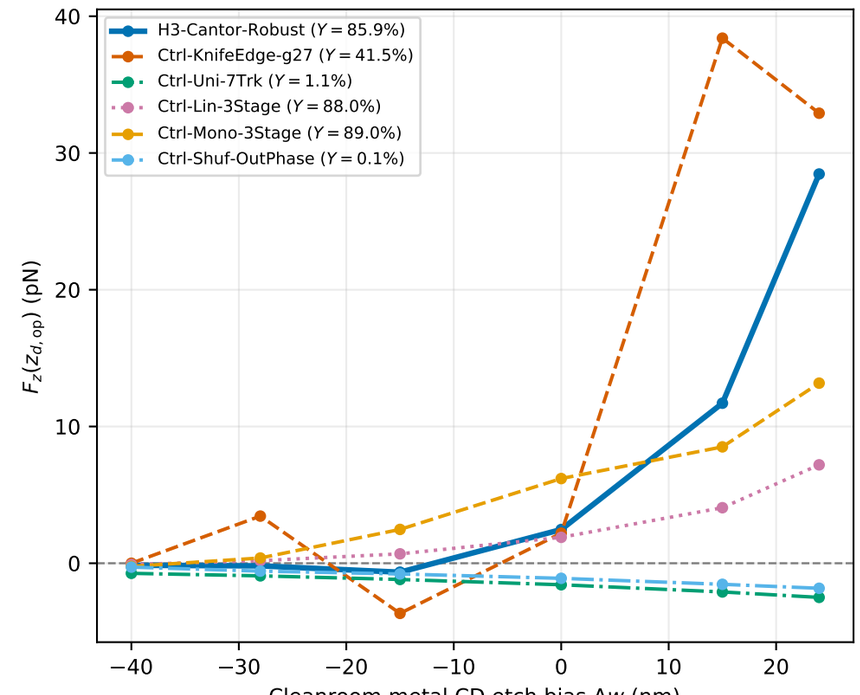

e Sub-Band Scale-Covering ($\Delta \ln \hat{\kappa} = 1.02, 0.15$ vs $\ln 3 = 1.10$)

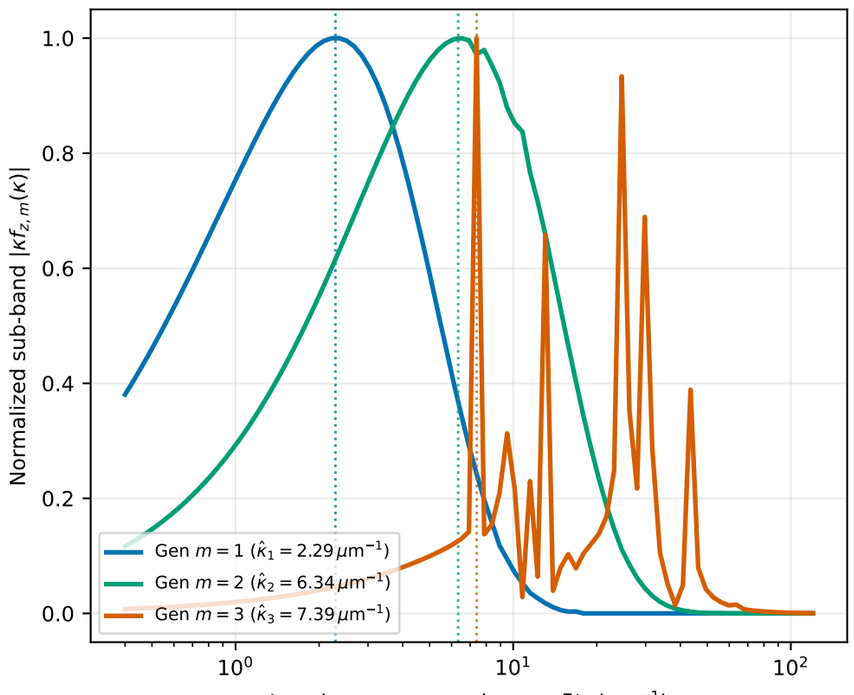
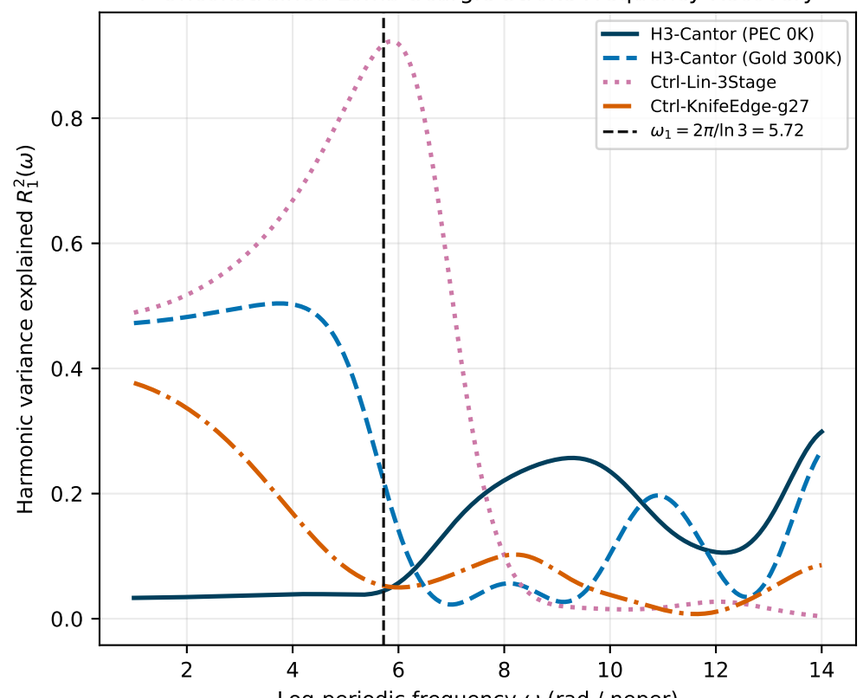
f Unconstrained Lomb-Scargle Stroke Frequency Recovery