

COLLAR TRACKER / r05h DESIGN REVIEW

PCB DFM complete. Electrical release on hold. IP68 unqualified.

TOP / 40 × 32 mm

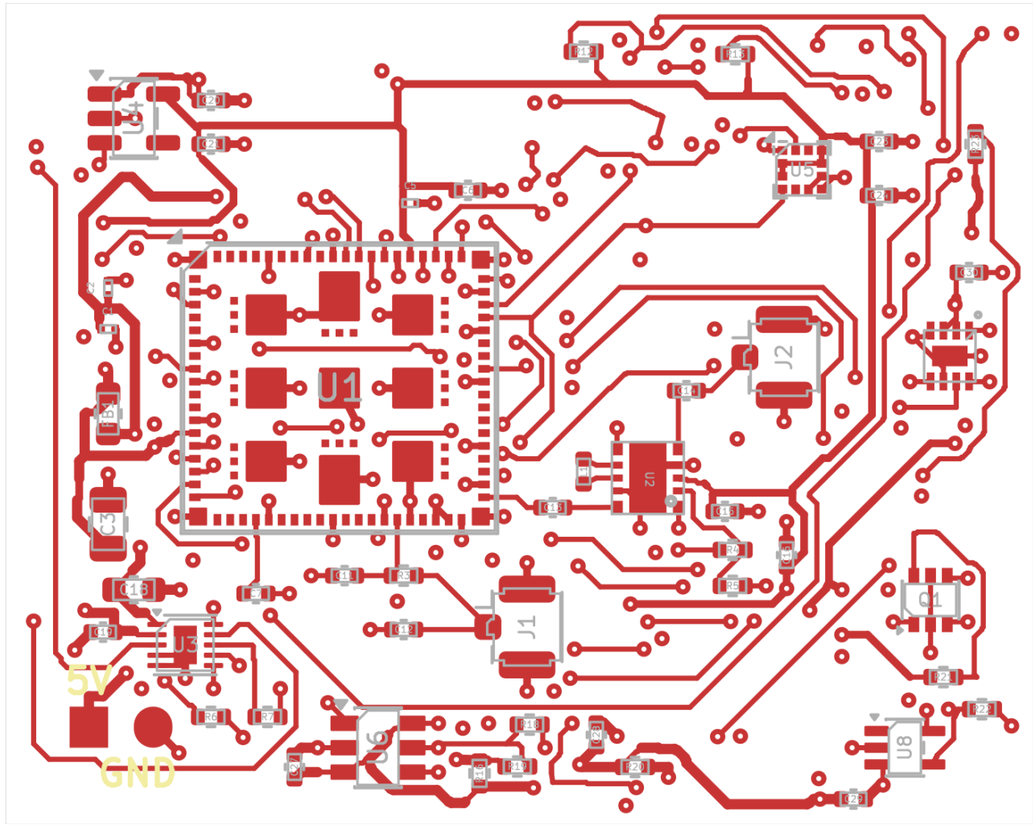

BOTTOM / mirrored component view

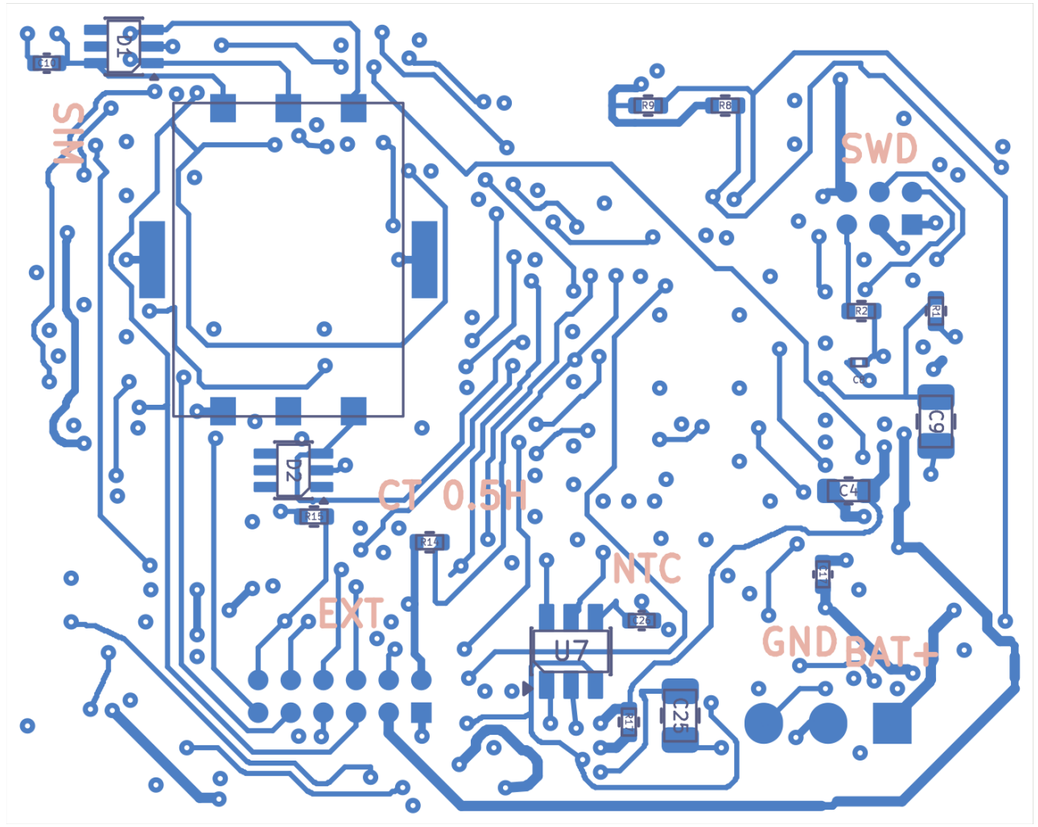

VERIFIED PCB CHECKS

Six layers; nominal thickness 0.8 mm; 71 footprints

Native DRC / ERC / connectivity / parity: zero findings


Two real JLC runs: 0 Danger / 0 Warning / 449 Good

Same ZIP and rules; all 29 rows analyzed; SMT off

94 unique GND terminals local; 110 GND vias

In1/In4: continuous GND; 128/128 return screens pass

RF geometry retained; actual stack / impedance open

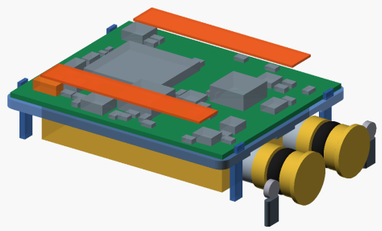

NOMINAL FIT

69 populated envelopes

30 shell checks pass

Rigid: 57.4 × 49.4 × 17.6

Boot: 60.4 × 52.4 × 22.4

2 m / 60 min: provisional

Pack, antennas, retention, seals and physical tests remain open.

Component boxes and orange antenna reservations are provisional.

PCB: aecb8e431819fa2aa23dfecc98ff1f6a064b5ae81afe7679a6e317f3571c3171

2026-10-25 | Bare-board DFM evidence only; BOM/CPL, factory programming and powered tests remain required.