
CT-BAT-001-A | Protected pack + temperature sensor

SUPPLIER REQUEST — dimensions and ratings need written confirmation

Requested pack body



Side section — budgets, not a supplier-approved stack

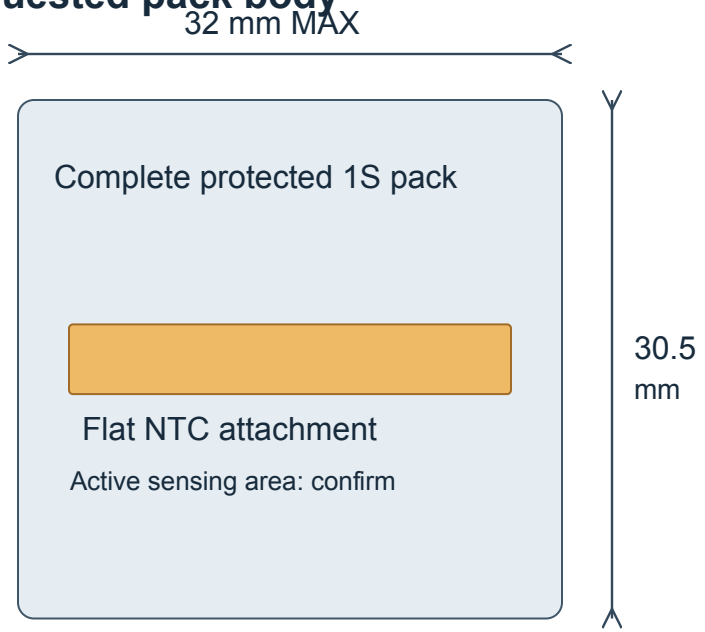

Body limit must include PCM, insulation and service swelling.
NTC: 26 x 4.1 x 0.5 mm; bond ≤0.15 mm; cover ≤0.10 mm.
Available complete assembly envelope: 33 x 31.5 x 6.2 mm.

Electrical requirements

Capacity	≥300 mAh; about 350 mAh preferred
Pack voltage	1S, 3.7 V nominal
Charge voltage	4.2 V ±0.5%; confirm compatible limits
Charge current	100 mA nominal; check 112 mA screen
Cell charging	0–45°C; hardware temperature interlock
Pack discharge	600 mA continuous design allowance
Charge finish	About 10 mA termination; 6 h nominal safety timer
Pulse rating	Return duration, duty and temperature limits
Sensor	10k ±1%; B3435 ±1%; attached to cell
Protection	Return thresholds, delays and recovery
Termination	Three insulated, factory-assembled outputs

Native board interface

J4.1 RED protected positive / VBAT
J4.2 BLACK protected negative + NTC return
J4.3 WHITE NTC signal / BAT_NTC

Please return a controlled part/drawing, complete-pack limits, NTC construction, safety documents, MOQ and lead time.
The reference EEMB LP503030-PCM-LD sheet limits its PCM to 350 mA continuous. It is NOT approved for this request.
If these limits cannot be met, propose a supported alternative. This enquiry is not an order or a manufacturing release.
No end-user soldering. Lead length, routing, strain relief, sensor lag and physical qualification are still open.