

COLLAR TRACKER / CURRENT ASSEMBLY STUDY

Conditional geometry. Pack supplier response, factory assembly and physical validation remain open.

r16 / contact bearing plates and internal pockets

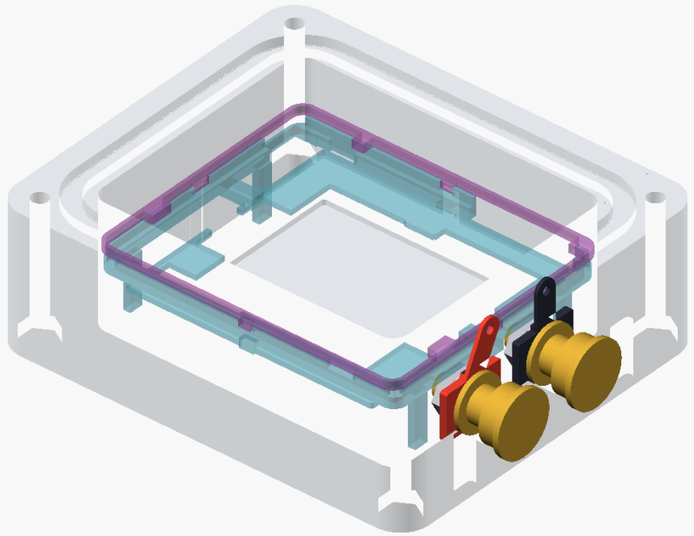

r15 dry dock with separate wire clamp

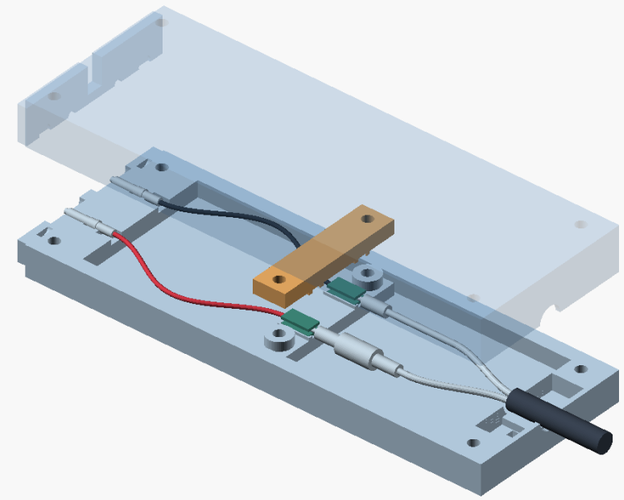

CURRENT MODEL

Rigid shell + lid: 57.4 x 49.4 x 21.0mm.

Body including external key: 61.4mm in X.

Boot: 60.4 x 52.4 x 25.8mm.

r12 carrier/cap; r11 lid, frame, boot and seals.

r16 shell/contacts; r15 dock: 101.5 x 36 x 16mm.

Constant-length pigtails; continuous radius >=8.696mm.

Separate padded clamp and factory forming fixture.

LIMITS / DO NOT ORDER AS A FINISHED DEVICE

Requested pack: 32 x 30.5 x 5.3mm maximum.

That pack envelope is not supplier approved.

Free-wire geometry does not constrain real buckling.

Contact holding, clamp pull and cycle tests remain open.

Charging is a dry indoor prototype only.

IP68 is a target, not a certified or measured result.

2m fresh water / 60min is an engineering assumption.

Parts in this review are explicitly revision-mapped; previous releases remain preserved.

Open the repository STATUS / RESUME for the exact source, commands and remaining work.