

CT-CONTACT-RET-001-A / REAR CONTACT RETENTION

Geometric prototype. Internal wire routing, factory process and physical qualification remain open.

r16 / unchanged outside size; new dry-side bearing pockets

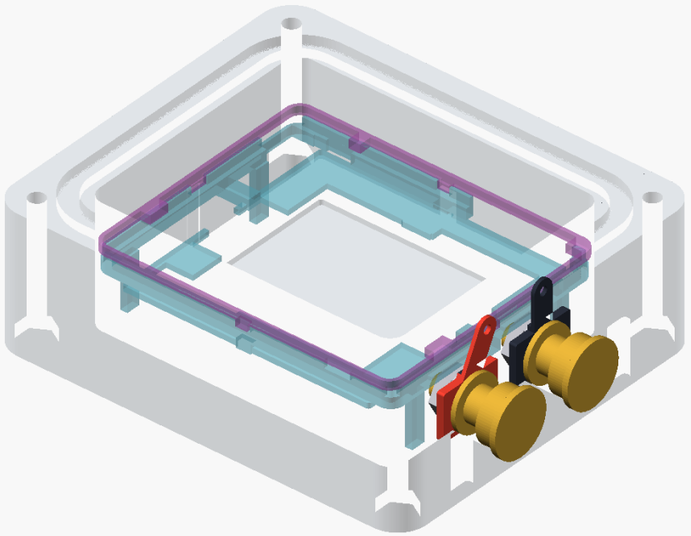

r16 / custom terminals, washer and M3 thin nut

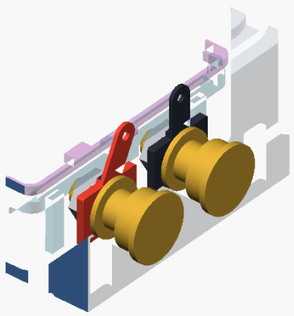

CHANGED / DIMENSIONS IN mm

Bearing faces: case X=22.60 +/-0.05.

Contact stem: 5.90 +/-0.05; M3 x 0.5 thread: 4.80.

Terminal base: 9.0 wide; Z=2.35 to 8.65; 1.0 thick.

Tail: 0.50 thick above Z=9.25; 1.20 wire hole.

Positive tail: Y=-3.30, Z=13.30; red to J3.1.

Ground tail: Y=+6.00, Z=13.30; black to J3.2.

Washer HRDW-M3-A2 / nut HFN-M3-A2 candidates.

CHECKED / NOT A FINISHED CHARGING PATH

Old 6.4mm circular stack is smaller than the bore.

New plate bears on both sides of the 7.34mm bore.

Minimum calculated ear bearing: 4.413mm2 each.

All 85 swept populated envelopes clear new metal.

Minimum component gap: 2.146mm at C10.

Head, seal glands and dock contact locations retained.

PCB/Gerber unchanged: both actual JLC runs 0/0/455.

Custom machined terminals; use contact.json and contacts.scad. Not a purchased Keystone lug or a plastic printed part.

Torque, pull, resistance, plating, creep and water/dust tests remain open. No supplier enquiry or order was sent.