
CT-DOCK-001-C | Wire clamp and assembly fixture / r15


PROTOTYPE — geometry checked; clamp retention, dock holding and electrical release remain open

External dry dock: 101.5 x 36 x 16mm

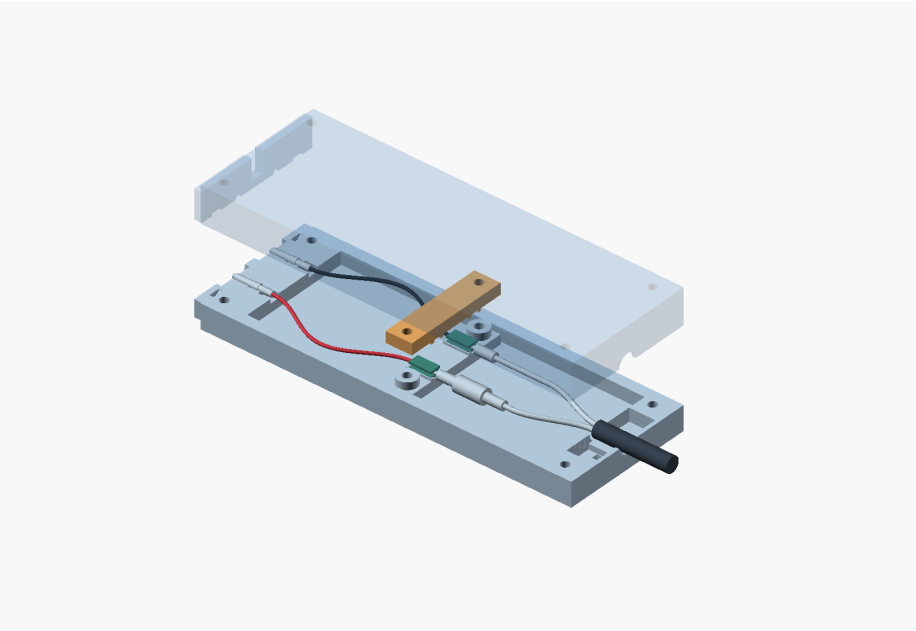

Wearable, PCB, key, seals and spring-contact seats unchanged.

Clamp assembly (cap lifted for visibility)

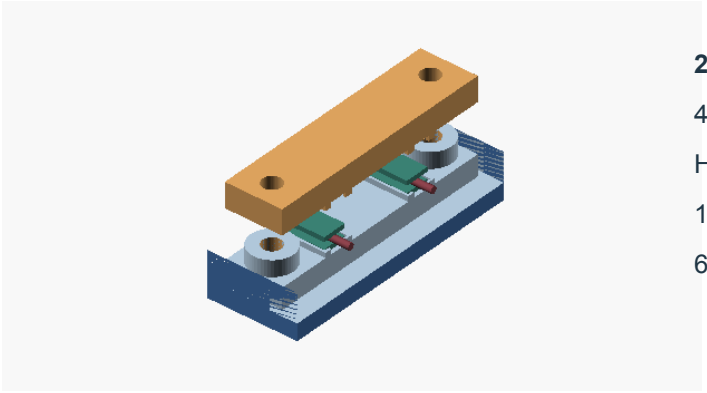

2 x M2 x 10


4 silicone pads

Hard-stop columns

1.93mm face gap

6 x 3mm pad outline

Separate factory forming fixture

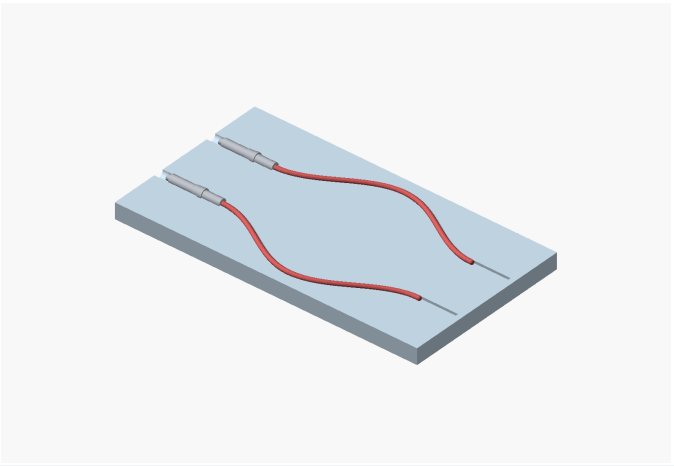

Free span / wire	40.95 +/- 0.10mm at 23C
Fixed-end plane	X=49.00 +/- 0.10mm total
Sheet thickness	0.7874 +/- 0.1016mm
Local pad displacement	5.50..43.52% / assigned bounds
Housing / cap / fixture	Four closed CAD meshes
CAD collision checks	5 clear / 3 contacts / 5 controls
PCB DFM	Unchanged: two runs at 0/0/455

The fixture controls assembly shape only. Free wires still require cycle tests.

Squeeze is not a friction, insulation-strain or lifetime calculation.

Factory pull target: 5N / 60s per wire; no physical result exists.

Position error and later slip share the same +/- 0.10mm budget.

Open: latch, internal J3 route, pack approval, firmware and physical power/RF/water/dust testing. No order release.