

COLLAR TRACKER / r05k PCB REVIEW

Two clean PCB DFM reports. Working-device release remains on hold.

TOP / copper and silkscreen

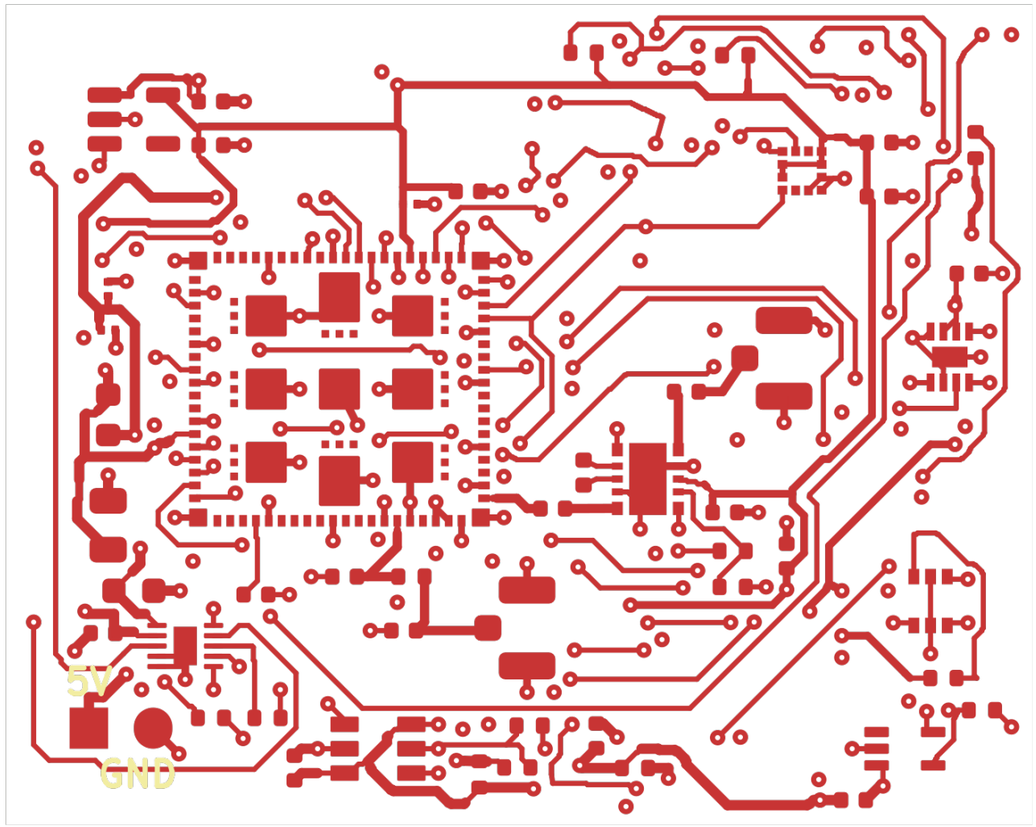

BOTTOM / mirrored component view

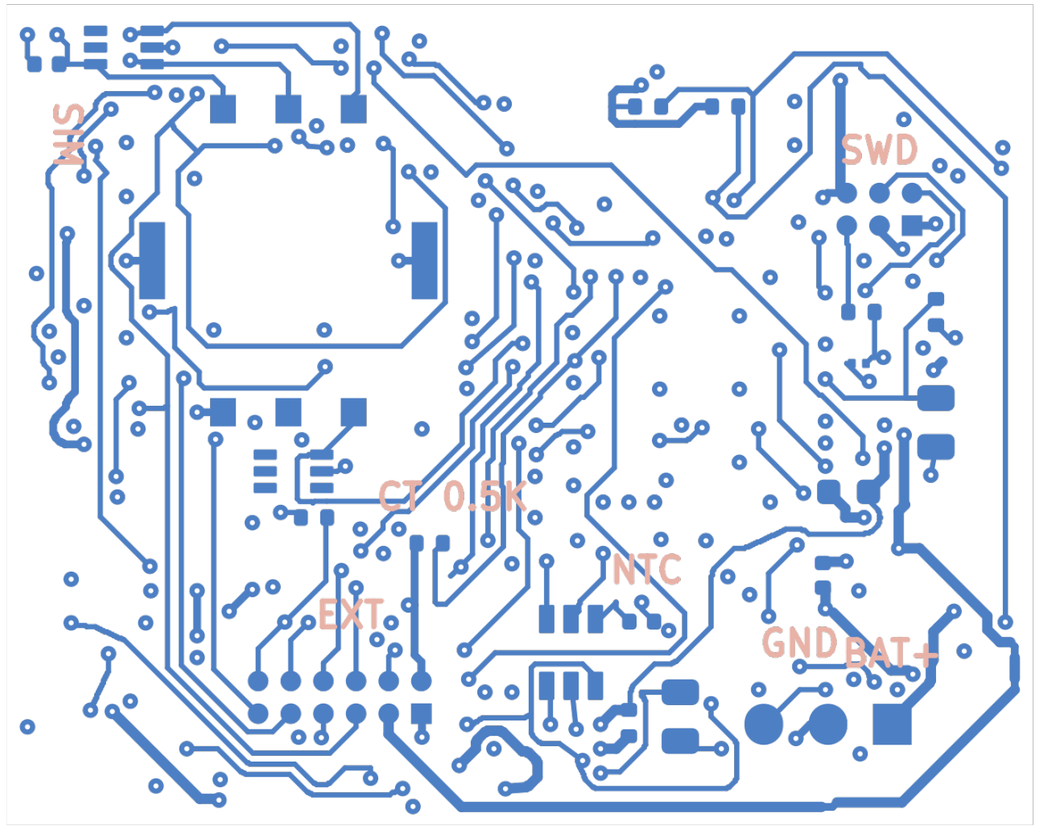

VERIFIED PCB

40 × 32 mm / six Cu layers / 71 footprints

Native DRC, ERC, connectivity and parity: zero findings

JLC: 0 Danger / 0 Warning / 450 Good in both runs

Same ZIP, same rules, all 29 rows analyzed; SMT off

65 fitted references / 38 exact candidate MPNs

BOM, CPL, native KiCad and both reports included

Two GND planes; inherited local return checks pass

REQUIRED BEFORE WORKING DELIVERY

Charging: direct 10k/B3435 NTC permits 50°C charging.

Reviewed pack maximum: 45°C. /CE is tied to GND.

A cell-temperature charge interlock is not implemented.

Protected pack, antennas, harness and retention: open.

Firmware, factory programming and powered tests: open.

Swimming/IP68: target only; no physical ingress test.

This is a PCB review package, not an order release.

PCB SHA256: bea6c52a7f045b5fb21ac9714f3db0c70207f150aab3e9587b891f08e4e2b4d3

JLC records: 637356580811132930 / 637356797304328193 | 2026-10-25