STK-SEP 2000

EX-PROOF ROBOT TRACK MOTION



Admex STK-SEP-2000 Ex-Proof robot track motion, with its standard equipment and options, has been specially developed for all dirty environment applications such as sand blasting, machining, laser cutting, flammable and explosive environments also especially painting applications.

Admex STK track motion have proven their quality and reliability for many years in many countries in many fields such as defense industry, aircraft industry, paper pulp production, machine production industry. STK-SEP series fully enclosed trackmotion with Ex-proof equipment is offered to our customers for flammable explosive applications.

Produced by Admex with 100% robotic production methods and designed with “Admex Advanced Meshed Body Structure”, STK-SEP offers serious advantages over its competitors with its robust body structure, sensitivity, speed and compact structure.

Thanks to the additional options that can be added according to the type of application and the needs of the customer, the requirements of the project can be fulfilled.


STK-SEP trackmotion track offers height adjustment at 1m intervals in the direction of movement, as well as height from the ground at 250mm intervals and robot position adjustment in Y direction at 250mm intervals. (Intermediate special dimensions are also possible) Therefore, it offers freedom of dimensioning in X, Y, Z directions according to project requirements.

We offer Admex’s proven quality and reliability in 4 continents and nearly 30 countries with STK-SEP series.


Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.

- Ex zone 1, Class 1 Div 1
- Suitable for all paint robots with a dynamic robot load of 1000kg. 1000kg moving external load carrying possibility. Unbeatable with a total load capacity of 2000kg.
- Ultra-rigid and light body structure thanks to Admex special “Advance Mesh Structure”.
- Best in class with 0.01mm repeatability.
- Track length can be chosen as desired in 1 meter steps, with a pillar every 4 meters.
- Internal pressurized air distribution system for positive pressure inside the track.
- Ultra-accurate and fast zeroing.
- Optionally automatic zeroing (Depend to robot brand)
- Possibility of adjustment of ±200mm between the cabin wall and the trolley connection surface.
- Limit switch, home switch and zone switch options

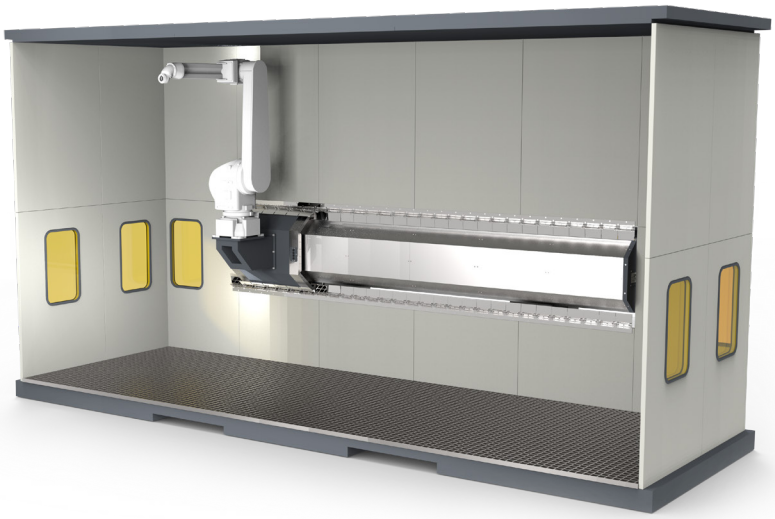

Technical Data		Only Robot (Including Tool & Workpiece)	Only Robot (Including Tool & Workpiece)
Max. Payload	*per carriage) kg*	1.000	2.000
Max. Speed	*m/min*	150	120
Max Acceleration	*m/s2*	3	2
Available Stroke	*travel length*	From 4 m, in 1 m steps	
Total Length	*m*	Stroke + 1.3 m	Stroke + 1.3 m
Robot Payload	*kg*	60-150	
Max. Robot Weight*	*kg*	1.000	
***Includes tool, workpiece, options**			
Mounting Position		Wall, Ceiling, Elevated	Wall, Ceiling, Elevated
Temperature		0-40 C deg	
Deflection of rail	*mm*	< 1mm	< 1mm
IP Protection	*IP 67 as standart*	Ex zone 1 , Class 1 , Div 1	
Repeatability	mm	± 0,01	± 0,01
Life	**million meter**	10	10

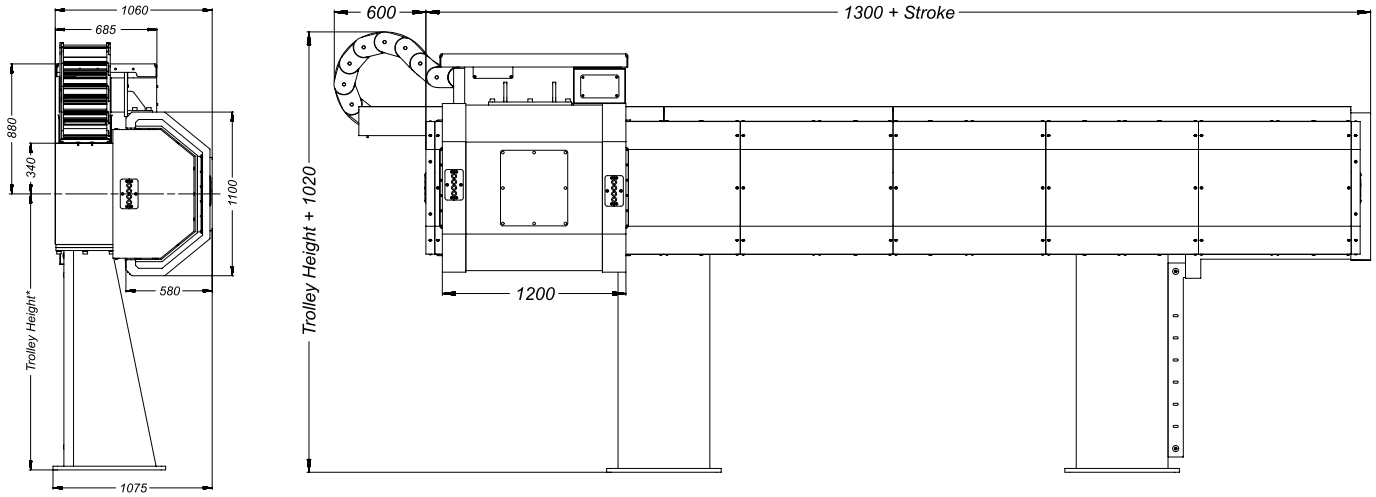

*Adjustable length according to robot mounting height


Technical data is subject to change without prior notice.


© 2023 ADMEX. All rights reserved.




Fully enclosed, design proprietary structure


Easy-to-clean stainless steel outer covers



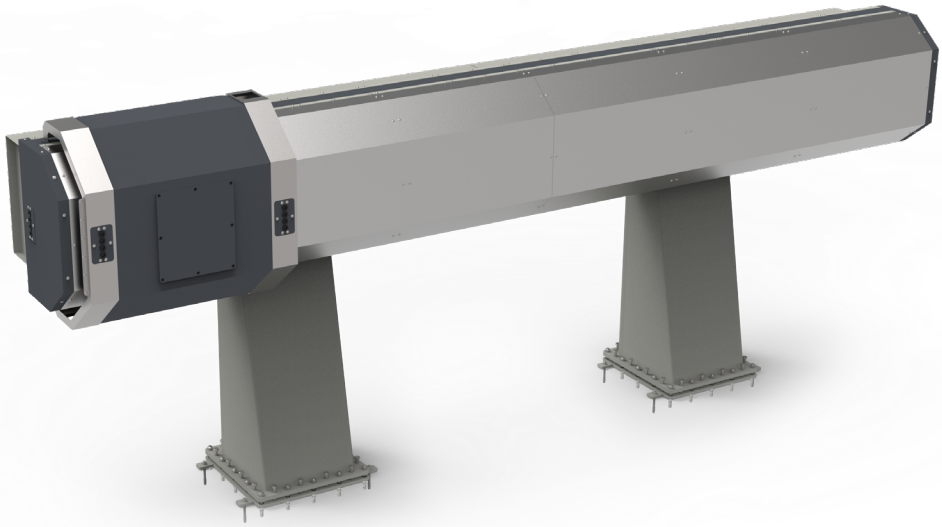

Stainless steel closed type cable transit units




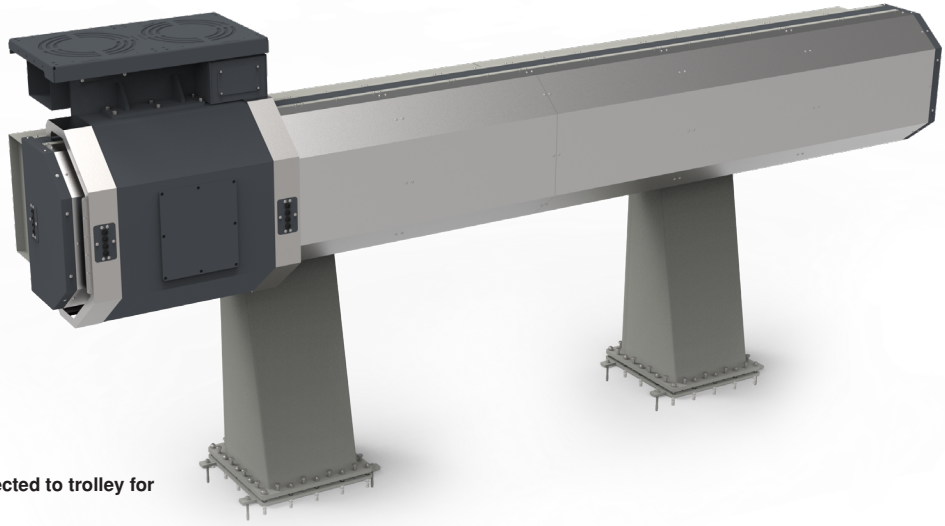


Equipment carrying unit connected to trolley for 1000 kg, 2000 kg, and CBS

Technical data is subject to change without prior notice.


© 2023 ADMEX. All rights reserved.

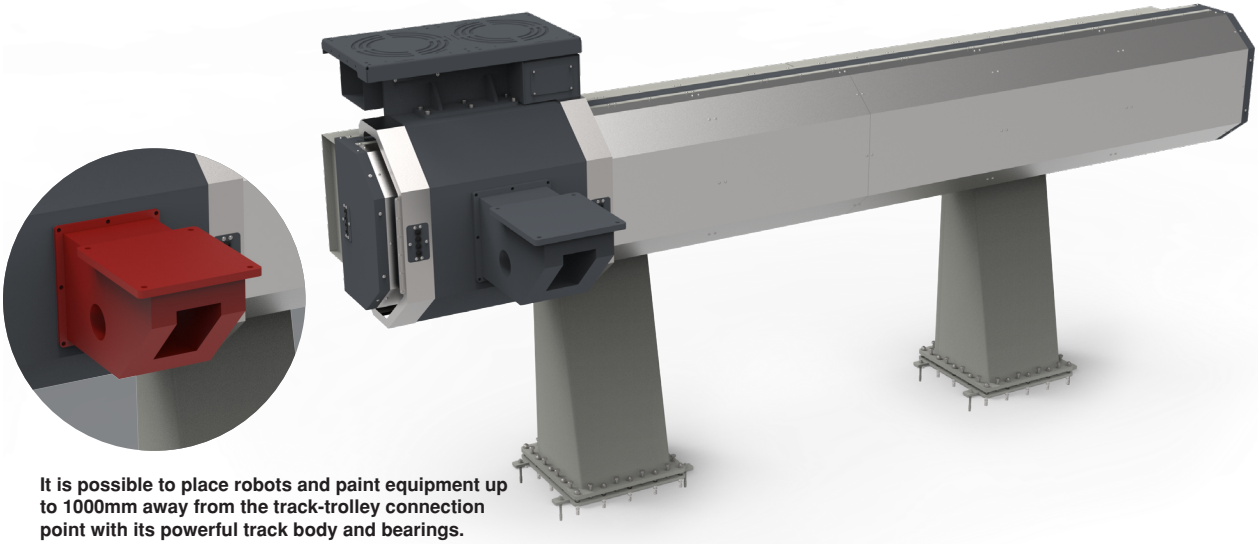

It is possible to place robots and paint equipment up to 1000mm away from the track-trolley connection point with its powerful track body and bearings.

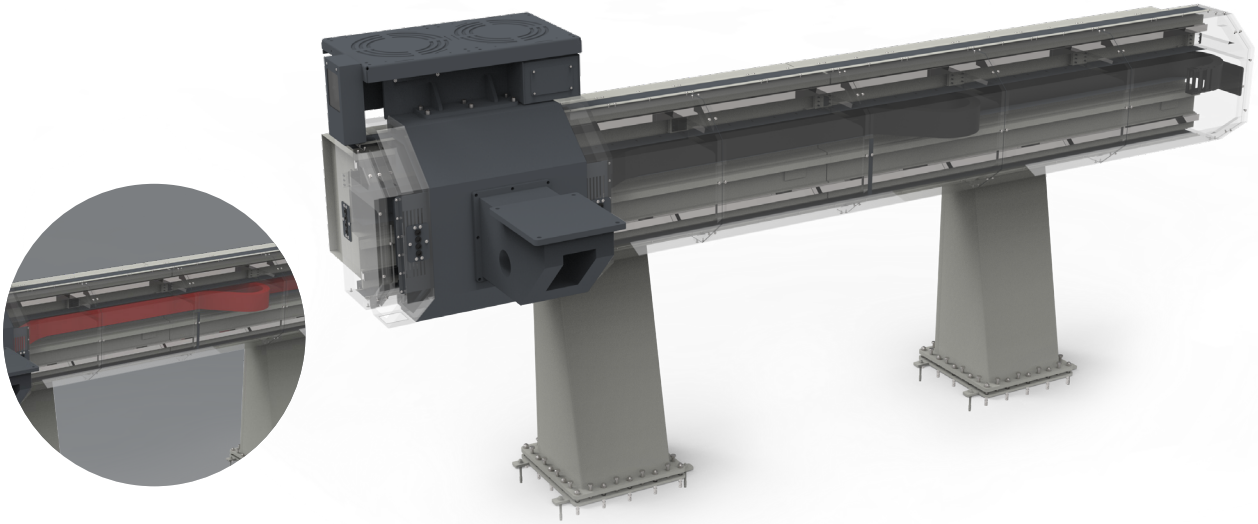

The cable drag chain is located inside the track and completely isolated from the outside environment.

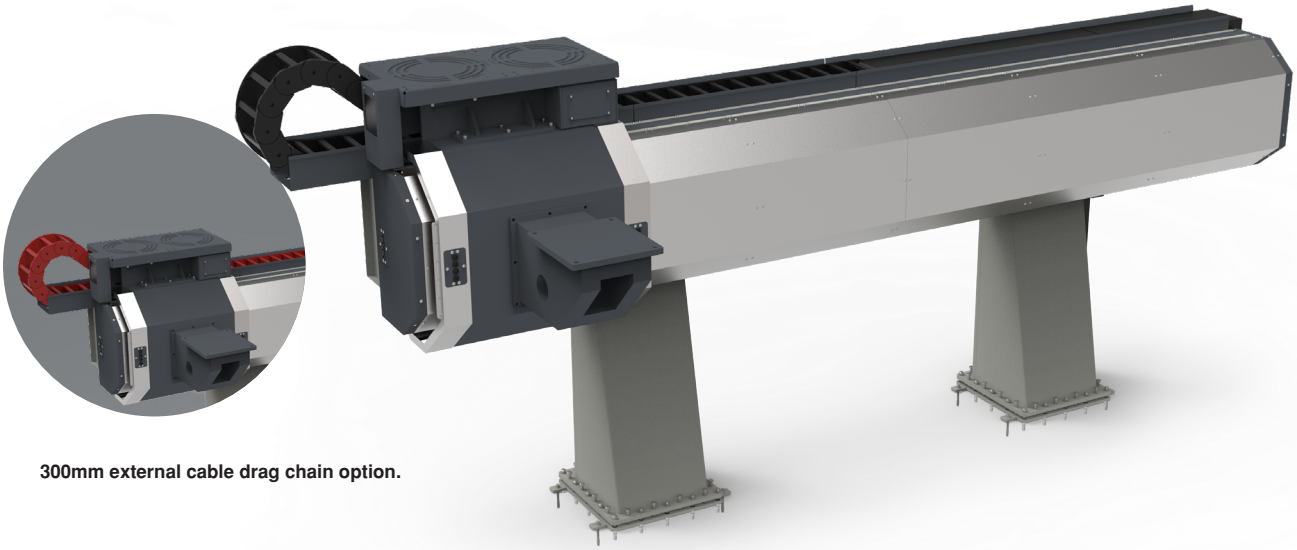

300mm external cable drag chain option.


Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.




Side stript brushes that isolate the inside of the track from the outside environment.







Self-opening and closing flip covers at the entrance to the paint booth. The track is mechanically separated from the paint booth with these covers.

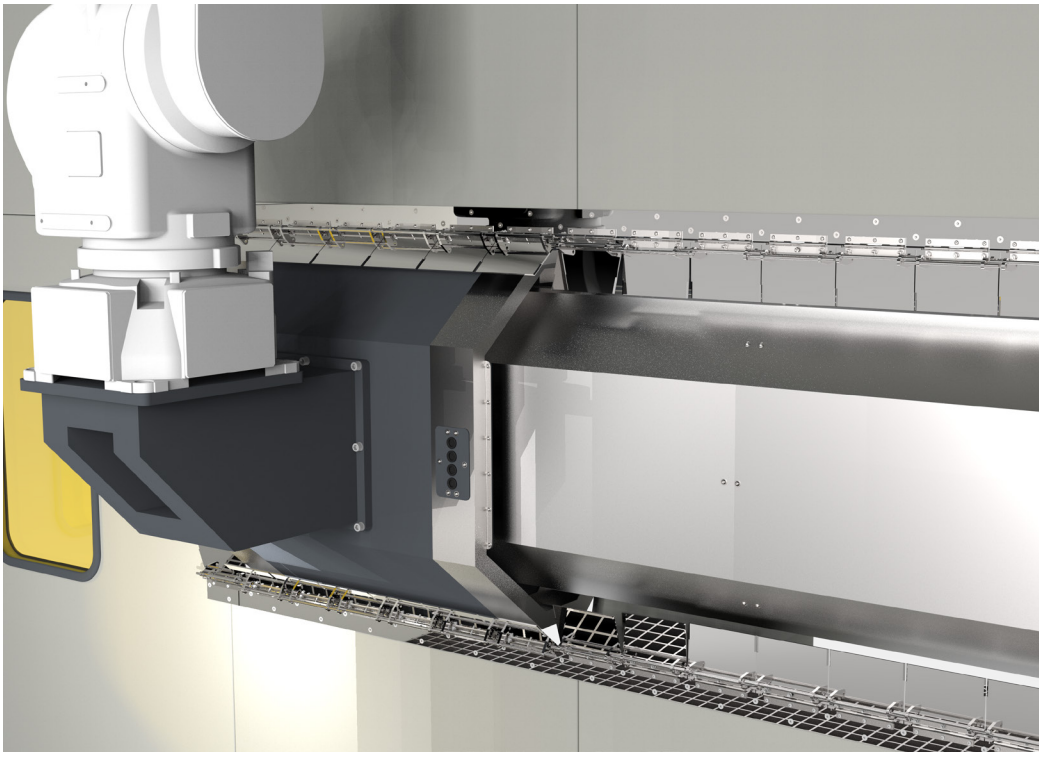


Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.

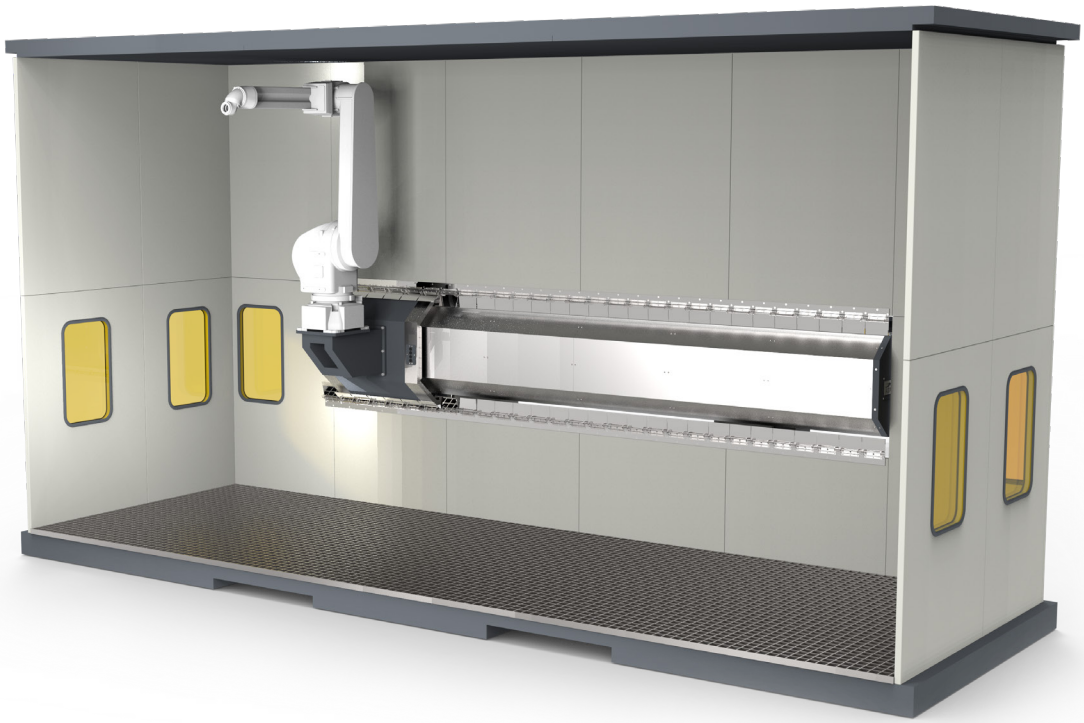



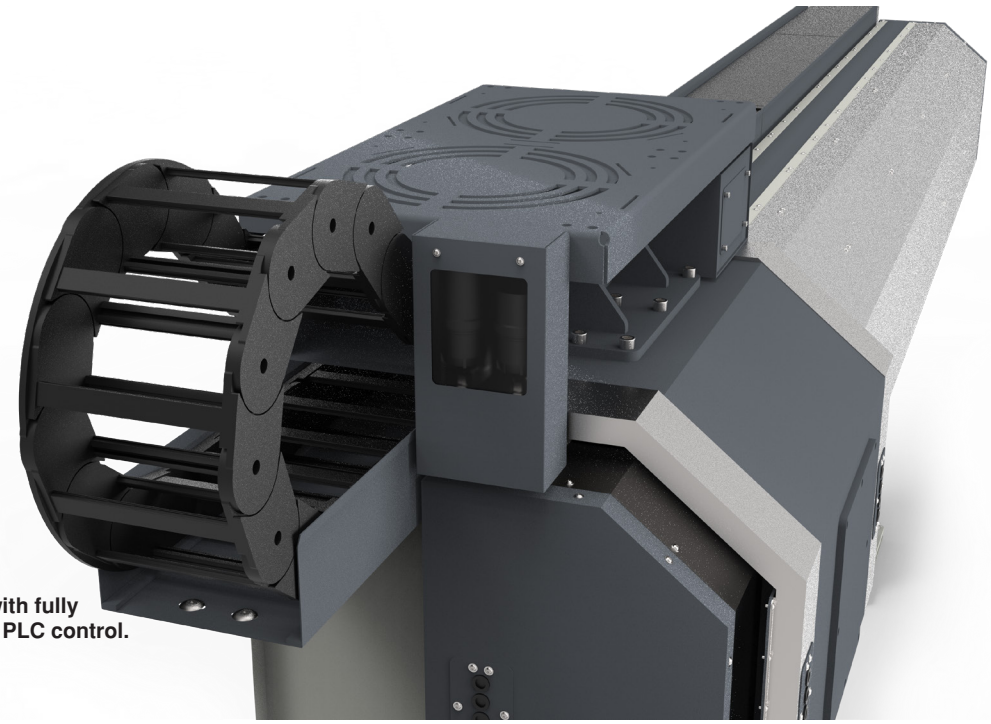


Central lubrication system with fully automatic double pump and PLC control.


Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.

Drive unit hidden under trolley, preventing stroke losses

Possibility to move the robot and trolley manually by easily separating the drive unit from the trolley.

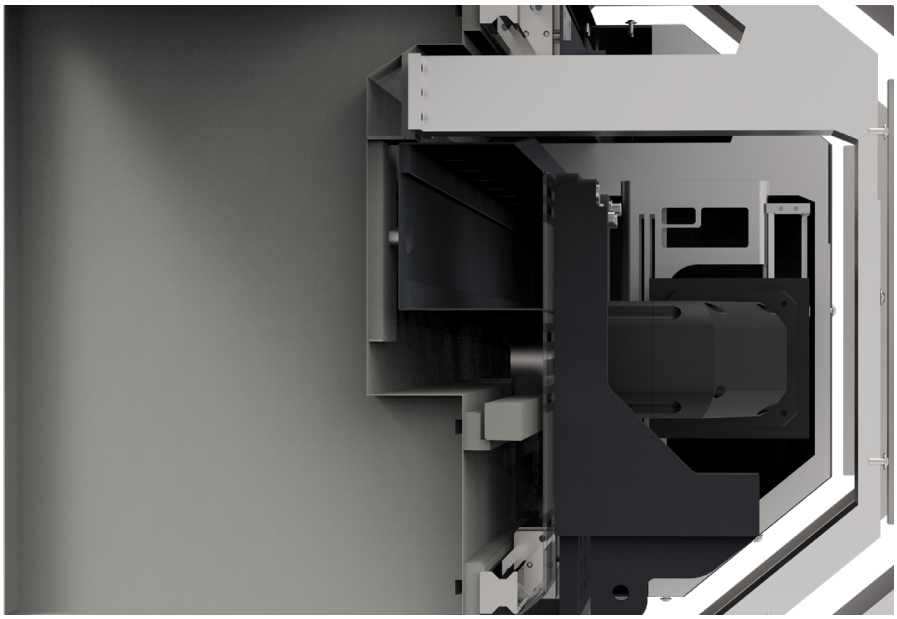

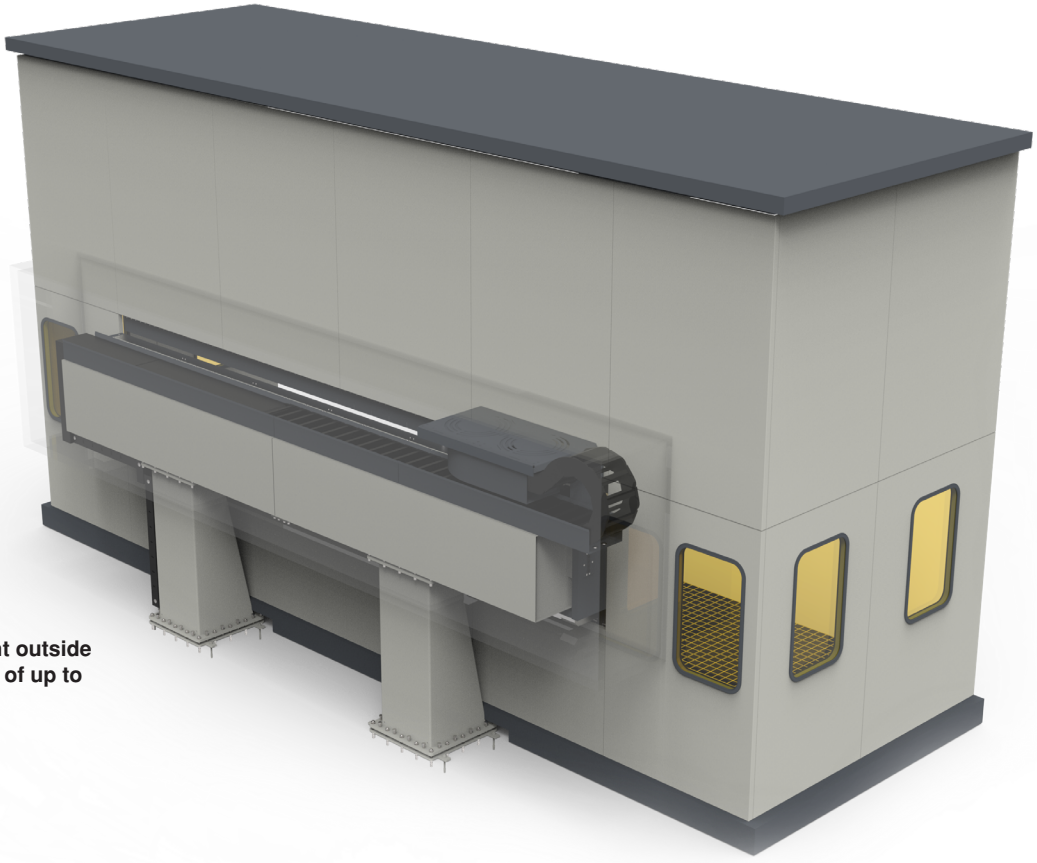


Minimum space requirement outside the booth. It can fit in a gap of up to 700mm.

Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.

Fixed stainless steel sheet metal cover option. Fixed-angle stainless steel sheet metals separate the paint booth and track area.

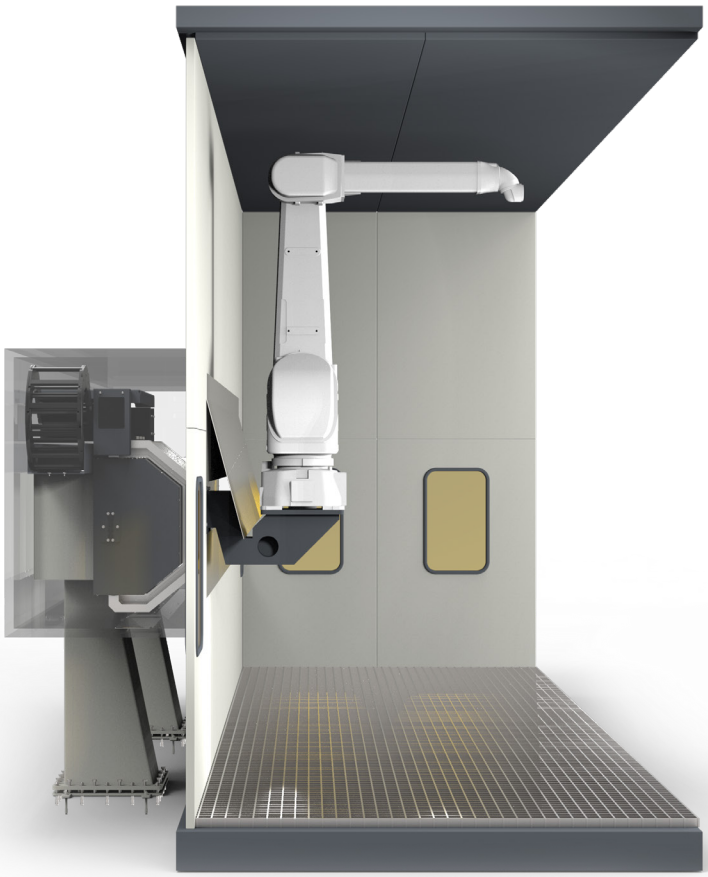



Technical data is subject to change without prior notice.

© 2023 ADMEX. All rights reserved.