
HP 7550A Color Desktop Plotter



Technical Data

High-performance plotter with automatic sheet feed

Features

- Extremely fast
- Automatic sheet feed
- Convenient operation
- Complete pen/media support
- High-quality output
- Hardware and software compatibility
- Programming features

HP's automatic sheet-feed 7550A plotter handles heavy graphics workloads from high-volume individual users or multi-user departments. From professional-looking graphs for presentations and reports to working and final-quality drawings for drafting and design systems, the HP 7550A color

desktop plotter provides fast, A4/A- and A3/B-size color graphics for both business and technical applications.

Extremely Fast

The HP 7550A's unsurpassed 6 g acceleration and fast pen speed mean shorter plotting time. The HP 7550A draws in any direction at 80.0 cm/s (31.5 in./s) and letters at approximately 8-10 characters per second depending on character size.


Convenient Operation

With automatic sheet-feed capability for both regular paper and overhead trans-

parency film, the HP 7550A is ideal for unattended plotting or multiple color copies. Just load the supply tray and the HP 7550A will plot out 150 regular paper graphics or 100 presentation overheads.

The eight-pen carousel allows a variety of pen colors and tip widths to be loaded at one time, and the plotter caps the pens to keep the ink fresh. The HP 7550A color desktop plotter automatically senses the carousel type loaded, and sets the optimal pen force and speed automatically. The plotter also senses the paper size and sets the plot margins accordingly.

Configuring the plotter, changing plotting area, rotating drawings 90 degrees, and aligning graphs to preprinted forms and grids can all be done from the front panel. The liquid-crystal display also reports plotter status and gives program messages.

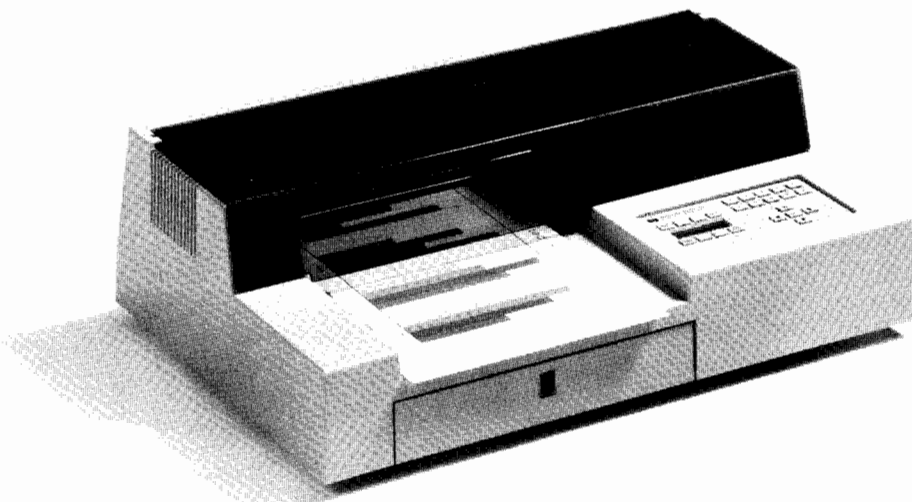

Complete Media Support

HP 7550A users can select from A3/B- and A4/A-size paper (regular and glossy), double-matte polyester film, and vellum, as well as A4/A-size transparency film. Pen choices include liquid-ink (refillable and disposable), roller-ball, and paper and transparency fiber-tip.

High-quality Output

With an addressable resolution of 0.025 mm (0.001 in.) and mechanical resolution of 0.006 mm (0.00025 in.), the HP 7550A color desktop plotter produces smooth curves and straight lines. Its precise repeatability means that beginning and end points of a figure will match to within 0.1 mm (0.004 in.), so edges align and filled areas are even. The HP 7550A's curved line generator creates exceptionally smooth curves.

Hardware and Software Compatibility

The HP 7550A has one HP-IB (IEEE 488-1978) and two RS-232-C/CCITT V.24 connectors on the back panel, so it is compatible with most computers. The HP 7550A can even be connected in series between the computer and terminal, saving a computer port.

In addition to a wide variety of personal application and multi-user software, the HP 7550A color desktop plotter is supported on many local area network systems.

Advanced Intelligence

The HP 7550A is also equipped with Hewlett-Packard Graphics Language (HP-GL), a powerful instruction set that helps simplify programming. These simple instructions permit a variety of operations like drawing arcs and circles, filling polygons, selecting pen velocity, and labeling.

Technical Information

Media Sizes

210 × 297 mm (ISO A4);

8½ × 11 in. (ANSI A)

297 × 420 mm (ISO A3);

11 × 17 in. (ANSI B)

Pens

Number: 8

Type: Liquid-ink (refillable and disposable), roller-ball, fiber-tip (paper and transparency)

Media

Paper (regular and glossy), transparency film, vellum, double-matte polyester film (automatic sheet feed for regular paper and transparency film only)

Character Sets

(Each in two fonts) French/German, HP 9825, Scandinavian, Spanish/Latin American, Roman Extensions, Special Symbols, and these ISO registered sets: ANSI ASCII (006), French (025), German (021), International Reference Version (002), Italian (015), JIS ASCII (014), Katakana (013), Norwegian I (060), Norwegian II (016), Portuguese (016), Spanish (017), Swedish (010), Swedish for Names (011), United Kingdom (004)

Resolution

Addressable: 0.025 mm (0.001 in.)

Mechanical: 0.00625 mm (0.00025 in.)

Repeatability

With a given pen: 0.1 mm (0.004 in.)

Pen Velocity

Maximum: 80.0 cm/s (31.5 in./s)

Acceleration

Maximum: Approximately 6 g

Pen Force

From the program or front panel: -15 to 66 grams

Maximum Plotting Area

Pen axis: 254.0 mm (9.97 in.) for A/B; 272.0 mm (10.65 in.) for A4/A3

Paper axis: 196.0 mm (7.68 in.) for A; 190.0 mm (7.45 in.) for A4; 411.0 mm (16.12 in.) for B; 399.0 mm (15.65 in.) for A3

Buffer Size

Default 1024 bytes; from the program, expandable to 12 Kbytes

Environmental Ranges

Temperature and Humidity

Operating: 0 to 55 degrees C (32 to 131 degrees F)

Storage: -40 to 75 degrees C (-40 to 167 degrees F)

Operating with automatic sheet feed (transparency): 15 to 35 degrees C; 25 to 75% RH

Power Requirements

Source: 100, 120, 200, 240 V,
-10%, +5%

Frequency: 48-66 Hz

Consumption: 100 W maximum

Physical Specifications

Height: 215.0 mm (8.5 in.)

Width: 670.0 mm (26.4 in.)

Depth: A4/A loading tray/no
catcher, 432.0 mm (17.0 in.);
A4/A loading tray A4/A catcher,
682.0 mm (26.8 in.);
A3/B loading tray/no catcher,
635.0 mm (25.0 in.);
A3/B loading tray/A3/B catcher,
896.0 mm (35.3 in.)

Net weight: approx. 17.3 kg
(38.0 lb)

Shipping weight: approx.
25.0 kg (55.0 lb)

Product Certifications

FCC certified to conform to
limits set for radio frequency
when used with a Class B com-
puting device; meets or exceeds
IEC-380, IEC-435, UL-478, and
CSA C22.2 No. 154.

Interface and Cable Requirements

System	Cable
HP Vectra PC with HP 24540A/B serial/parallel interface card or HP 24541A/B dual serial interface card using 9-pin connector	HP 24542H
HP Vectra PC with HP 24541A/B dual serial interface card using 25-pin connector	HP 17255D
HP Touchscreen PC using serial interface	HP 17255D
HP Touchscreen PC using HP-IB interface	HP 10833A (1.0 m) HP 10833B (2.0 m) HP 10833C (3.0 m) HP 10833D (0.5 m)
IBM PS/2, PC, PC-XT, and compatibles	HP 17255F
IBM AT and compatibles	HP 24542H
Apple Macintosh 128K and 512K	HP 92219M and HP 92224F
Apple Macintosh SE, Macintosh Plus and Macintosh II	HP 17302A and HP 92224F
Apple IIe	HP 17355D

Ordering Information

Standard Unit

7550A

Color desktop plotter

Note: Interface cables must be
ordered separately

Accessories Included

Operation and Interconnection
Manual (language appropriate
to plotter destination)

Pocket Guide

Power cord (appropriate to
plotter destination)

Plotter paper—50 sheets, A4/A
size (paper sizes determined by
plotter destination)

Transparency film—sampler,
A4/A size (film size determined
by plotter destination)

Carousel for fiber-tip paper
pens

Carousel for fiber-tip trans-
parency pens

Assorted fiber-tip paper and
transparency pens

Automatic sheet-feed
equipment—A4/A-size media
loading tray; A4/A-size paper
catcher (size determined by
plotter destination)

HP Plotter Supplies Catalog

Accessories Available

07550-90000	Hardware Support Manual
07550-90001	Interfacing and Programming Manual
07550-60050	Additional fiber-tip transparency pen carousel
07550-60051	Additional fiber-tip paper pen carousel
07550-60052	Roller-ball pen carousel
07550-60053	Liquid-ink drafting pen carousel
17525A	Automatic sheet-feed kit for 11 × 17 in. media (B size), includes loading tray, paper catcher, and 50 sheets of 11 × 17 in. paper
17526A	Automatic sheet-feed kit for 297 × 420 mm media (A3 size), in- cludes loading tray, paper catcher, and 50 sheets of 297 × 420 mm paper

For a complete list of available
supplies, check the current ver-
sion of the HP Plotter Supplies
Catalog or the Hewlett-Packard
PC Peripherals Price Guide.

United States:

Hewlett-Packard Company
4 Choke Cherry Road
Rockville, MD 20850
301 670 4300

Hewlett-Packard Company
5201 Tollview Drive
Rolling Meadows, IL 60008
312 255 9800

Hewlett-Packard Company
5161 Lankershim Blvd.
No. Hollywood, CA 91601
818 505 5600

Hewlett Packard Company
2015 South Park Place
Atlanta, GA 30339
404 955 1500

Canada:

Hewlett-Packard Ltd.
6877 Goreway Drive
Mississauga, Ontario L4V1M8
416 678 9430

Australia/New Zealand:

Hewlett-Packard Australia Ltd.
31-41 Joseph Street
Blackburn, Victoria 3130
Melbourne, Australia
03 895 2895

Europe/Africa/Middle East:

Hewlett-Packard S.A.
Central Mailing Department
P.O. Box 529
1180 AM Amstelveen
The Netherlands
31 20/547 9999

Far East:

Hewlett-Packard Asia Ltd.
22/F Bond Centre
West Tower
89 Queensway
Central, Hong Kong
5 848 7777

Japan:

Yokogawa Hewlett-Packard Ltd.
29-21, Takaido-Higashi 3-chome
Suginami-ku, Tokyo 168
03 331 6111

Latin America:

Latin American Region Headquarters
Monte Pelvoux Nbr. 111
Lomas de Chapultepec
11000 Mexico D.F., Mexico
905 596 79 33

Technical information in this document
is subject to change without notice.

Copyright © 1989
Hewlett-Packard Company

Printed in USA 2/89
5954-7084