Gold Fame Technology Limited

SPECIFICATION

GOLD FAME MODEL NO. : GF-M40XGF20416-02

CUSTOMER NAME : _____

CUSTOMER MODEL NO. : _____

DOC VERSION : V1.0

SAMPLE DATE : _____

CUSTOMER APPROVAL FOR SAMPLE & MASS PRODUCTION:
APPROVED BY: _____
DATE: _____

INTERNAL APPROVAL:		
WRITTEN BY	CHECKED BY	APPROVED BY
Shilin Li	Jincai Yang	Fei Liu

©All Rights Reserved

Revision record

VEV NO.	REV DATE	CONTENTS	Note
V1.0	2025/9/15	Preliminary Specification was first released	

©All Rights Reserved

Table Of Contents

List	Description	Page No.
	Cover	
	Revision Record	1
	Table Of Contents	2
1	General Information	3
2	External Dimensions	4
3	FPC Part list & Structure	6
4	Absolute Maximum Ratings	9
5	Electrical Characteristics	9
6	Backlight Characteristics	10
7	Optical Characteristics	10
8	Timing Characteristics	12
9	Reliability Test Conditions And Methods	14
10	Handling Precautions	15
11	Precaution For Use	17
12	Packing method	17
13	Inspection standards	18
14	Contact	21

©All Rights Reserved

1. General Information

The GF-20416 5-inch RGBW TFT LCD from Gold Fame Technology is designed for outdoor applications requiring sunlight readability and low power consumption. By adding a white sub-pixel to the traditional RGB structure, the display achieves up to 50–80% higher brightness or 38.6% power savings under comparable conditions. The white sub-pixel can also be independently controlled through software, enabling it to be switched off in low-light environments to function as a traditional RGB display with improved contrast.

With a resolution of 800(RGBW) x 480, a typical brightness of 1200 cd/m², and an operating temperature range of -30°C to 80°C, the GF-20416 delivers reliable performance in demanding outdoor environments. Additional features such as an EMI-shielded FPC and optional capacitive touch with Atmel-mxT288UD-AMB controller make this display well-suited for rugged embedded applications.

NO	Item	Contents	Unit
(1)	Screen size	5.0	inch
(2)	LCD type	TFT	-
(3)	Display resolution	800(H)×(RGBW)×480(V)	dot
(4)	Driver IC	FL58202DA	-
(5)	Viewing direction	ALL	-
(6)	Pixel Pitch(mm)	0.03375(H) ×0.135 (V)	mm
(7)	Module outsize（mm）	130(H)×84.70(W)×6.26(T)	mm
(8)	Lcd active aera（mm）	108(H)×64.80(V)	mm
(9)	Color configuration	RGBW Vertical Stripe	-
(10)	Display mode	Normally black	-
(11)	Weight	95	g
(12)	Touch IC	mxT288UD-AMB	-
(13)	LENS	AGC	-
(14)	Interface Type	MIPI	-

2. External Dimensions

©All Rights Reserved

All Pages Of This Edition Approved			
Signature:		Date:	

二级保密

REV.	DESCRIPTION	REVISER	DATE
A0	New Drawing	Li Shilin	2025/09/15

LCM Interface definition

PIN	SYMBLE
1	VDD
2	VDD
3	RSTB
4	STBYB
5	VDD_OTP
6	SPI_CS
7	SPI_SCL
8	SPI_SDAI
9	SPI_SDAO
10	I2C_SCL
11	I2C_SDA
12	UD
13	LR
14	BIST
15	HW_CTRL
16	ROM_RLD
17	ERR
18	GND
19	D0N
20	D0P
21	GND
22	D1N
23	D1P
24	GND
25	DCLKN
26	DCLKP
27	GND
28	D2N
29	D2P
30	GND
31	D3N
32	D3P
33	GND
34	NC
35	LED_A
36	NC
37	LED_K
38	NC

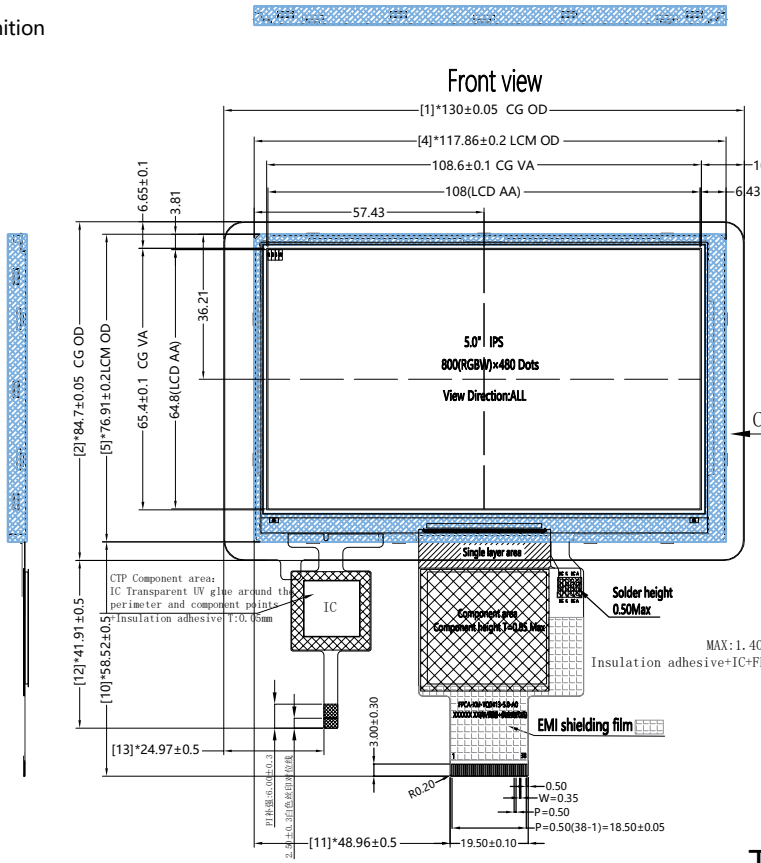

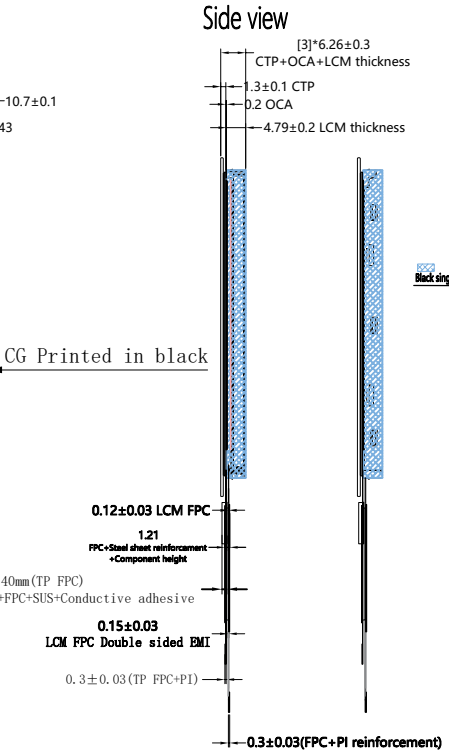

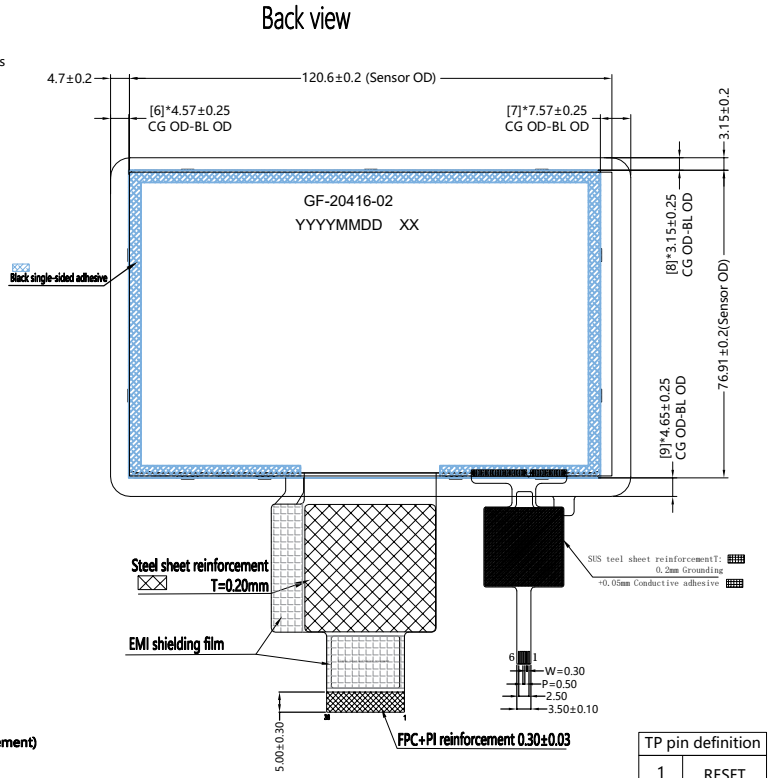

TP pin definition	
1	RESET
2	INT
3	SDA(3.3V)
4	SCL(3.3V)
5	GND
6	VDD(3.3V)

TP Stack structure

GG

COVER GLASS 0.7mm
SCA（抗UV）0.2mm
ITO GLASS 0.4mm

Property	Requirement
IC	mxT288UD-AMB
Glass Thickness	0.7mm AGC
ITO sensor	0.4mm
Surface Hardness	6H(750g)
Light Transmission	≥85%

LED The circuit principle diagram
(7*2=14 SMD)
IF=60 mA,Vf=18.9V~23.1V

NOTES:
1.DISPLAY TYPE: 5.0 TFT-LCD;
2.DISPLAY MODE:FFS (Normally BLACK);
3.Display resolution: 800(RGBW)×480
4.VIEWING DIRECTION: ALL
5.BACK LIGHT: 14 Chip-White LED, IF=60mA,VF: 18.9V~23.1V ;
6.LCM brightness: 1000cd/m^2(Min);1200cd/m^2(typ);
7.Color coordinates：X=0.300±0.04,Y=0.330±0.04
8.Brightness uniformity:75%(Min),80%(typ)。
9.Contrast ratio：1000:1 (Min),1500:1(typ)，NTSC:44%(Min), 49%(typ);
10.Warpage degree：0.40mm Max
11.Storage temperature：-40°C~85°C，Working temperature: -30°C~80°C ;
12.Key dimensions: " [ ]* " , Reference size:( ), No tolerance specified ±0.20;
13.Accord with RoHS2.0+HF+REACH+VOCs Environmental requirements;

GOLD FAME TECHNOLOGY LIMITED
高富科技有限公司

	UNITS: mm	DATE:	PART NUMBER :		SHEET:	1 of 4
DESIGN BY:	Li Shilin	2025/09/15	GF-M40XGF20416-02		DRAWING DESCRIPTION:	MODEL
CHECKED BY:						
APPROVED BY:			DO NOT SCALE THIS DRAWING.	PROJECTION		

3.1 FPC Part list & Structure

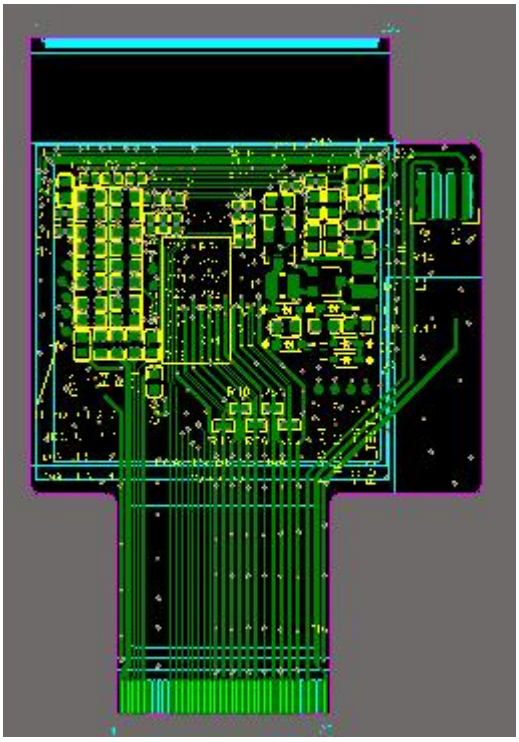

TOP

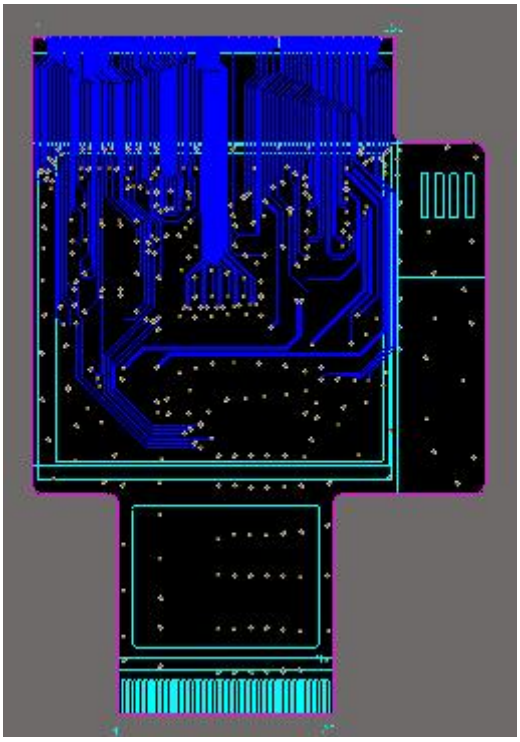

BOTTOM

Part List:

名称	规格	封装	位号	数量	备注
Capacitance	4.7UF/10V/0402	C0402	C1	1	
Capacitance	2.2UF/10V/0402	C0402	C2, C3, C4, C5, C6, (	7	
Capacitance	10UF/10V/0402	C0402	C8, C25	2	
Capacitance	10UF/16V/0603	C0603	C9, C12	2	
Capacitance	4.7UF/16V/0402	C0402	C10, C11	2	
Capacitance	1UF/25V/0603	C0603	C14, C15, C18, C19,	5	
Capacitance	2.2UF/25V/0603	C0603	C16, C17	2	
Capacitance	0.47UF/10V/0603	C0603	C21	1	
Capacitance	10UF/10V/0603	C0603	C22	1	
Capacitance	2.2UF/10V/0603	C0603	C26	1	
MOSFET-N	ZXMN2F30FH	SOT-23	D1	2	
MOSFET-P	DMP2123	SOT-23	D3	2	
TVS	B5819WS_SOD323	SOD-323_L1.7-W1.3	D2, D4, D5, D6, D7	5	
inductor	NR252012-4R7M	1008	L1, L2	2	
resistance	0R/0402	R0402	R1	1	
resistance	0R/0603	R0603	R2, R3, R4, R5, R13	5	
resistance	47K/0603	R0603	R6	1	
resistance	4.7K/0402/1%	R0402	R7	1	
resistance	10K/0402/1%	R0402	R10, R11,R40	3	
resistance	0.1R/0603/1%	r0603	R12, R14	2	
resistance	0R/0603/1%	R0603	R15	1	
resistance	4.7k/0603/1%	r0603	R18, R21, R23, R25	8	
resistance	100R/0402/NC	R0402	R48, R49, R50, R51	5	预留上锡不贴件
resistance	4.7k/0603/1%/NC	r0603	R19, R20, R22, R24	8	预留上锡不贴件
resistance	10K/0402/1%/NC	R0402	R41	1	预留上锡不贴件

©All Rights Reserved

3.2 LCM Interface Description

Pin No.	Symbol	Description
1	VDD	Power supply forIO system. Connect to a capacitor for stabilization.Please short VDDI, VDDI1, VDDRX and VDD PWR on the FPC/PCB
2	VDD	Power supply forIO system. Connect to a capacitor for stabilization.Please short VDDI, VDDI1, VDDRX and VDD PWR on the FPC/PCB
3	RSTB	Reset input pin H: Normal operation (Default) L: Reset state.
4	STBYB	Standby mode H: Normal operation (Default) L: Standby mode. TCON, source driver, power circuit will be turned off.
5	VDD_OTP	Power supply for build-in OTP programming. If it' s not used, please leave these pins open.
6	SPI_CS	Chip select signal for SPI interface. If12C SPI SEL=H, please let these pins open.
7	SPI_SCL	Clock signal for SPI interface. If12C SPI SEL=H, please let these pins open.
8	SPI_SDAI	Serial data input for SPI interface. If12C SPI SEL=H, please let these pins open,
9	SPI_SDAO	Serial data output for SPI interface.
10	I2C_SCL	Clock signal for I^2C interface. If I2C_SPI_SEL=L, please let these pins open.
11	I2C_SDA	Serial address and data input/output for I^2C interface. If I2C_SPI_SEL=L, please let these pins open. Note: A pull high resistance,4.7K~8K ohm, is needed for SDA pin when using I^2C interface.
12	UD	Gate driver Up or Down sequence control. H: Shift from up to down (Default) L: Shift from down to up
13	LR	Source driver Left or Right sequence control. H: Shift S[1]→S[2]→…→S[MS-1]→S[MS] (Default) L: Shift S[MS]→S[MS-1]→…→S[2]→S[1]
14	BIST	Built-in Self-Test function. H: Enable

All Rights Reserved

		L: Disable (Default)
15	HW_CTRL	Function pin control by hardware or software selection: H: Hardware pin (H/W > S/W) (Default) L: Software register (S/W > H/W)
16	ROM_RLD	OTP reload per 32 frames: H: Enable auto-reload OTP L: Disable auto-reload OTP (Default)
17	ERR	Output pin for error detection H: No error detected L : Function error detected
18	GND	Ground pin
19	D0N	That the COG resistance is less than 10 ohm.
20	D0P	MIPI DSI differential data pair.
21	GND	Ground pin
22	D1N	That the COG resistance is less than 10 ohm.
23	D1P	MIPI DSI differential data pair.
24	GND	Ground pin
25	DCLKN	That the COG resistance is less than 10 ohm.
26	DCLKP	MIPI DSI differential clock pair.
27	GND	Ground pin
28	D2N	That the COG resistance is less than 10 ohm.
29	D2P	MIPI DSI differential data pair.
30	GND	Ground pin
31	D3N	That the COG resistance is less than 10 ohm.
32	D3P	MIPI DSI differential data pair.
33	GND	Ground pin
34	NC	No Connected
35	LED_A	Backlight LED anode
36	NC	No Connected
37	LED_K	Backlight LED cathode
38	NC	No Connected

©All Rights Reserved

4. Absolute Maximum Ratings

Item	Symbol	Min	Max	Unit	Note
LC Operating Voltage	VOP	--	3.3	V	*1*2
Operating Temperature	Top	-35	80	℃	---
Storage Temperature	Tst	-40	85	℃	---
Operating Ambient Humidity	RH		90	%(RH)	*3
Storage Humidity	RH		90	%(RH)	*3

Note:

*1.At 25+5℃

*2. Due to the characteristics ofIC Material,
the iquid Crystal driving voltage varieswith environmental temperature.

*3.Non-condensation.

*4. Temp.≤ 60℃,90%RH Max.

Temp.> 60℃,Absolute humidity shal be less than 90%RH

5. Electrical Characteristics

Item	Symbol	Min	Typ	Max	Unit	Remarks
TFT Gate ON Voltage	VGH	17v	17v	18v	V	Note1
TFT Gate OFF Voltage	VGL	-15V	-12v	-12V	V	Note 2
TFT Common Electrode Voltage Vcom	Vcom	--	--	--	V	需每一片调试并烧录最佳 vcom
Interface Supply Voltage	IOVCC	1.7V	1.8V	1.8V	V	
Positive Voltage input	VSP	5.9V	6.5v	6.6V	V	
Negative Voltage input	VSN	-6.6V	-6.5V	-5.9V	V	

Note:

©All Rights Reserved

*1. VGH is TFT Gate operating Voltage.

*2. VGL is TFT Gate operating Voltage.

The storage structure of this model is CST (Storage on Common)

*3. Vcom must be adjusted to optimize display quality _Crosstalk, Contrast Ratio and etc.

6. Backlight Characteristics

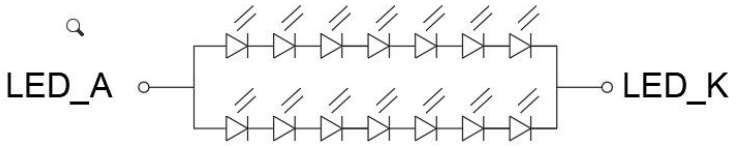

LED The circuit principle diagram

(7*2=14 SMD)

IF=60 mA,Vf=18.9V~23.1V

Item	Symbol	MIN	TYP	MAX	UNIT	Test Condition	Note
Supply Voltage	Vf	18.9	--	23.1	V	If=60mA	-
Supply Current	If	-	60	-	mA		-
Luminous Intensity for LCM	-	1000	1200	--	Cd/m^2		-
Uniformity for LCM	-	75	80	-	%		-
Number of LED	-		14	-	Piece		-
Backlight Color	White						

©All Rights Reserved

7. Optical Characteristics

Item of electro-optical characteristics	Symbol		Condition	Min	Typ	Max	Unit	Remark
Contrast ratio	CR		Ø=Ψ=o^2 Ta=25℃ I_f=60mA	1000	1500	--	-	
Response time	Tr+Tf			--		30	Ms	Note1
Viewing angle range	Ø (CR≥10)		Up(12H)	80	85	--	Deg	Note2
			Down(6H)	80	85	--	Deg	
			Left(9H)	80	85	--	Deg	
			Right(3H)	80	85	--	Deg	
Module Chromaticity CIE(x,y)	White	x	¢ =Ψ=o2 Ta=25℃	-0.04	0.290	+0.04	-	
		y			0.320			
	Red	x		-0.02	0.602	+0.02		
		y			0.311			
	Green	x			0.264			
		y			0.520			
	Blue	x			0.141			
		y			0.139			
	CT			--	--	--	%	
	-				--	--	dB	
	G			--	--	--	-	
NTSC Ratio	S		--	44	49		%	Note3

Note1.Response time is the time required for the display to transition from White to black(Rise Time Tr) and from black to white(Decay Time Tf) For additional information see FIG 1.

Note2.Viewing angle is the angle at which the contrast ratio is greater than 2.For TFT module the contrast ratio is greater than 10.The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface For more information see FIG 2.

Note3. NTSC ratio; For more information see FIG 3.

$$\text{NTSC ratio} = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}}$$

FIG. 1. Definition of Response Time : Sum of Tr and Tf

©All Rights Reserved

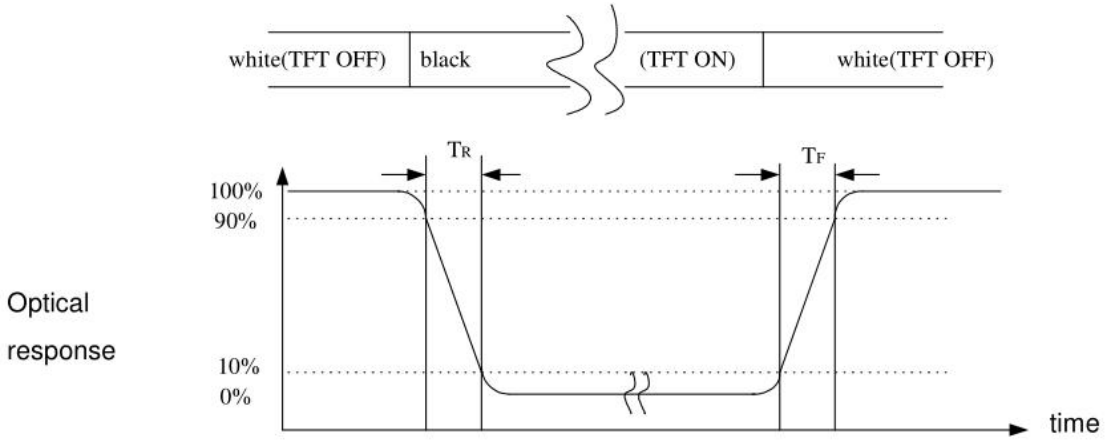

FIG.2. The definition of viewing angle

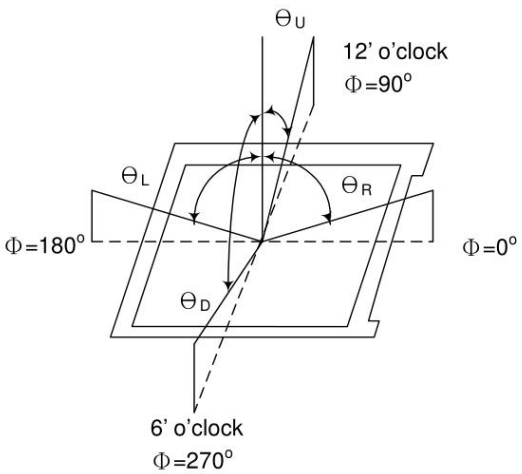

FIG.3. The definition of viewing angle

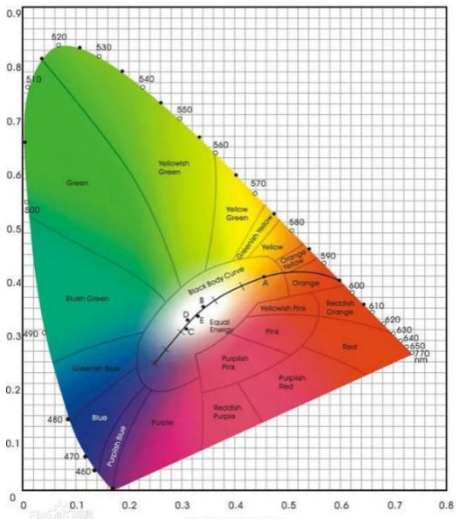

8. Timing Characteristics

8.1 Power on/off sequence

©All Rights Reserved

Power on Reset

We recommend connecting an external RC circuit with RSTB pin for digital circuit initial state stability.

Recommend RC circuit is 47KΩ + 0.47uF. (For 1ms ≤ t1≤3ms)

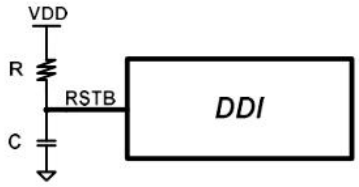

Recommend power on reset timing is shown as below.

* For RSTB pin +RC:

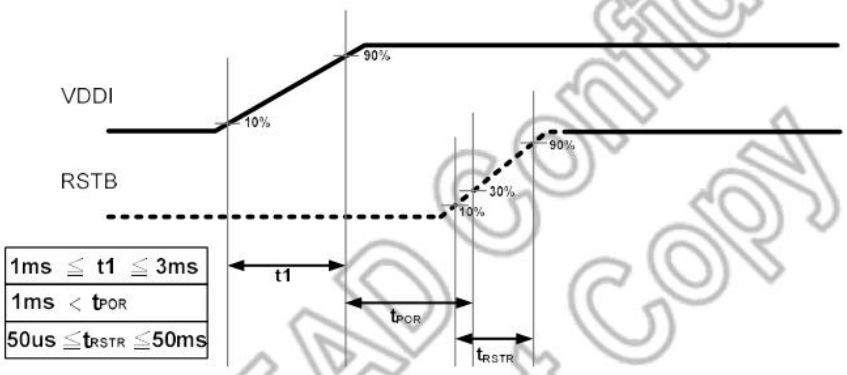

* For RSTB pin controlled by external MCU:

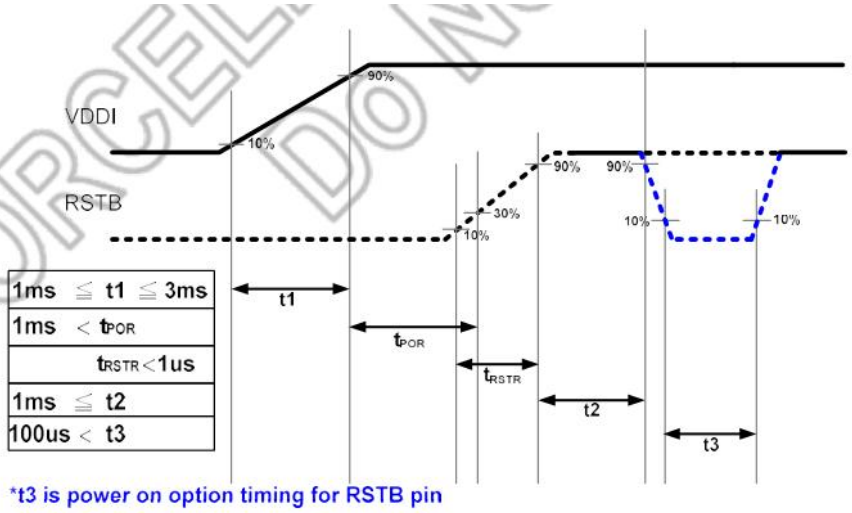

*t3 is power on option timing for RSTB pin

FORCELEAD Confidential
Do Not Copy

©All Rights Reserved

9. Reliability Test Conditions And Methods

NO.	TEST ITEMS	TEST CONDITION	INSPECTION AFTER TEST
①	High Temperature Storage	85±2℃, 240 hour Sample power off during testing	1.After testing, the product should be placed at room temperature for 2 hours before checking the product 2.The function of the display screen is normal, and the sample of the display screen should meet the normal performance defined in its specifications. No appearance, mechanical or functional defects are allowed. Reduced performance and fatal defects must be documented
②	Low Temperature Storage	-40±2℃,240 hour Sample power off during testing	
③	High Temperature	Conditions:80±2℃,240 hour	
④	Low Temperature	Conditions:-30±2℃,240 hour	
⑤	Temperature Cycle (Storage)	conditions:-30~80℃,50cycles, Sample power off;Residence at high and low temperatures was 0.5 Hours;The switching time between high and low temperature is less than 5 minutes	
⑥	Damp Proof Test (Storage)	conditions:60±2℃,90±3%RH,240 hour	
⑦	ESD Test	Discharge module:100pF +1500Ω Environmental;Conditions: Humidity: 30%-50%,Temperature:15-35℃ ; Discharge voltage: contact discharge :±2kV (except chip position); air discharge ±4 kV (except chip position);	

REMARK:

1,The Test samples should be applied to only one test item.

2,Sample side for each test item is 5pcs.

3,EL evaluation should be excepted from reliability test with humidity and temperature:Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has.

4, Failure Judgment Criterion:Basic Specification Electrical Characteristic, Mechanical Characteristic , Optical Characteristic.

©All Rights Reserved

5. Due to the failure of the product caused by ESD injury test, if the test is restored to OK after resetting, the final determination of the test is OK.

10. Handling Precautions

10.1 Mounting method

The LCD panel of quality Co.,ltd module consists of two thin glass plates with polarizes which easily be damaged. And since the module in so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the modules.

10.2 Caution of modules handling and cleaning

When cleaning the display surface, Use soft cloth with solvent [recommended below] and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns

Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (Cl) , Salfur (S)氯 (Cl) , 硫 (S)

If goods were sent without being sili8con coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (CI), Salfur (S) from customer, Responsibility is on customer.

10.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to Vdd or Vss, do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

©All Rights Reserved

10.4 packing

Module employ LCD elements and must be treated as such.

- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity.

10.5 Caution for operation

- It is an indispensable condition to drive LCD' s within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD' s undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD' s how dark color in them. However those phenomena do not mean malfunction or out of order with LCD' s, which will come back in the specified operation temperature.

- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.Usage under the maximum operating temperature, 50%Rh or less is required.

10.6 Storage

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it . And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light' s keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
- It is recommended to store them as they have been contained in the inner container at the time of delivery from us

10.7 Safety

- It is recommendable to crash damaged or unnecessary LCD' s into pieces and wash off

©All Rights Reserved

liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.

- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water

11. Precaution For Fse

- 11.1 A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.
- 11.2 On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.
- When a question is arisen in this specification
- When a new problem is arisen which is not specified in this specifications
- When an inspection specifications change or operating condition change in customer is reported to quality Co.,ltd , and some problem is arisen in this specification due to the change
- When a new problem is arisen at the customer' s operating set for sample evaluation in the customer site.

12. Packing method

TBD

©All Rights Reserved

13. Inspection standards

Title: TFT product inspection standards

1 目的purpose
为满足客户需求，保证产品试产量产阶段品质的均一性与稳定性，特制定本产品的检验标准
In order to meet customer needs and ensure the uniformity and stability of product quality during
the trial production stage, this product inspection standard is specially formulated

2 适用范围Scope of application
2.1 触显部门制程检验及出货检验
Touch display department process inspection and shipment inspection

3 职责Responsibilities
3.1 检验员严格按照本标准检验判定
The inspector shall strictly inspect and judge according to this standard
3.2 本标准适用于TFT 项目产品检验。
This standard applies to TFT project product inspection.

4 术语和定义Terms and definitions
无not have

5 检验设备与工具Inspection equipment and tools
5.1 二次元、卡尺、菲林卡、测试制具Two-dimensional, calipers, film cards, test tools

6 检验依据Basis for inspection
6.1 客户要求事项；Customer requirements;
6.2 设计图纸； design drawing ;
6.3 样品承认书； Sample acceptance certificate;
6.4 限度样品； Boundary Samples
6.5 抽样计划:采用GB-T2828.1-2012,一次抽样方案, 检验水准Ⅱ级；
Sampling plan: GB-T2828.1-2012, one sampling scheme, level II inspection;

7 检验环境： testing environment
7.1 温度: 23±2℃(常温)；temperature23±2℃(normal temperature)
7.2 湿度: 40%--65% RH； humidity 40%--65% RH
7.3 洁净度： 1000 级； Cleanliness: 1000 grade.

8 检验方法及条件: Test method and conditions
8.1 正常检验方法(上下左右旋转 45°反光检查,特殊要求需透光检查)
Normal inspection method (rotate 45° up, down, left and right for reflection inspection, and light transmission inspection is required for special requirements)
8.2 检验人员眼睛视力在1.0 及以上,检测时眼睛距产品 25±5cm,每片产品外观检验时间5～8 秒钟；The visual acuity of the inspection personnel is 1.0 or above, and the eyes are 25 ±5cm away from the
product during testing. The appearance inspection time of each product is 5~8 seconds;

9 外观检验标准: Visual inspection standard:

©All Rights Reserved

;9 外观检验标准: Visual inspection standard:

項目Item	NOMO TFT (IPS) **2.25"**	
檢查環境 Inspection enviroment	Inspection Distance: 30 cm +/- 5cm Viewing Time: 15 sec Illumination surface : 1000 ± 200 lux Illumination display : 100 ~ 200 lux Inspection angle : 90°± 45° Sampling level: Level Ⅱ AQL level : Major =0.4 ; Minor =0.65 Light Type : Fluorescent lamp	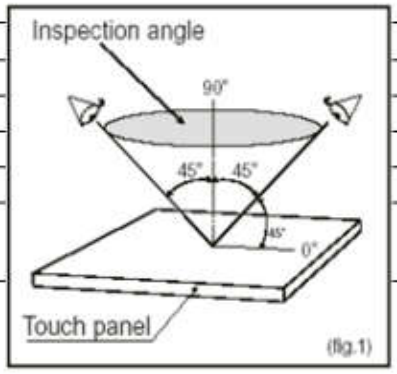
檢查項目 Inspection item	檢查標準 Inspection standards	注意事項 Note
亮點 Bright Dots Function	N=1dot	1. Invisible through 5% ND filter 2. Dark area is more than 50% of one dot.  3. Bright dot, mura and leak are defined through transmission ND Filter as following. 
暗點 Dark Dots Function	N ≦ 2, DS ≧5mm	1. Dark dot can't over to 2dots. 2. Dark area is more than 50% of one dot. 

暗或亮線 Dark or Bright lines Function	Not allow	
Mura	Invisible through 5% ND filter	
Upper Pol Dent / Bubble (凹凸點 / 氣泡) cosmetic	D ≦ 0.1 mm Ignore 0.1mm≦Φ≦0.2mm, N≦2 (But, distance> 10mm) 0.2mm<Φ, Not allow POL边缘气泡按≤玻璃边框的1/2	(目視 / 點規) Φ =(X+Y)/2

©All Rights Reserved

杂渍异物	D ≦ 0.1 mm Ignore	(目視 / 點規) Φ =(X+Y)/2 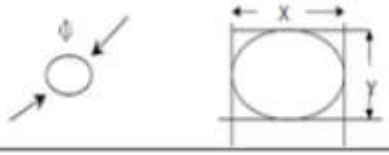
	0.1mm≦Φ≦0.2mm, N≦2 (But, distance> 5mm)	
	0.2mm<Φ, Not allow	
黑白班 / Dust Black or White Spots / Dust on display surface and cover lens	D ≦ 0.15 mm Ignore, DS ≧5mm or limited	
	0.15 < D ≦ 0.50 mm, N≦5, DS ≧15mm	
	D > 0.50 mm, Not allow	
Upper- Pol Scratch (刮傷) cosmetic	W≦0.03mm, Ignore	
	0.03mm<W≦0.08mm, L ≦5mm, N≦2 (But, distance > 10mm)	
Linear / Foreign Fiber (毛屑) (forregin material & scratch under Pol , CF/TFT surface, BL Function	W≦0.01mm, Ignored	
	0.01mm < W ≦ 0.03 mm,L ≦ 3mm, n≦ 3 (But, distance > 10mm)	
	0.03 mm<W≦0.05 mm,L≦3mm, n≦2 (But, distance > 10mm)	
	W>0.05mm, Not allow	
CG 崩邊 CG Chipping	Front side Not allow	
	Back side, D ≦ 0.20 mm Per edge N≦ 1,	
	Invisible by front side	
商標/相機孔 Brand logo / Camera hole	Not allow	
保護膜 Protect film	can not allow dirty / adhesive residue / damage and bubble	
備註 Remark	1. Can easy clean within 5 sec for dirty, by pass.	
	2. Not above list, signature limited sample.	
	4. DS = Distance.	
	5. Other defects : Not acceptable or limit sample.	
Costomer Approval		

©All Rights Reserved

14. Contact

GOLD FAME TECHNOLOGY LIMITED

Address: Rm 6, 21/F., Laurels Industrial Centre, No. 32 Tai Yau Street, San Po Kong, Kowloon, Hong Kong.

Tel: (852) 2330 8319

Email: gftech@goldfame.com

Website: www.goldfame.com

©All Rights Reserved