



FCC TEST REPORT

For

Jerryken Intelligent Technology(Shanghai) Co., Ltd.

DATA ADAPTER CARD

Test Model: DG CARD

Additional Model No.: Please Refer to Page 8

Prepared for : Jerryken Intelligent Technology(Shanghai) Co., Ltd.

Address : Room 1287, Zone B, 5th Floor, Building 1, No.668
Shangda Road, Baoshan District, Shanghai

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel : +(86) 0755-82591330

Fax : +(86) 0755-82591332

Web : www.lcs-cert.comMail : webmaster@lcs-cert.com


Date of receipt of test sample : February 14, 2025

Number of tested samples : 1

Serial number : Prototype

Date of Test : February 14, 2025 to March 28, 2025

Date of Report : March 31, 2025

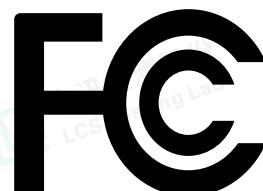

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TEST REPORT

Report No.	:	LCSA02135122E
Date of Issue	:	March 31, 2025
Testing Laboratory Name	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	:	Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Testing Location/ Procedure	:	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
Applicant's Name	:	Jerryken Intelligent Technology(Shanghai) Co., Ltd.
Address	:	Room 1287, Zone B, 5th Floor, Building 1, No.668 Shangda Road, BaoshanDistrict, Shanghai
Test Specification		
Standard	:	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014
Test Report Form No.	:	TRF-4-E-010 A/0
TRF Originator	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF	:	Dated 2011-03
Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.		
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.		
Test Item Description	:	DATA ADAPTER CARD
Trade Mark	:	Goldshell
Test Model	:	DG CARD
Result	:	Positive

Compiled by:

Coco Song / File Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang / Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TEST REPORT

Test Report No.: LCSA02135122E	<u>March 31, 2025</u> Date of issue
---------------------------------------	--

Test Model..... : DG CARD
EUT..... : DATA ADAPTER CARD
Applicant..... : Jerryken Intelligent Technology(Shanghai) Co., Ltd.
Address..... : Room 1287, Zone B, 5th Floor, Building 1, No.668 Shangda Road, BaoshanDistrict, Shanghai
Manufacturer..... : Jerryken Intelligent Technology(Shanghai) Co., Ltd.
Address..... : Room 1287, Zone B, 5th Floor, Building 1, No.668 Shangda Road, BaoshanDistrict, Shanghai
Factory..... : Jerryken Intelligent Technology(Shanghai) Co., Ltd.
Address..... : Room 1287, Zone B, 5th Floor, Building 1, No.668 Shangda Road, BaoshanDistrict, Shanghai
Telephone..... : /
Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	March 31, 2025	Initial Issue	/



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

Test Report Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1 Description of Standards and Results	6
1.2 Description of Test Modes	7
2. GENERAL INFORMATION	8
2.1 Description of Device (EUT).....	8
2.2 Support equipment List	8
2.3 Description of Test Facility	8
2.4 Measurement Uncertainty	9
3. MEASURING DEVICES AND TEST EQUIPMENT	10
4. EMISSION TEST RESULTS (EMI)	11
4.1 Conducted emissions on AC mains	11
4.2 Radiated emissions (Below 1GHz)	14
4.3 Radiated emissions (Above 1GHz)	17
5. TEST SETUP PHOTOS	20
6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	22



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1. SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Description of Test Item	Standard	Limits	Result
Conducted emissions on AC mains	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.107, Class B	Pass
Radiated emissions (Below 1GHz)	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.109, Class B	Pass
Radiated emissions (Above 1GHz)	FCC 47 CFR Part 15, Subpart B ANSI C63.4-2014	15.109, Class B	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1.2 Description of Test Modes

No	Title	Description
TM1	Working(DC 20V From Adapter Input AC 120V/60Hz)	Record



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



2. GENERAL INFORMATION

2.1 Description of Device (EUT)

EUT	: DATA ADAPTER CARD
Test Model	: DG CARD
Model Lists	: AE CARD, KA CARD, AL CARD
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Power Supply	For adapter: Input: 100-240V~, 50-60Hz Output: 20V---7.0A, 140W/19.95V---5A/15V---3A/ 9V---3A/5V---3A 15W For DATA ADAPTER CARD: Input: 20V---7.0A, 140W
Highest Internal Frequency	: FX > 108 MHz
Classification of Equipment	: Class B

Highest internal frequency (Fx)	Highest measured frequency
Fx ≤ 1.705MHz	30MHz
1.705MHz < Fx ≤ 108MHz	1GHz
108MHz < Fx ≤ 500MHz	2GHz
500MHz < Fx ≤ 1000MHz	5GHz
Fx > 1GHz	5 x Fx up to a maximum of 40GHz

2.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	PC	Lenovo E41-55	MP1ZW5C4	/

2.3 Description of Test Facility

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



2.4 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emission (150kHz to 30MHz)	± 2.35 dB
Radiated Emission (30MHz to 1000MHz)	± 3.48 dB
Radiated Emission (above 1000MHz)	± 3.90 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



3. MEASURING DEVICES AND TEST EQUIPMENT

Conducted emissions from AC mains power ports (150kHz-30MHz)

Equipment	Manufacturer	Model No	Serial No.	Due Date
EMI Test Software	Farad	EZ	/	/
Artificial Mains	R&S	ENV216	101288	2025-06-05
Pulse Limiter	R&S	ESH3-Z2	102750-NB	2025-06-05
EMI Test Receiver	R&S	ESR3	102312	2026-03-05

Radiated emissions (30MHz-1GHz)

Radiated emissions (above 1GHz)

Equipment	Manufacturer	Model No	Serial No.	Due Date
EMI Test Software	AUDIX	E3	/	N/A
By-log Antenna	SCHWARZBECK	VULB9163	01143	2027-07-19
Horn Antenna	SCHWARZBECK	3115	EABF-018	2027-07-19
EMI Test Receiver	R&S	ESR3	102311	2025-06-05
Broadband Preamplifier	/	BP-01M18G	P190501	2025-06-05
EMI Test Receiver	R&S	ESCI7	101173	2025-10-07
By-log Antenna	SchwarzZBECK	VULB9163	01565	2027-07-12
EMI Test Software	Farad	EZ	/	N/A
MXA Signal Analyzer	Agilent	N9020A	MY53290398	2025-06-05
EMI Test Receiver	R&S	ESPI	101940	2025-06-05



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. EMISSION TEST RESULTS (EMI)


4.1 Conducted emissions on AC mains

Test Requirement:	15.107, Class B		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.4-2014		
Procedure:	An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. Remark: Level= Read Level+ Cable Loss+ LISN Factor		

4.1.1 E.U.T. Operation:

Operating Environment:			
Temperature:	24.4°C	Humidity:	53.0%
Pre test mode:	TM1		
Final test mode:	TM1		


4.1.2 Test Setup Diagram:

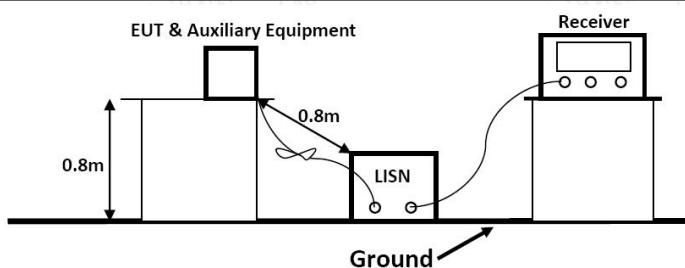



4.1.3 Test Data:

TM1 / Line: Line

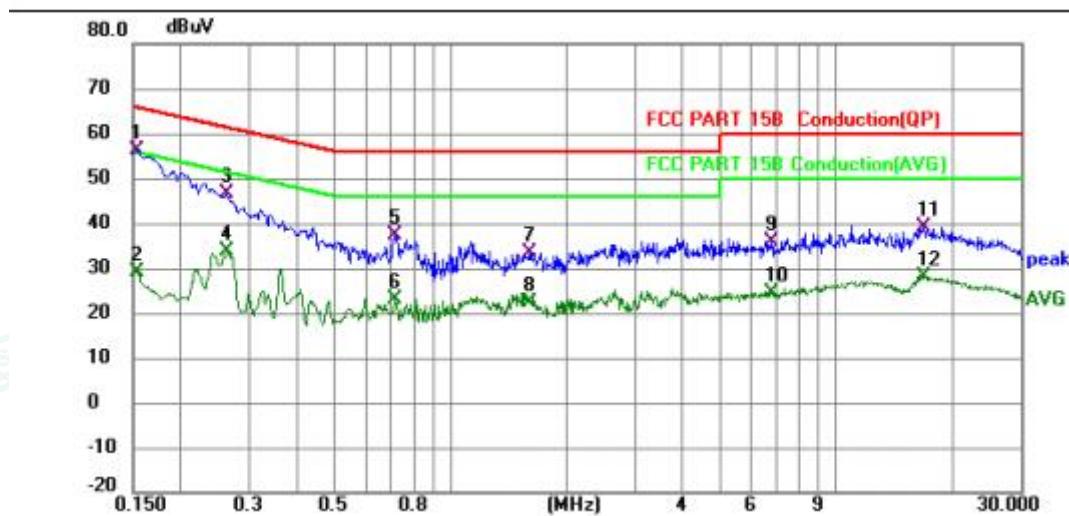


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment Limit dBuV	Margin dB	Detector	Comment
1	*	0.154	35.64	20.63	56.27	65.79	-9.52	QP
2		0.154	8.55	20.63	29.18	55.79	-26.61	AVG
3		0.263	25.70	20.73	46.43	61.34	-14.91	QP
4		0.263	13.11	20.73	33.84	51.34	-17.50	AVG
5		0.717	16.33	20.95	37.28	56.00	-18.72	QP
6		0.717	2.04	20.95	22.99	46.00	-23.01	AVG
7		1.599	12.53	20.83	33.36	56.00	-22.64	QP
8		1.599	1.49	20.83	22.32	46.00	-23.68	AVG
9		6.819	15.67	20.40	36.07	60.00	-23.93	QP
10		6.819	4.06	20.40	24.46	50.00	-25.54	AVG
11		16.791	18.55	20.70	39.25	60.00	-20.75	QP
12		16.791	7.31	20.70	28.01	50.00	-21.99	AVG





TM1 / Line: Neutral

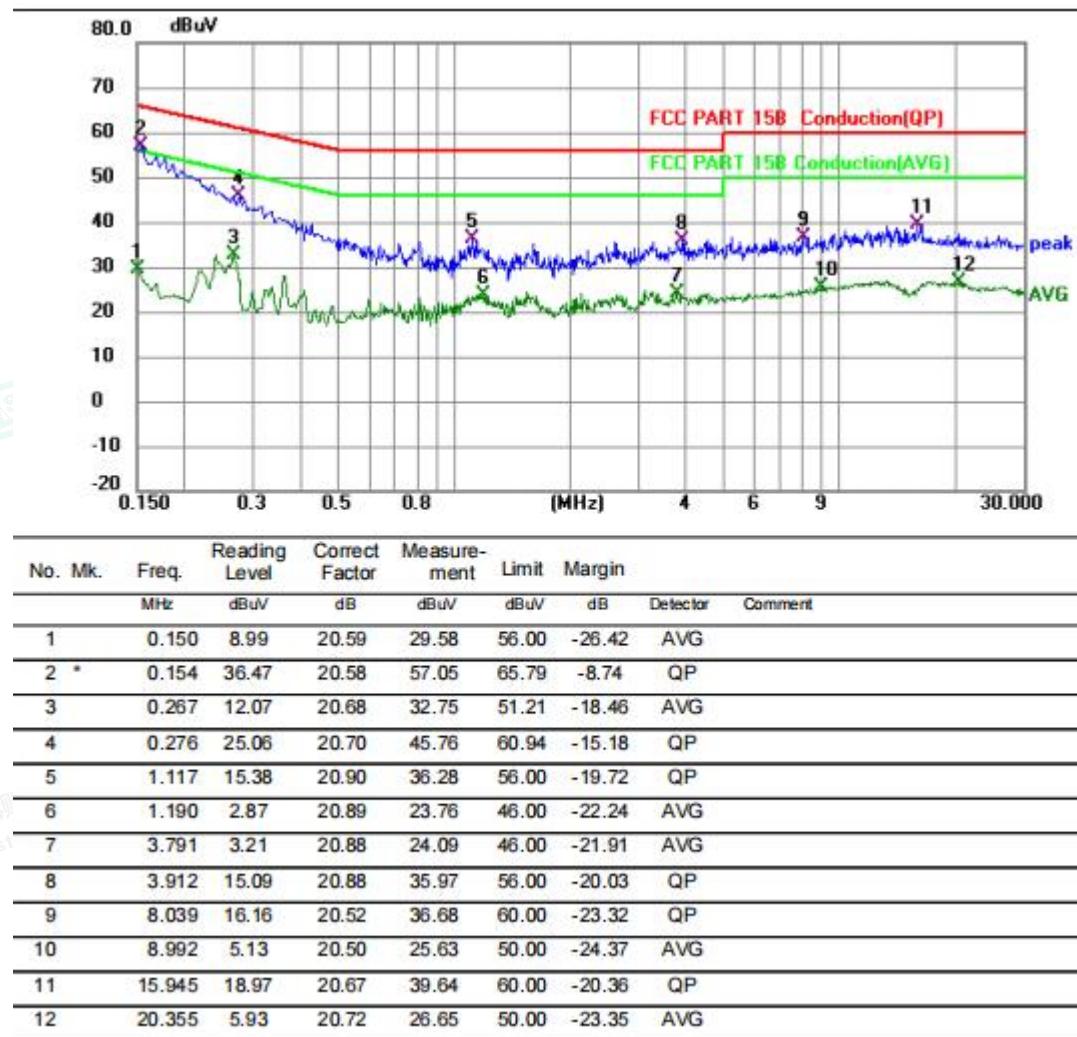

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
		dBuV	dB	dBuV	dB			
1	0.150	8.99	20.59	29.58	56.00	-26.42	Avg	
2 *	0.154	36.47	20.58	57.05	65.79	-8.74	QP	
3	0.267	12.07	20.68	32.75	51.21	-18.46	Avg	
4	0.276	25.06	20.70	45.76	60.94	-15.18	QP	
5	1.117	15.38	20.90	36.28	56.00	-19.72	QP	
6	1.190	2.87	20.89	23.76	46.00	-22.24	Avg	
7	3.791	3.21	20.88	24.09	46.00	-21.91	Avg	
8	3.912	15.09	20.88	35.97	56.00	-20.03	QP	
9	8.039	16.16	20.52	36.68	60.00	-23.32	QP	
10	8.992	5.13	20.50	25.63	50.00	-24.37	Avg	
11	15.945	18.97	20.67	39.64	60.00	-20.36	QP	
12	20.355	5.93	20.72	26.65	50.00	-23.35	Avg	

***Note: 1) Pre-scan all modes and recorded the worst case results in this report.

2) Margin= Reading level + Correct factor-Limit

Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limitter





4.2 Radiated emissions (Below 1GHz)

Test Requirement:	15.109, Class B				
Test Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:				
Frequency of emission (MHz)		Field strength @3m		Field strength @10m	
		(uV/m)	(dBuV/m)	(uV/m)	(dBuV/m)
30 – 88		100	40	30	29.5
88 – 216		150	43.5	45	33.1
216 – 960		200	46	60	35.6
Above 960		500	54	150	43.5

Test Method: ANSI C63.4-2014


Procedure: An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

4.2.1 E.U.T. Operation:

Operating Environment:			
Temperature:	26.4°C	Humidity:	54.2 %
Pre test mode:	TM1		
Final test mode:	TM1		


4.2.2 Test Setup Diagram:

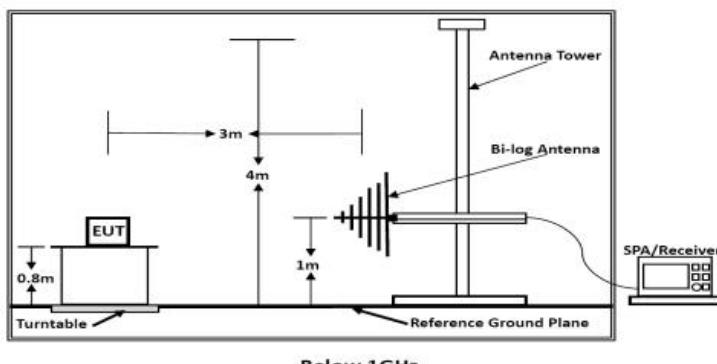



4.2.3 Test Data:

TM1 / Polarization: Horizontal

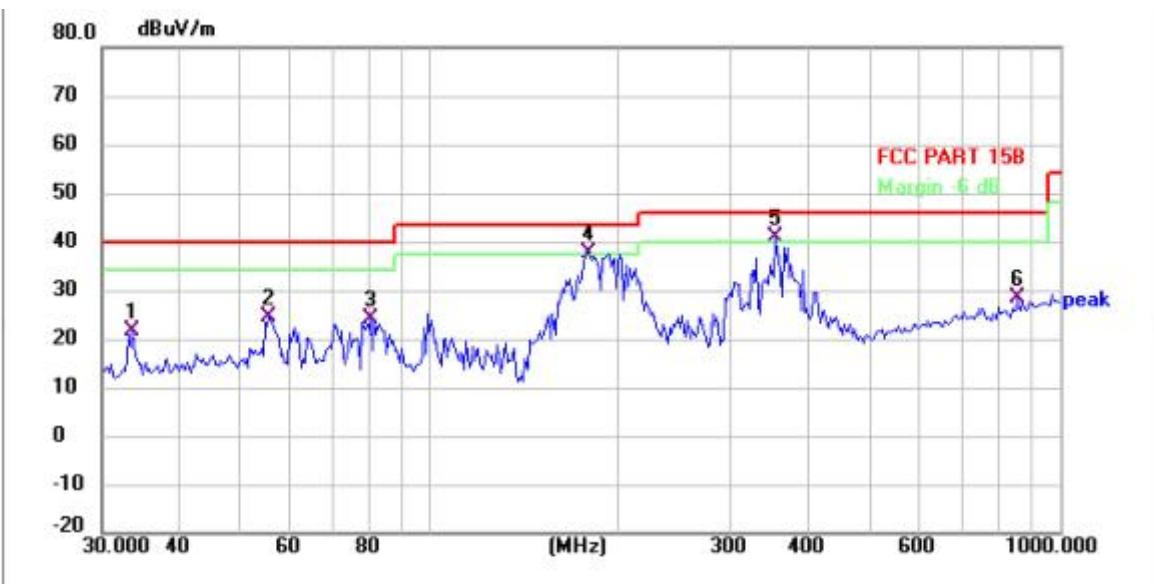


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	33.570	34.22	-12.58	21.64	40.00	-18.36	QP	P	
2	55.288	36.01	-11.49	24.52	40.00	-15.48	QP	P	
3	80.238	39.68	-15.48	24.20	40.00	-15.80	QP	P	
4 !	178.770	52.70	-15.00	37.70	43.50	-5.80	QP	P	
5 *	353.447	50.05	-8.98	41.07	46.00	-4.93	QP	P	
6	856.760	30.56	-2.02	28.54	46.00	-17.46	QP	P	





TM1 / Polarization: Vertical

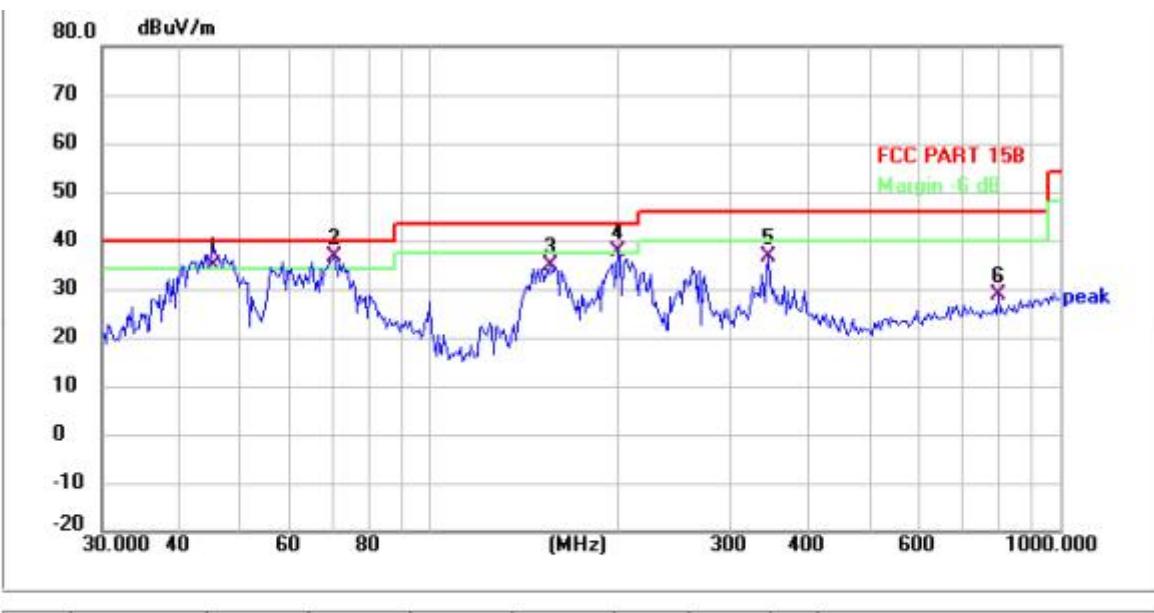

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 !	45.095	45.80	-11.10	34.70	40.00	-5.30	QP	P	
2 *	70.210	51.20	-14.62	36.58	40.00	-3.42	QP	P	
3	155.331	50.01	-15.24	34.77	43.50	-8.73	QP	P	
4 !	198.642	51.21	-13.50	37.71	43.50	-5.79	QP	P	
5	343.651	45.89	-9.23	36.66	46.00	-9.34	QP	P	
6	798.620	32.03	-3.24	28.79	46.00	-17.21	QP	P	

Note:1)Pre-Scan all mode, Thus record worse case mode result in this report.

2) Margin= Reading level + Correct factor – Limit

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




4.3 Radiated emissions (Above 1GHz)

Test Requirement:	15.109, Class B			
Test Limit:	Frequency of emission (MHz)		Field strength @3m	
		Average (uV/m)	Average(d BuV/m)	Peak (dBuV/m)
	Above 1GHz	500	54	74
Test Method:	ANSI C63.4-2014			
Procedure:	<p>An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. For below 1GHz test, Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. For above 1GHz test, Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.</p> <p>Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p>			

4.3.1 E.U.T. Operation:

Operating Environment:			
Temperature:	23.9 °C	Humidity:	52.0 %
Pre test mode:	TM1		
Final test mode:	TM1		

4.3.2 Test Setup Diagram:

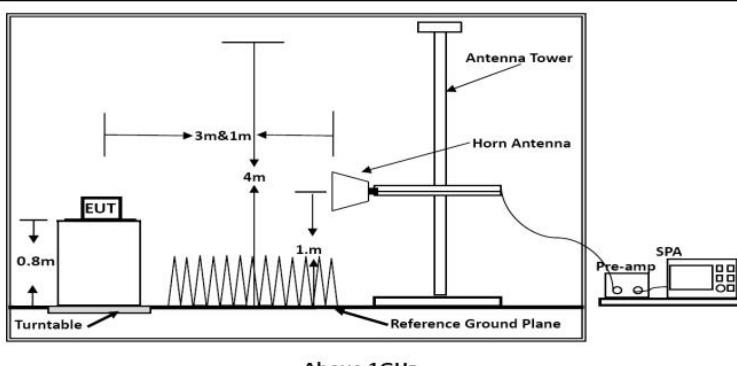


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



4.3.3 Test Data:

TM1 / Polarization: Horizontal

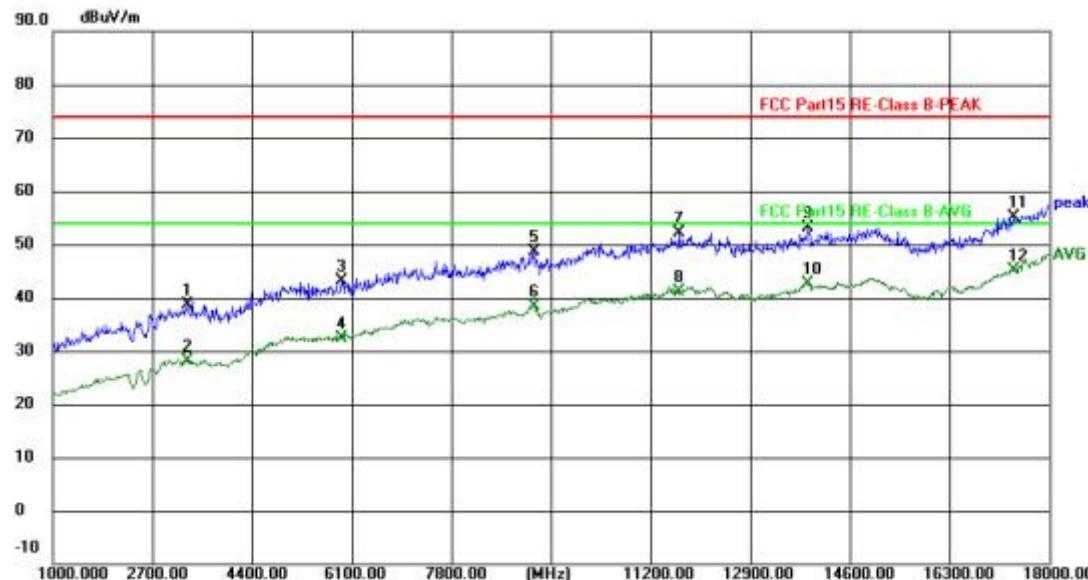

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	3295.000	48.21	-9.49	38.72	74.00	-35.28	peak	P	
2	3295.000	37.59	-9.49	28.10	54.00	-25.90	AVG	P	
3	5930.000	46.64	-3.62	43.02	74.00	-30.98	peak	P	
4	5930.000	36.05	-3.62	32.43	54.00	-21.57	AVG	P	
5	9211.000	46.45	2.25	48.70	74.00	-25.30	peak	P	
6	9211.000	36.02	2.25	38.27	54.00	-15.73	AVG	P	
7	11693.000	45.77	6.28	52.05	74.00	-21.95	peak	P	
8	11693.000	34.92	6.28	41.20	54.00	-12.80	AVG	P	
9	13886.000	44.26	8.84	53.10	74.00	-20.90	peak	P	
10	13886.000	33.75	8.84	42.59	54.00	-11.41	AVG	P	
11	17388.000	41.45	13.79	55.24	74.00	-18.76	peak	P	
12	17388.000	31.28	13.79	45.07	54.00	-8.93	AVG	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



TM1 / Polarization: Vertical

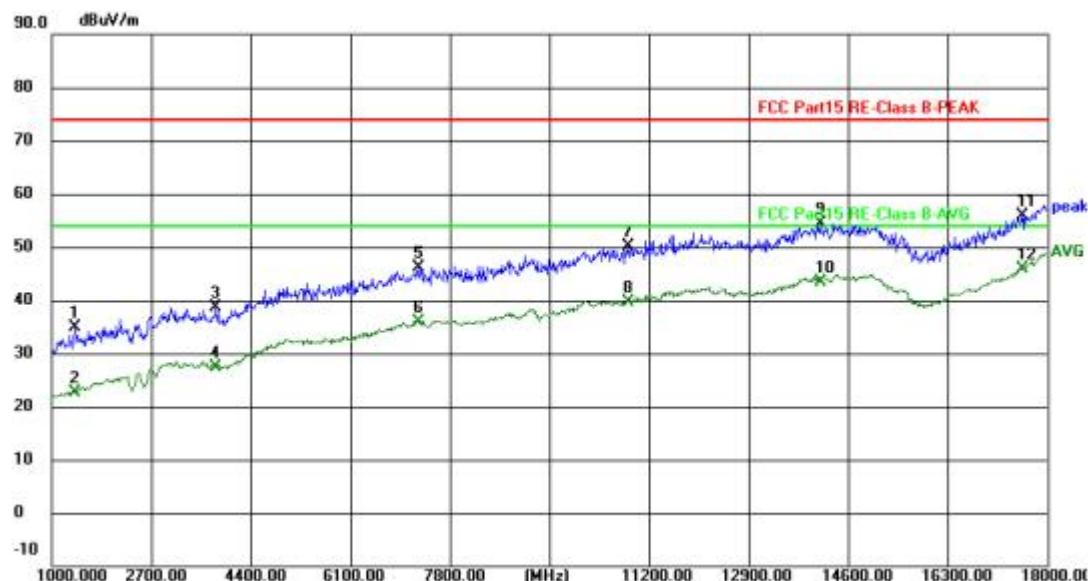

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	1391.000	50.02	-15.26	34.76	74.00	-39.24	peak	P	
2	1391.000	37.95	-15.26	22.69	54.00	-31.31	Avg	P	
3	3805.000	47.59	-8.88	38.71	74.00	-35.29	peak	P	
4	3805.000	36.32	-8.88	27.44	54.00	-26.56	Avg	P	
5	7256.000	45.85	0.23	46.08	74.00	-27.92	peak	P	
6	7256.000	35.62	0.23	35.85	54.00	-18.15	Avg	P	
7	10843.000	45.16	5.06	50.22	74.00	-23.78	peak	P	
8	10843.000	34.67	5.06	39.73	54.00	-14.27	Avg	P	
9	14124.000	45.15	9.28	54.43	74.00	-19.57	peak	P	
10	14124.000	34.01	9.28	43.29	54.00	-10.71	Avg	P	
11	17575.000	40.95	14.97	55.92	74.00	-18.08	peak	P	
12	17575.000	30.88	14.97	45.85	54.00	-8.15	Avg	P	

Note:1)Pre-Scan all mode, Thus record worse case mode result in this report.


2) Margin= Reading level + Correct factor – Limit

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor





5. TEST SETUP PHOTOS

Conducted emissions on AC mains

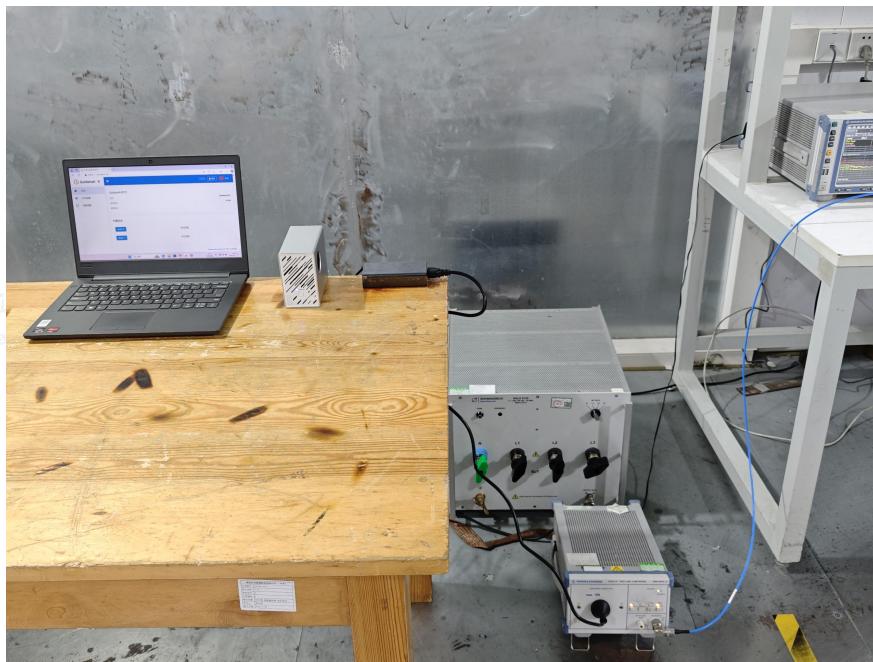

Radiated emissions (Below 1GHz)

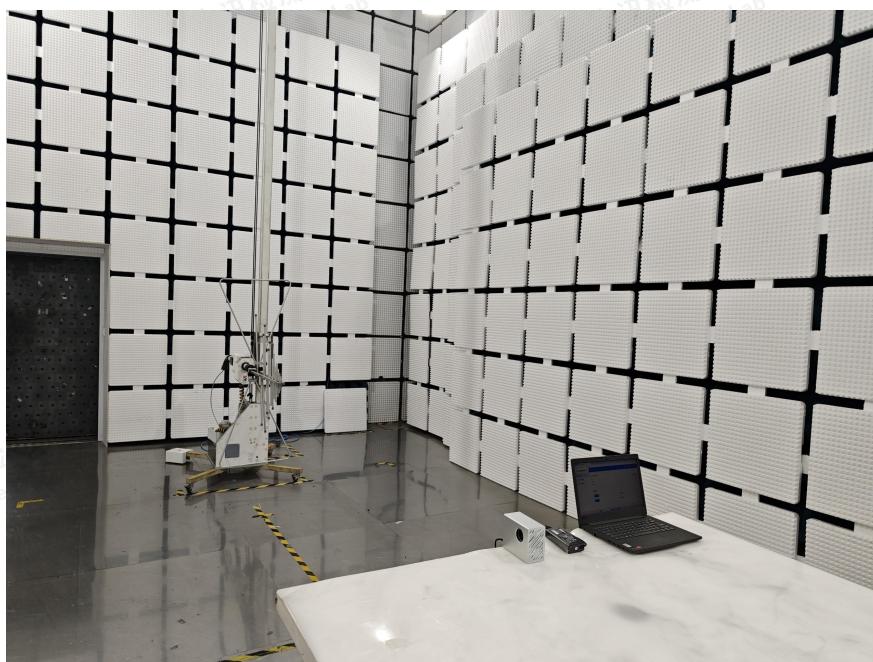

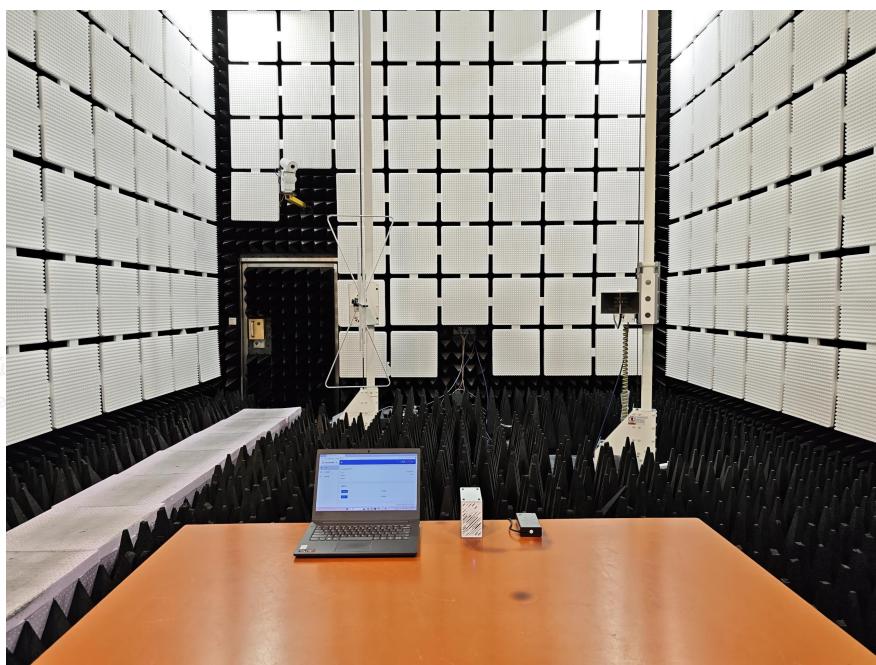**Radiated emissions (Above 1GHz)**

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



6. EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)



Fig. 1

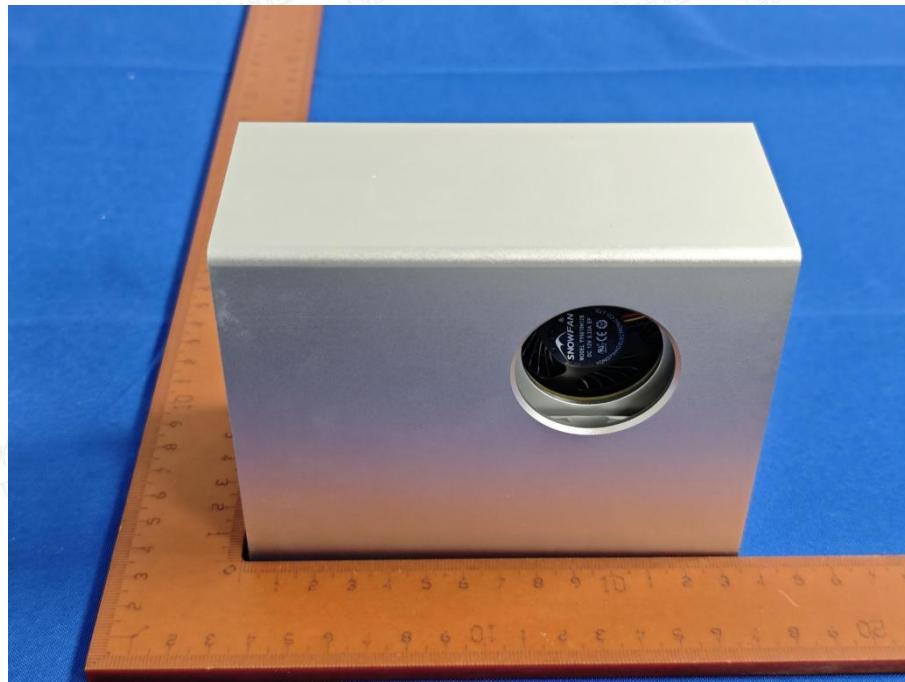


Fig. 2



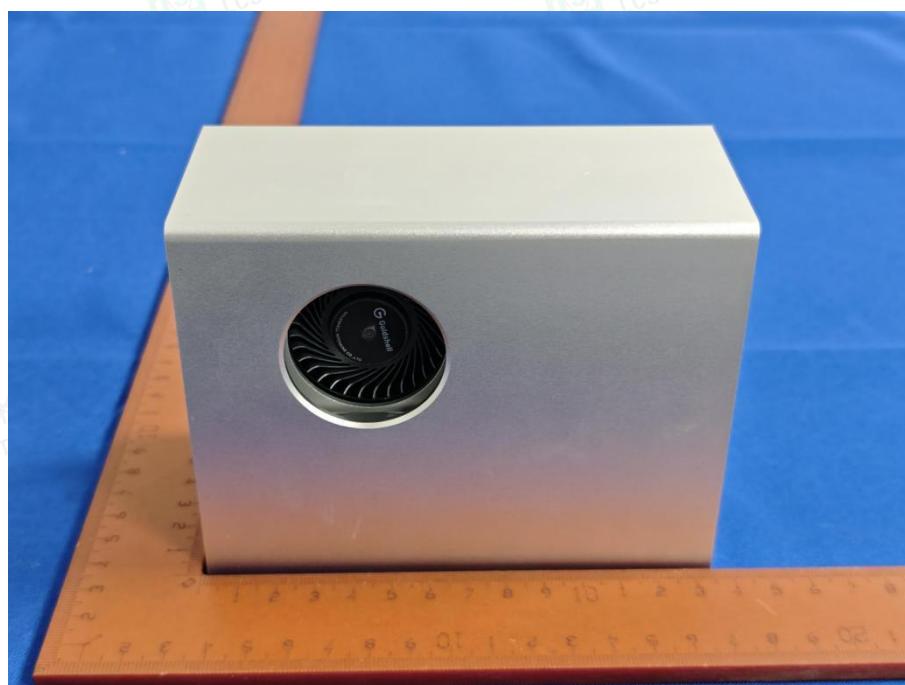


Fig. 3



Fig. 4



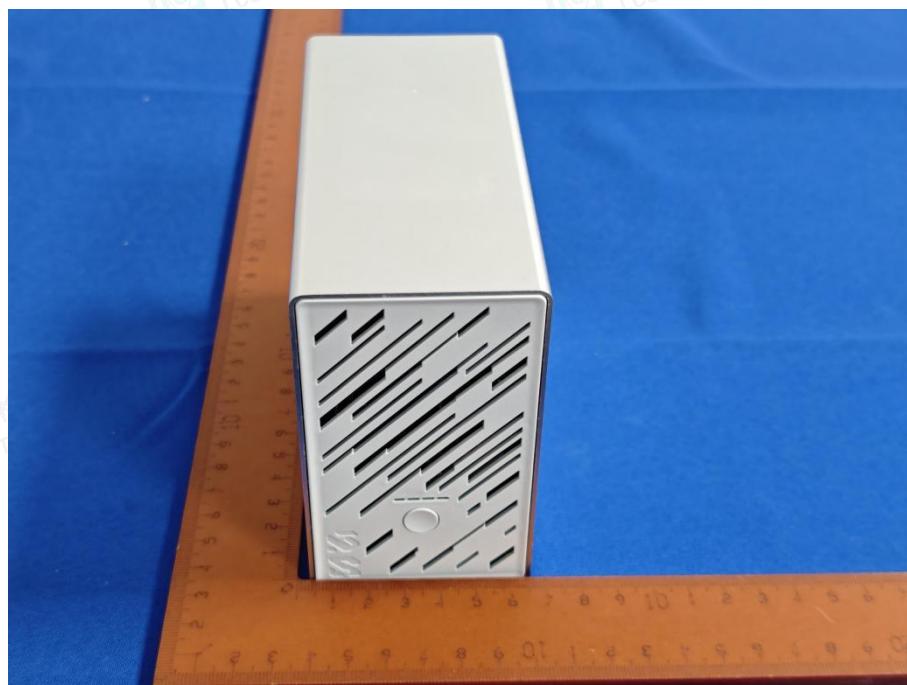


Fig. 5

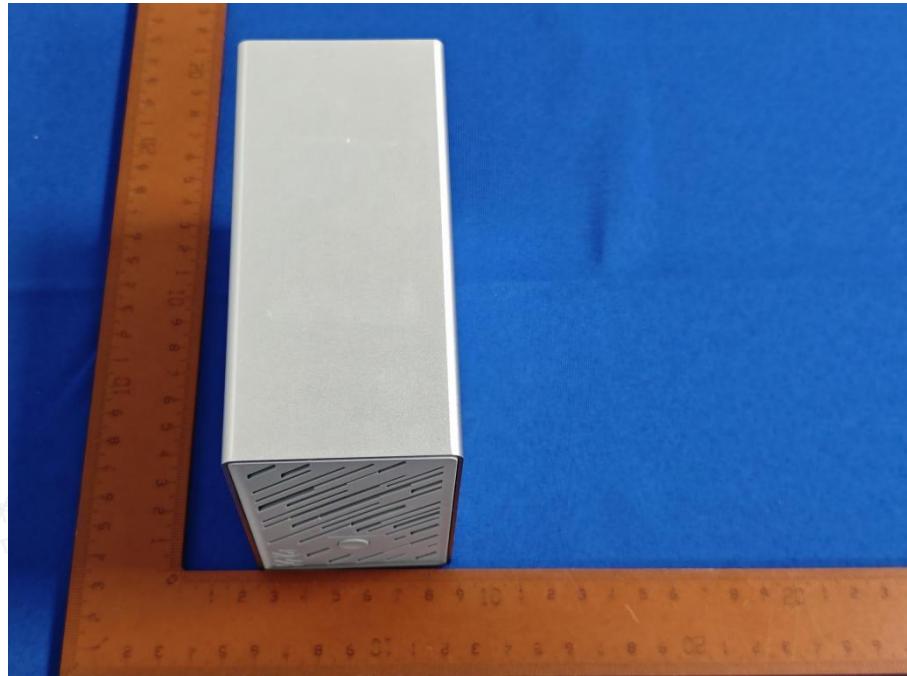


Fig. 6



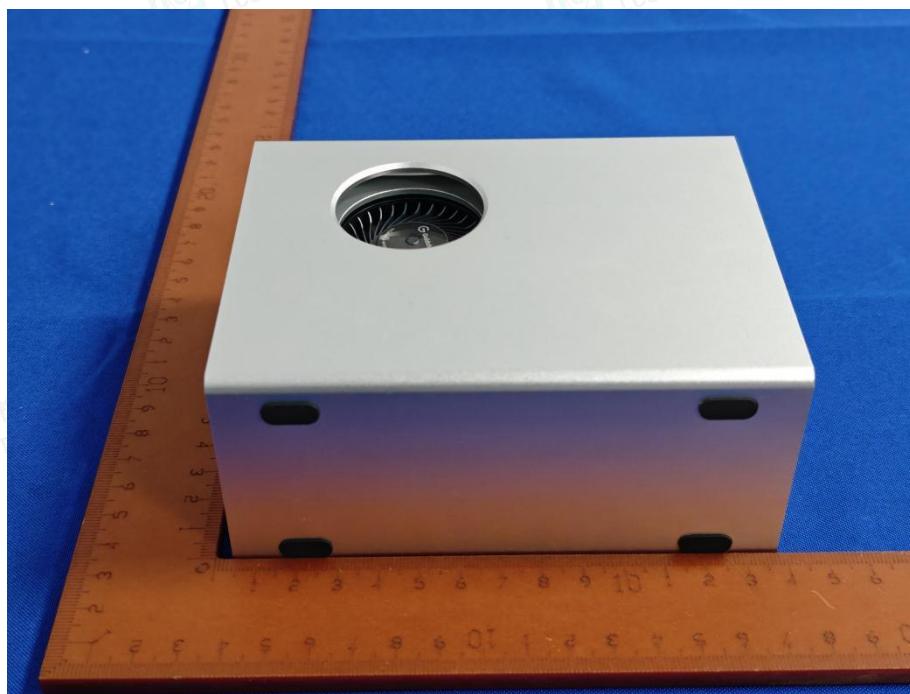


Fig. 7

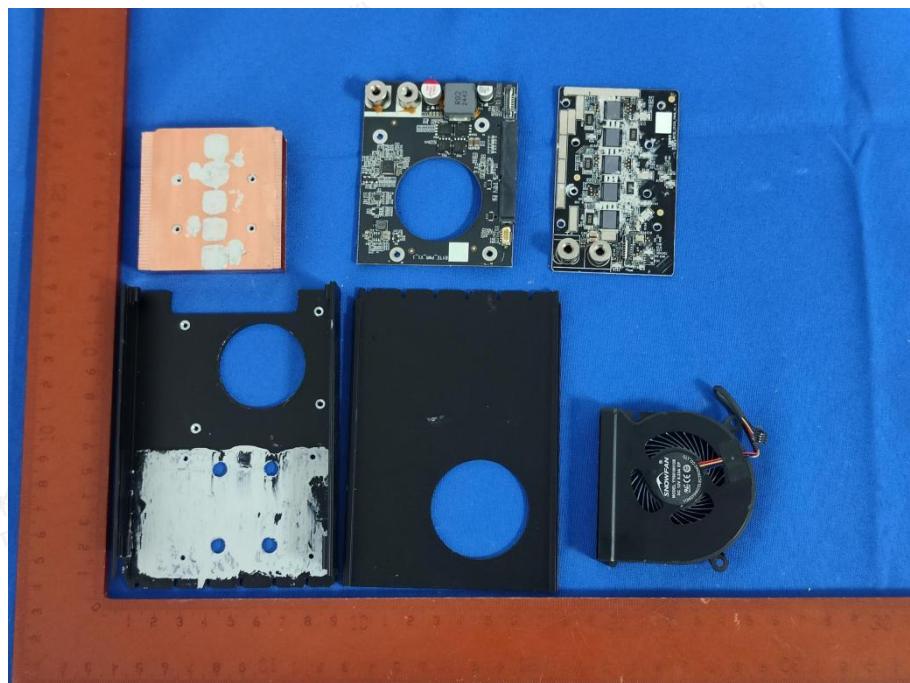


Fig. 8



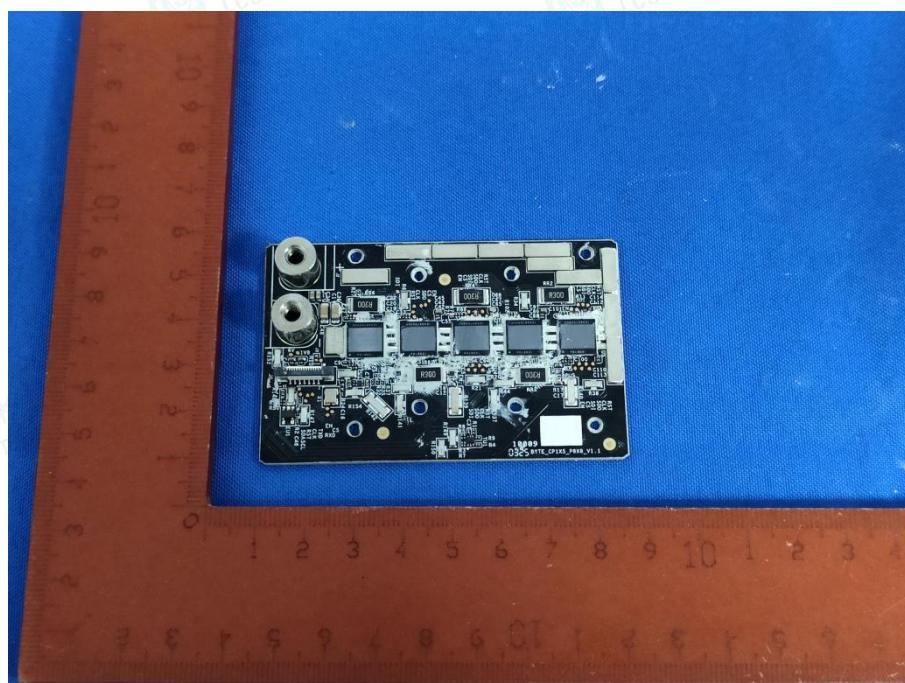


Fig. 9

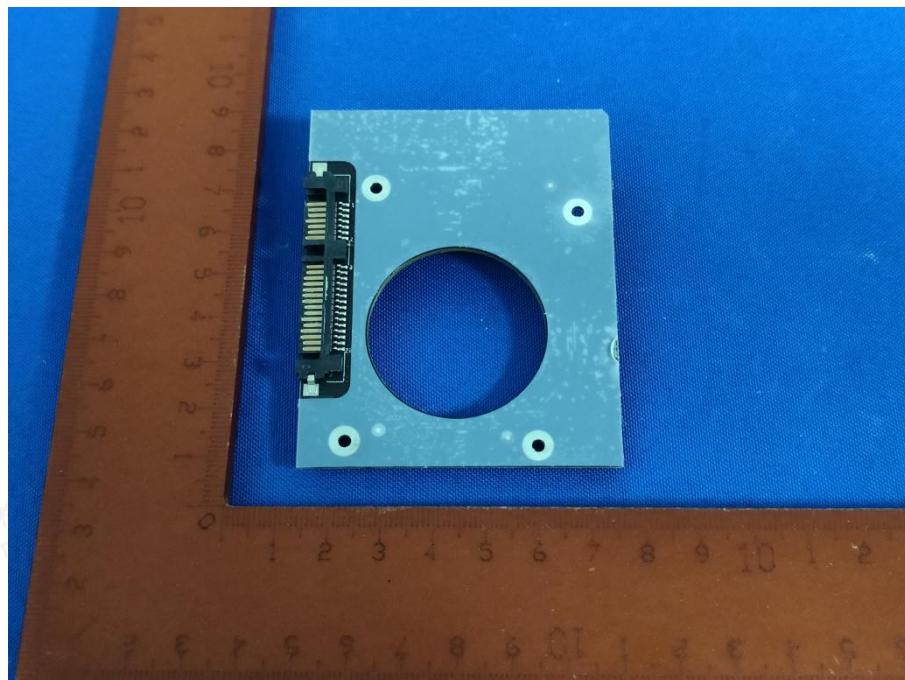


Fig. 10





Fig. 11

--- End of Report ---



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity