GOLPHIN ANNO S

251901049

COMPUTER NETWORKS

Ex.No.3	**Experiments on CISCO PACKET TRACER (Simulation Tool):**
Date:	**a)** To understand environment of CISCO PACKET TRACER to design simple network. **b)** Analyse the behaviour of network devices using CISCO PACKET TRACER simulator. Design a simple network with multiple nodes and connect via networking devices available in library. Perform simulation and trace communication behaviour of specified network devices. 1: Use only HUB to design a small network having 4 to 6 hosts 2: Use only a Switch to design a small network with 4 to 6 hosts. 3: Use both the device (HUB and SWITCH) for a network and find out functioning difference between switch and hub. **Find out the network topology implemented in your college and draw and label that topology in your observation book.**

AIM: To study the Packet tracer tool Installation and analyse the behaviour of network devices using **CISCO PACKET TRACER**

INSTALLING PACKET TRACER

Windows

Visit the Cisco Networking Academy website (www.netacad.com).
Log in using your Cisco NetAcad account.
Download the Packet Tracer installer for Windows.
Run the setup file, accept the license agreement, and complete the installation.

Linux

Download the appropriate Packet Tracer package for your Linux distribution.


Open the terminal and make the installer executable:

chmod +x PacketTracer601_i386_installer-rpm.bin

Run the installer:

./PacketTracer601_i386_installer-rpm.bin

Follow the on-screen instructions to complete the installation.

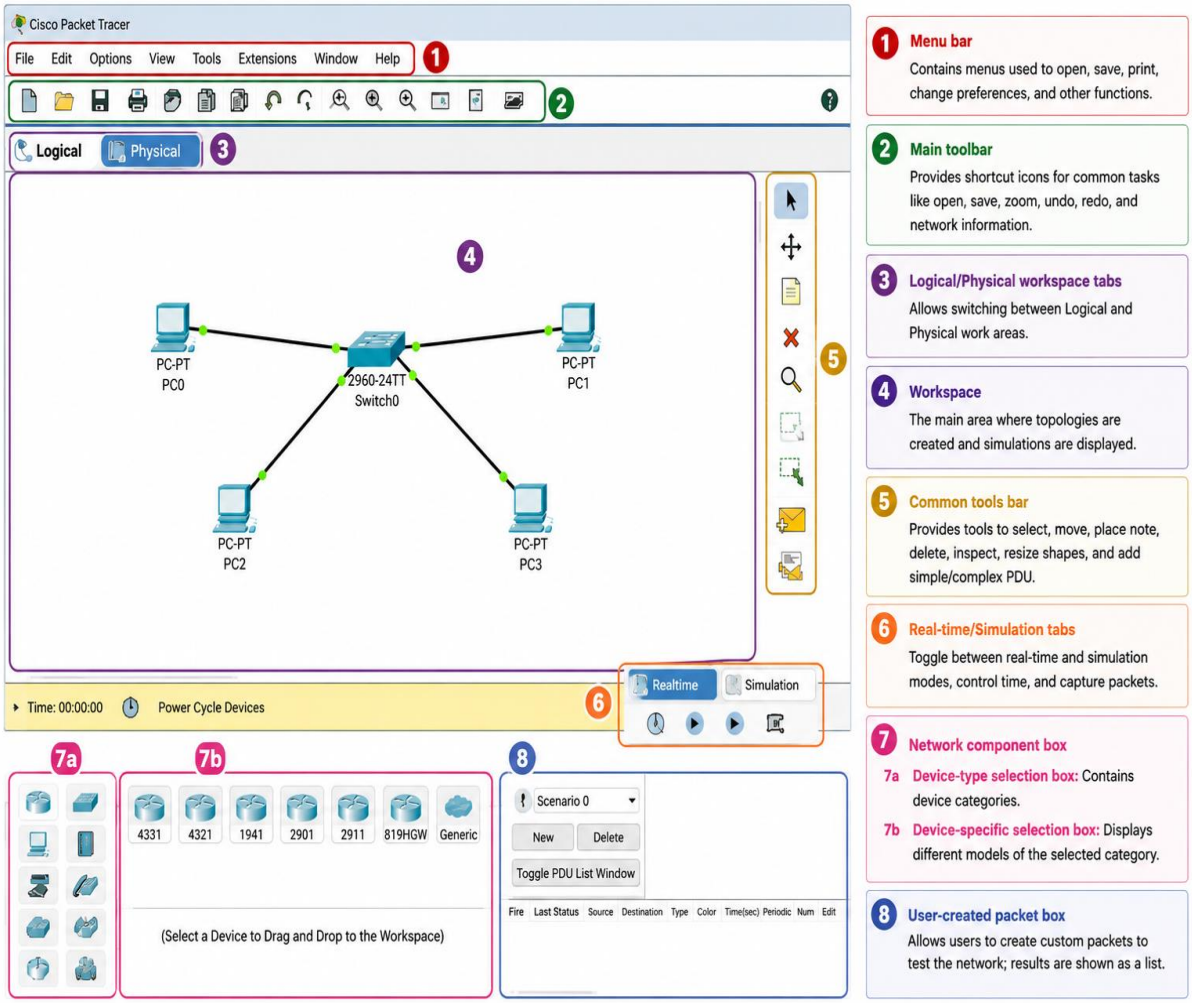

b) Analyse the behaviour of network devices using CISCO PACKET TRACER simulator.

Scenario 1: Network Using Only a Hub

Procedure

Step 1

Open **Cisco Packet Tracer**.

Step 2

From **Network Devices**, drag a **Hub** to the workspace.

Step 3

Drag **4 PCs** (PC0, PC1, PC2, and PC3) from **End Devices**.

Step 4

Connect each PC to the Hub using **Copper Straight-Through** cables.

Step 5

Assign the following IP addresses.

Device	IP Address	Subnet Mask
PC0	192.168.1.1	255.255.255.0
PC1	192.168.1.2	255.255.255.0
PC2	192.168.1.3	255.255.255.0
PC3	192.168.1.4	255.255.255.0


Step 6
Switch to **Simulation Mode**.

Step 7
Click **Add Simple PDU** and send a packet from **PC0** to **PC2**.

Step 8
Observe the packet movement.

Observation

- The Hub broadcasts the packet to **all connected hosts**.
- Every PC receives the packet.
- Only the destination PC accepts the packet.
- Network collisions may occur because all devices share the same communication channel.

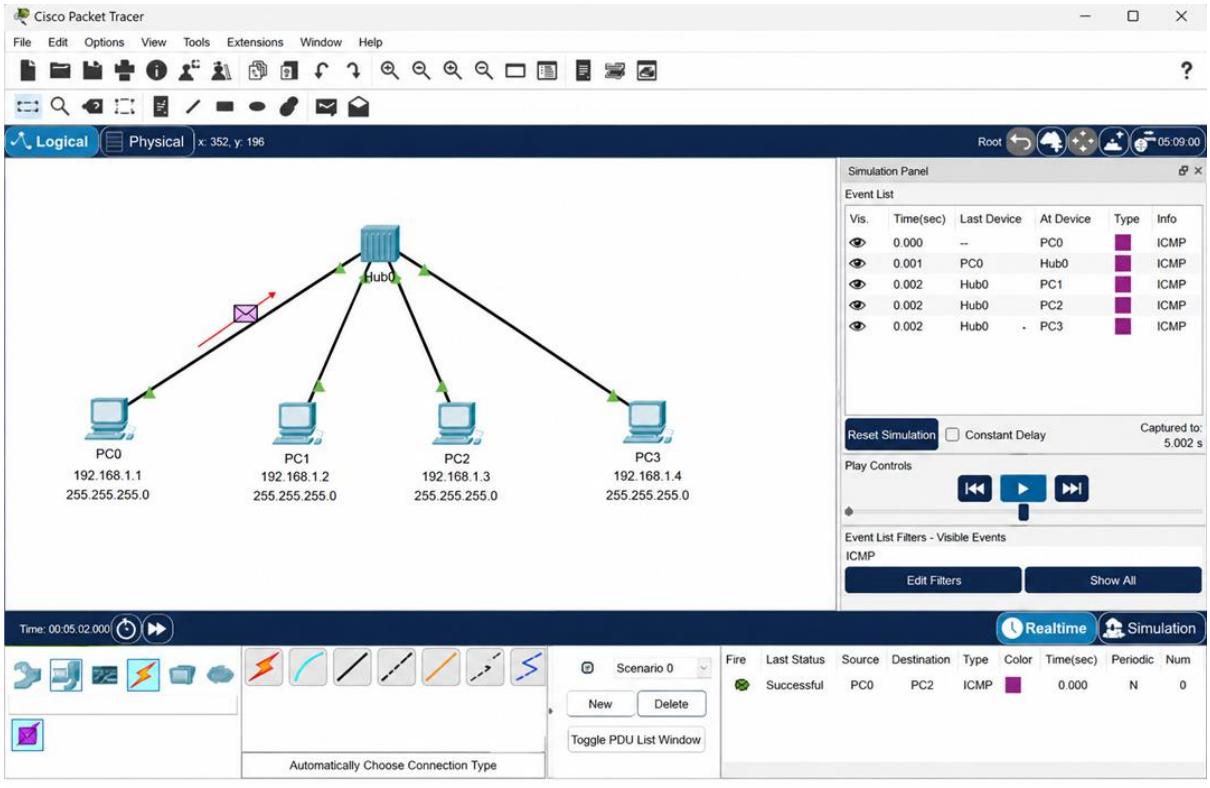


c) Scenario 2: Network Using Only a Switch

Aim

To design a simple network using a switch and observe the communication behaviour during simulation.

Network Topology



Devices Required


Device	Quantity
Switch 2960	1
PC-PT	4
Copper Straight-Through Cable	4

Procedure

Step 1
Open **Cisco Packet Tracer**.
Step 2
From **Network Devices → Switches**, drag a **2960 Switch** into the workspace.
Step 3
Drag four PCs (PC0, PC1, PC2, and PC3) from **End Devices**.
Step 4
Connect each PC to the switch using **Copper Straight-Through** cables.
Step 5
Assign the following IP addresses.

Device	IP Address	Subnet Mask
PC0	192.168.1.1	255.255.255.0
PC1	192.168.1.2	255.255.255.0
PC2	192.168.1.3	255.255.255.0
PC3	192.168.1.4	255.255.255.0

Step 6
Switch to **Simulation Mode**.
Step 7
Select **Add Simple PDU**.
Step 8
Click **PC0** and then **PC2**.
Step 9
Observe the packet movement.

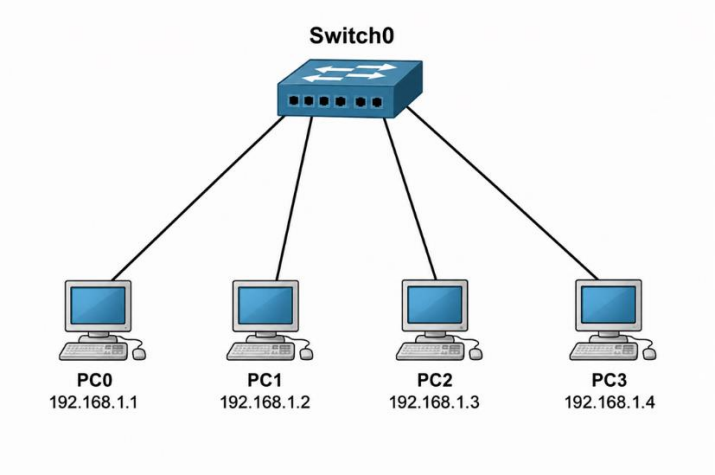

Observation


- The switch learns the MAC addresses of connected devices.
- Initially, the switch may flood the frame if the destination MAC address is unknown.
- Once the MAC address table is learned, the switch forwards packets **only to the destination port**.
- Other PCs do not receive the packet.
- No collisions occur because each switch port forms a separate collision domain.

Scenario 3: Network Using Both Hub and Switch

Aim

To design a network using both a hub and a switch and compare their communication behaviour.

Network Topology

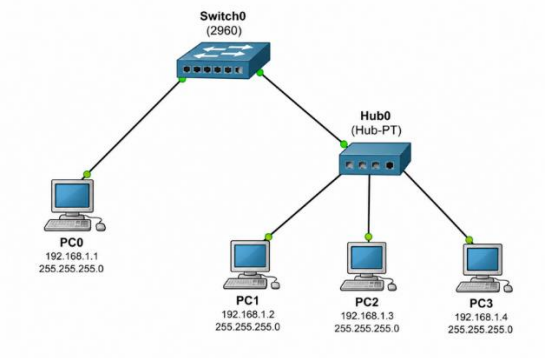

Devices Required

Device	Quantity
Switch 2960	1
Hub	1
PC-PT	4

Device	Quantity
Copper Straight-Through Cable	5

Procedure

Step 1

Open Cisco Packet Tracer.

Step 2

Place one **2960 Switch** and one **Hub** in the workspace.

Step 3

Add four PCs.

Step 4

Connect:

PC0 → Switch

Hub → Switch

PC1 → Hub

PC2 → Hub

PC3 → Hub

Step 5

Assign the following IP addresses.

Device	IP Address	Subnet Mask
PC0	192.168.1.1	255.255.255.0
PC1	192.168.1.2	255.255.255.0
PC2	192.168.1.3	255.255.255.0
PC3	192.168.1.4	255.255.255.0

Step 6

Switch to **Simulation Mode**.

Step 7

Send a Simple PDU from **PC0** to **PC2**.


Step 8


Observe the packet movement.


Observation

- The switch forwards the frame only toward the hub.
- The hub broadcasts the frame to all devices connected to it.
- PC1 and PC3 receive the frame but discard it.
- PC2 accepts the packet because it is the intended destination.
- The switch limits unnecessary traffic, while the hub broadcasts within its segment.

OUTPUT:

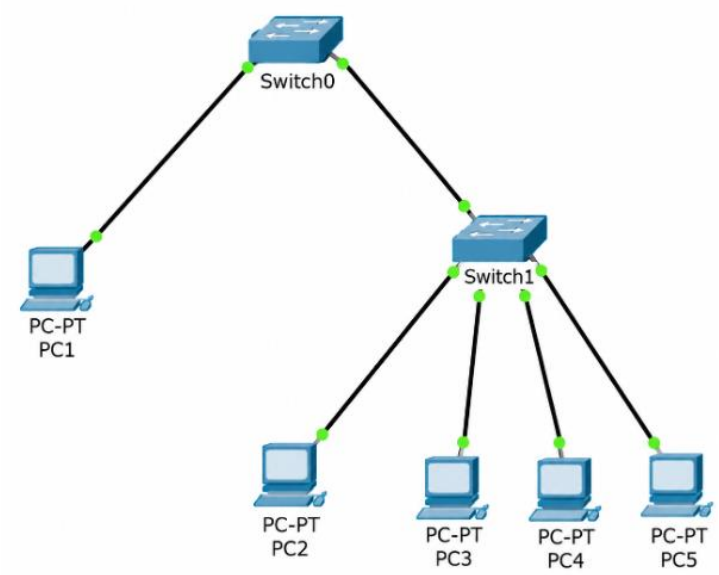
Switch0
Switch1
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
PC-PT
PC4
PC-PT
PC5

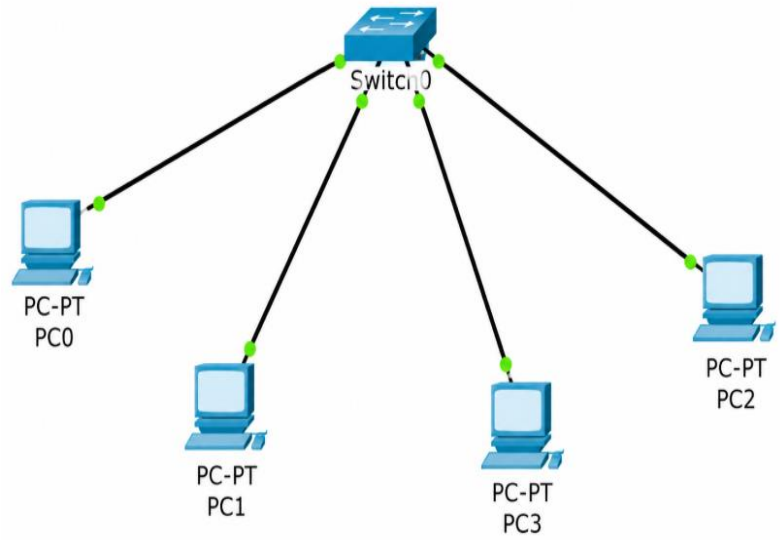
PC-PT
PC0
PC-PT
PC1
PC-PT
PC3
PC-PT
PC2

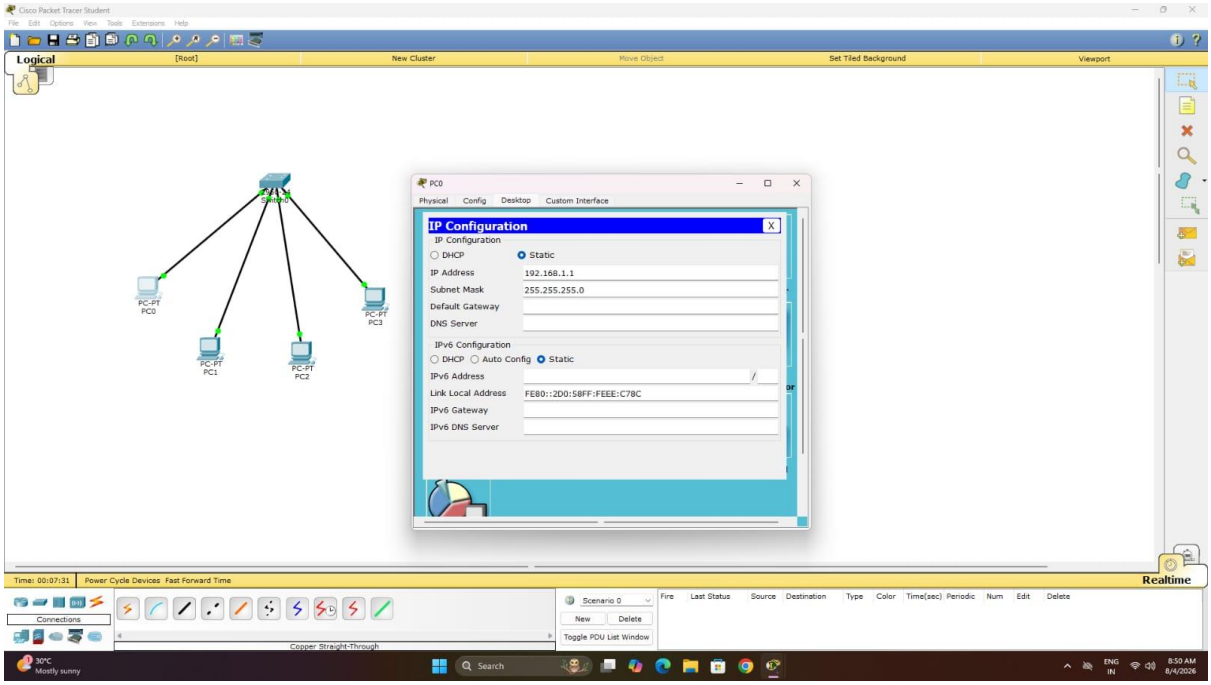

RESULT: Cisco Packet Tracer was successfully installed and studied.The behaviour and communication of various network devices were successfully analyzed using Cisco Packet Tracer.