GSM Global System for Mobile Commⁿ.

→ Cellular N/W.

→ operates in 4 diff. frequency ranges.

→ uses combination of both FDMA and TDMA.

→ Cell Sizes in GSM N/W.

- Macro :- BS antenna is installed.
- Micro :- antenna height < avg roof level
- Pico :- small cells (indoor) dia = (m)
- Umbrella :- Cover shadowed regions
  - → Fill in Gaps b/w cells.

GSM Features :-

1. International roaming
2. Good Voice Quality.
3. Handheld terminals Support.
4. Low service cost.
5. ISDN Compatibility.
6. New features and services.

GSM Architecture (IMP) 5 marks

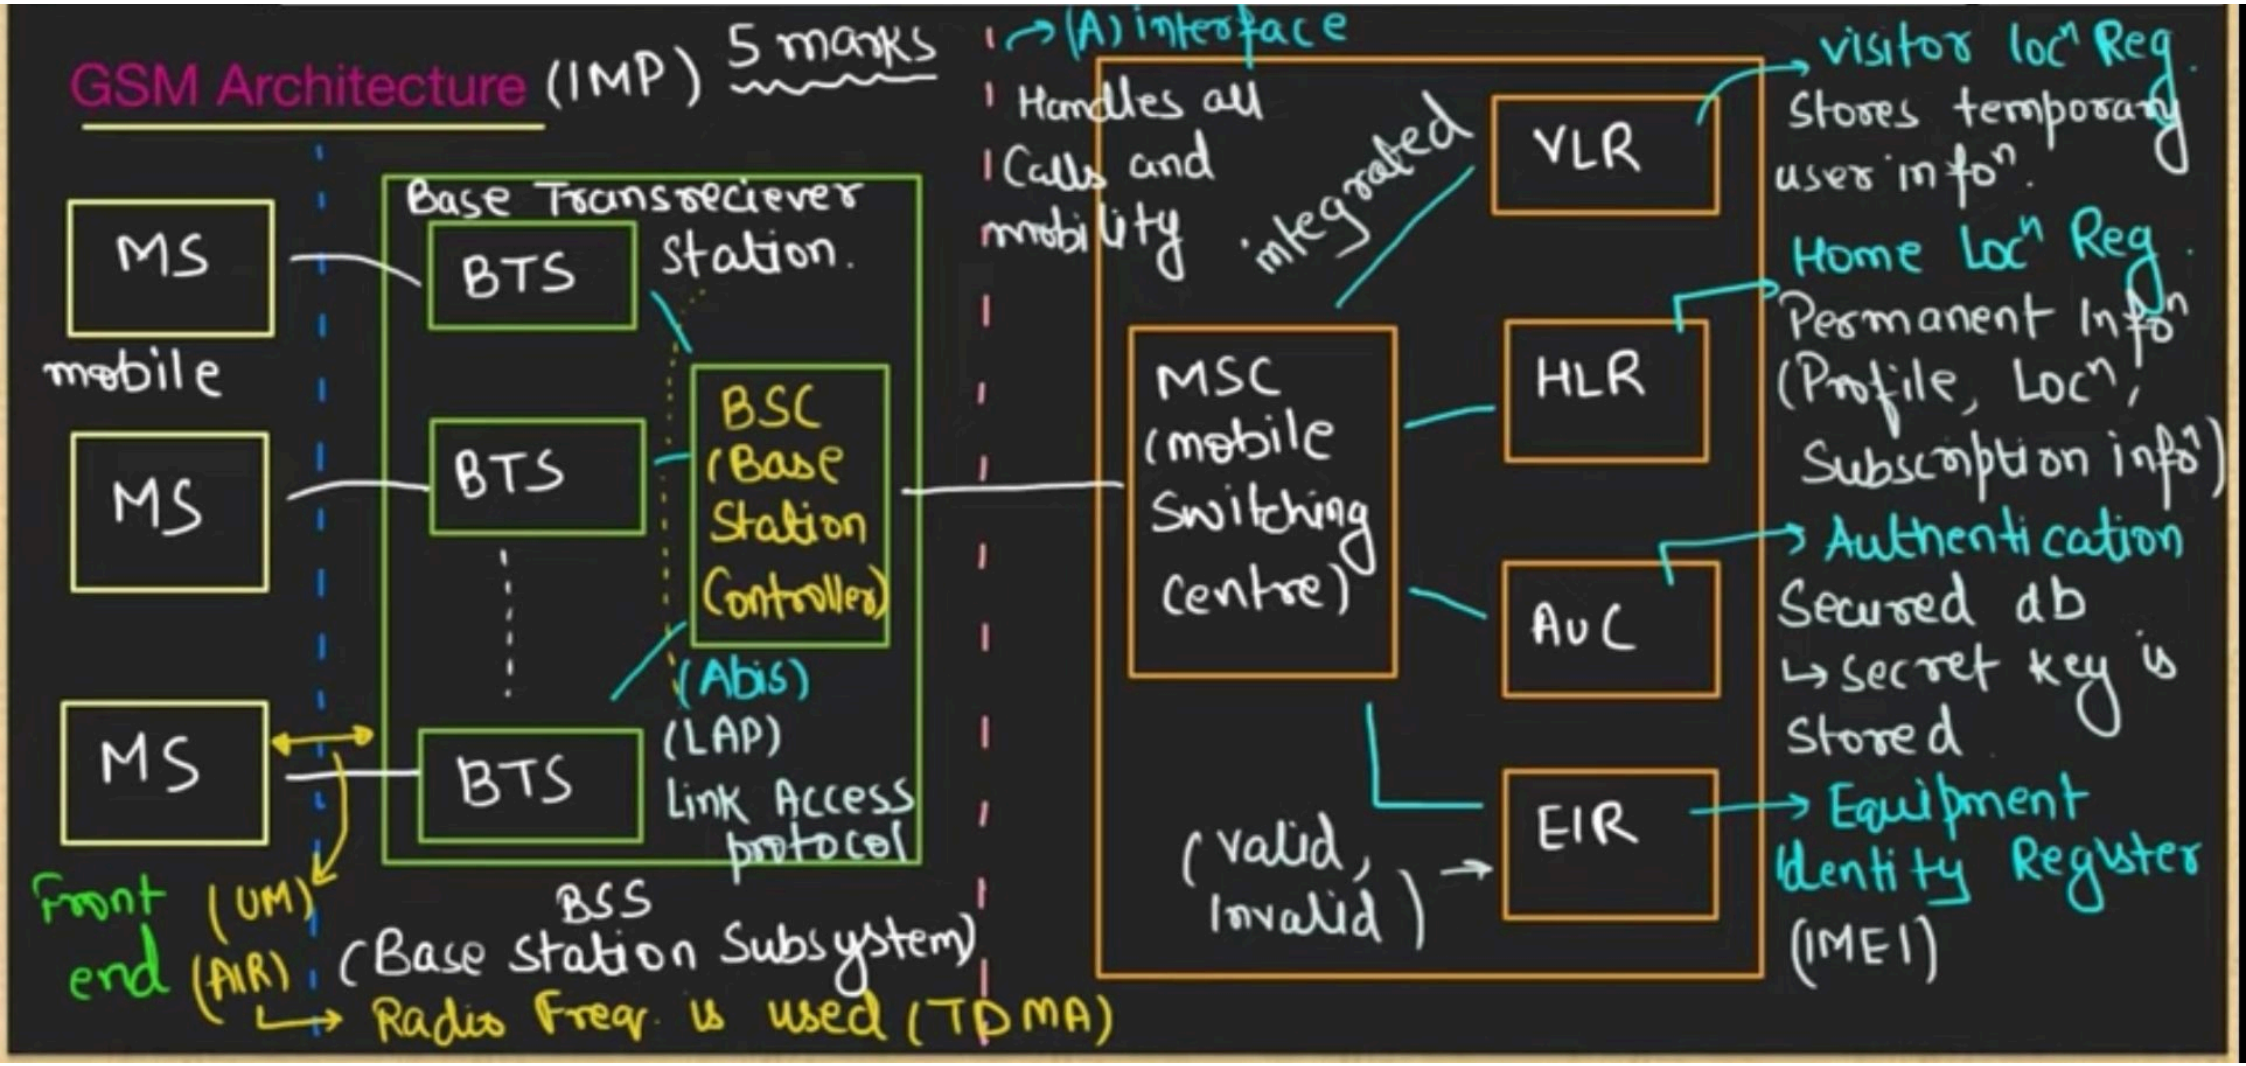

GSM Architecture Imp. Points:-

Component	Functions
BTS	Encoding, Encryption, multiplexing, modulation } Decoding, decryption
BSC	Frequency hoping Control, Traffic management, Interface, Power management, (Handoff management)
MSC (NSS) → n/w switching Subsystem	Registration, authentication, locn update, handover, Call routing, Call setup, Supervision