




Isolated RS485 interface

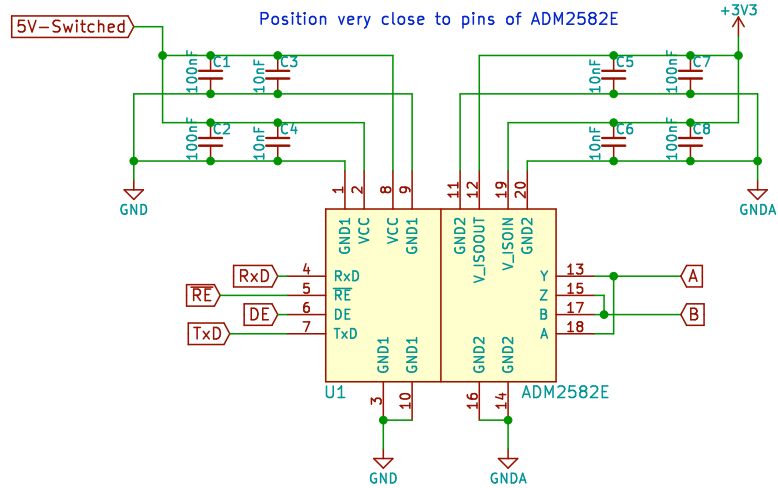


All GND pins should have enlarged pads in order to dissipate heat from component




Terminating resistor can be configured using jumper



USB interface

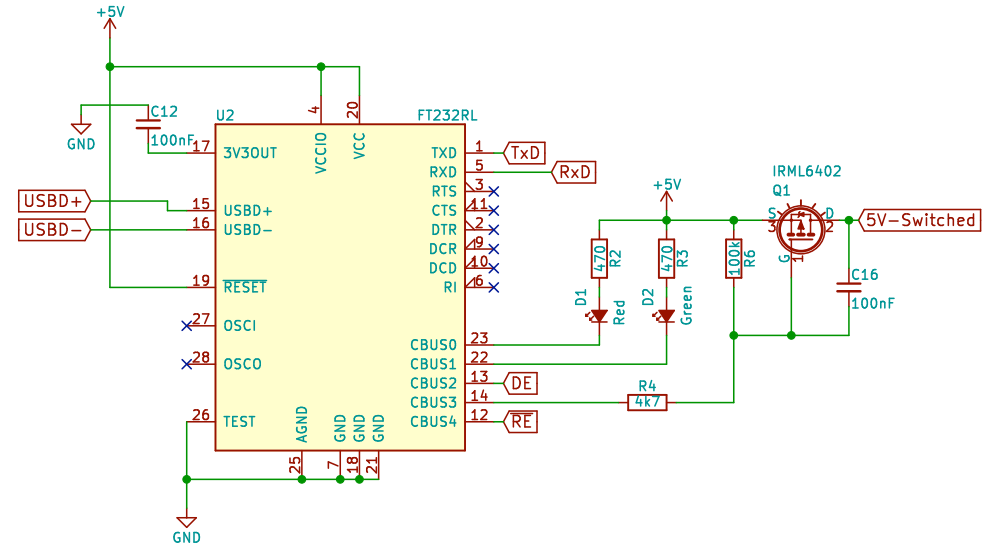

Don't populate R between Shield and GND. It's supposed to be used during EMI testing.

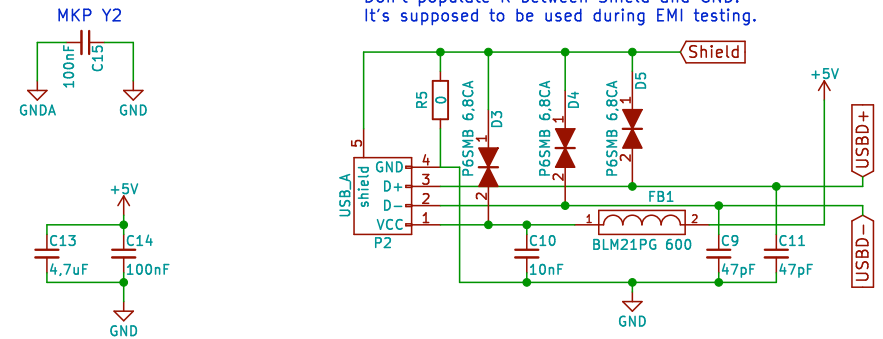

Isolated USB-RS485 interface

md@gonium.net

Sheet: /

File: USB-ISO-RS485.sch

Title: USB-ISO-RS485

Size: A4 Date: 2017-05-07

KiCad E.D.A. kicad 4.0.6

Rev: 0.1

Id: 1/1

Test points

