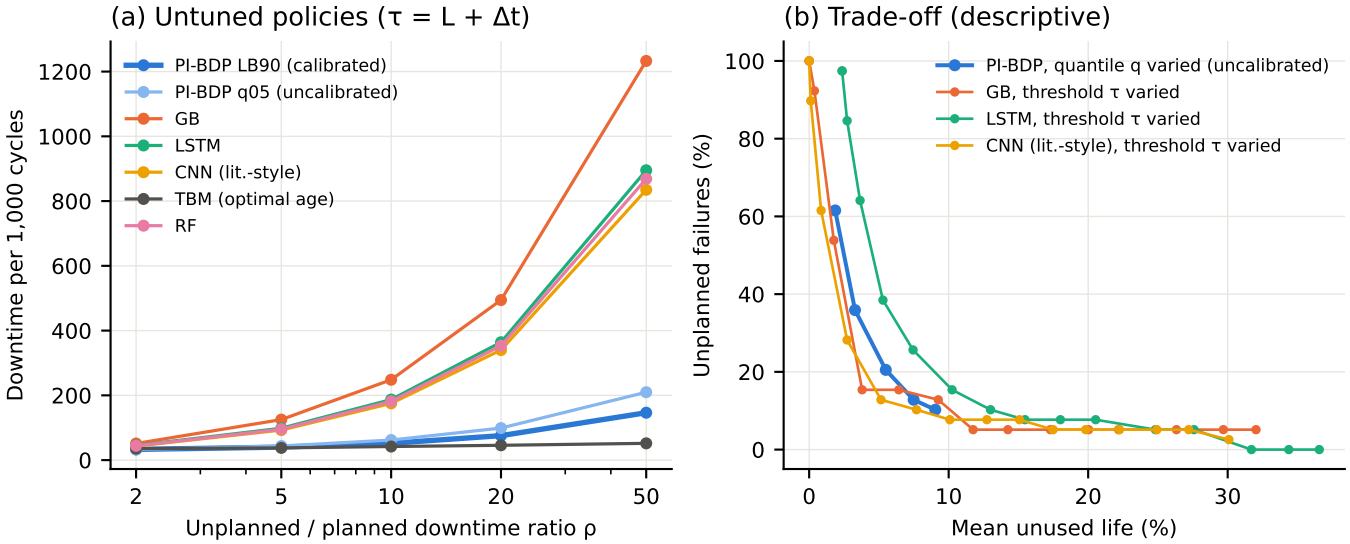
(a) Untuned policies (τ = L + Δt)
PI-BDP LB90 (calibrated)
PI-BDP q05 (uncalibrated)
GB
LSTM
CNN (lit.-style)
TBM (optimal age)
RF
Downtime per 1,000 cycles
0
200
400
600
800
1000
1200
2
5
10
20
50
Unplanned / planned downtime ratio ρ
(b) Trade-off (descriptive)
PI-BDP, quantile q varied (uncalibrated)
GB, threshold τ varied
LSTM, threshold τ varied
CNN (lit.-style), threshold τ varied
Unplanned failures (%)
0
20
40
60
80
100
0
10
20
30
Mean unused life (%)