

RESONANCE COMPENSATION STUDIES AT THE FNAL RECYCLER RING

By

Cristhian Gonzalez-Ortiz

A DISSERTATION

Submitted to
Michigan State University
in partial fulfillment of the requirements
for the degree of

Physics—Doctor of Philosophy

2024

ABSTRACT

Copyright by
CRISTHIAN GONZALEZ-ORTIZ
2024

ACKNOWLEDGEMENTS

Your acknowledgements here.

TABLE OF CONTENTS

LIST OF ABBREVIATIONS	vi
CHAPTER 1: INTRODUCTION	1
1.1: Basic Accelerator Elements	1
1.2: One-turn Map and Normal Form	3
1.3: Resonances in Circular Accelerators	5
1.4: Resonance Driving Terms	6
1.5: Space Charge Tune Shift	6
CHAPTER 2: THE FNAL RECYCLER RING	7
2.1: General Specifications	8
2.2: Tune Diagram and Resonances	10
2.3: High Intensity and Tune Footprint	11
CHAPTER 3: COMPENSATION OF THIRD-ORDER RESONANCES AT LOW INTENSITIES	12
3.1: Global RDTs and Lattice Model	12
3.2: Measurement of Third Order RDTs	12
3.3: Compensation of RDTs	12
3.4: Optimization of Compensation Currents	12
3.5: Experimental Verification of Compensation	12
CHAPTER 4: RESONANCE COMPENSATION STUDIES AT THE CERN PS BOOSTER	13
4.1: General specifications	13
4.2: Tune Diagram and Operation	13
4.3: Optimization Algorithms for Resonance Compensation	13
4.4: Experimental Verification of Compensation	13
CHAPTER 5: HIGH INTENSITY STUDIES	14
5.1: Global RDTs and Intensity-Dependent Effects	14
5.2: Space Charge Tune Shift	14
5.3: Measurement of Tune Shift	14
5.4: Static Tune Scans at Different Intensities	14
CHAPTER 6: CONCLUSIONS AND FUTURE WORK	15
BIBLIOGRAPHY	16
APPENDIX YOUR APPENDIX	17

LIST OF ABBREVIATIONS

MSU	Michigan State University
FNAL	Fermilab National Accelerator Laboratory
RR	Recycler Ring
MI	Main Injector
RDTs	Resonance Driving Terms
NuMI	Neutrinos at the Main Injector
PSB	CERN Proton Synchrotron Booster

CHAPTER 1

INTRODUCTION

The following thesis will explore the compensation of third-order resonances in the Fermilab Recycler Ring. Consequently, the structure of this work starts out by summarizing the dynamics of charged particles in a storage ring such as the RR. This first chapter summarizes single particle dynamics with the help of exponential Lie operators and moves forward to introduce a relevant concept of collective beam dynamics: the space charge tune shift. This theoretical overview gives segue into the second chapter of this thesis, where the Recycler Ring is introduced and described in detail. Motivation for the compensation of third order resonances is given in this chapter under the framework of current and future operation of the RR. With the basic physics concepts and the description of the machine put in place, the third chapter describes in full detail the scheme and experiments developed in order to compensate third order resonances at low intensities. Before moving to explore the Recycler Ring at high intensities, chapter four provides an interlude in order to show a series of experiments done at the CERN PS Booster. These experiments explore the use of advanced optimization algorithms in the aid of compensating multiple resonance lines simultaneously. Coming back to Fermilab, chapter five showcases the studies and experiments done at high intensities in the RR in order to understand the interplay between the compensation of resonance lines and space charge effects. Finally, chapter six brings down the curtain by providing some general conclusions and future work stemming from this thesis. For now, let this first chapter introduce some relevant concepts.

1.1 Basic Accelerator Elements

The most basic element of a particle accelerator can be thought of as a black box. This black box takes some single charged particle with initial transverse coordinates (x_0, x'_0, y_0, y'_0) , as defined in a Frenet-Serret coordinate system, and maps them to some final coordinates (x_f, x'_f, y_f, y'_f) . For simplicity, any longitudinal effect will not be taken into account for this analysis, but can be easily incorporated. By gathering the initial coordinates into a vector, i.e. $\vec{X}_0 = (x_0, x'_0, y_0, y'_0)$, and doing the same for the final coordinates, i.e., $\vec{X}_f = (x_f, x'_f, y_f, y'_f)$, one can define the mapping \mathcal{M} that

relates both vectors, such that:

$$\vec{X}_f = \mathcal{M}\vec{X}_0. \quad (1.1)$$

For a charged particle inside some accelerator element that can be described using Hamiltonian dynamics, the mapping \mathcal{M} can be understood in terms of Poisson brackets and exponential Lie operators [1–4].

Let $\vec{X} = (q_1, p_1, \dots, q_n, p_n)$ be a $2n$ dimensional vector, made from n pairs of canonical coordinates (q_i, p_i) that make up the $2n$ dimensional phase space. And let two arbitrary functions $f(\vec{X}; s)$ and $g(\vec{X}; s)$ be functions of \vec{X} and s , where s plays the role of the independent "time" coordinate. The Poisson brackets $[\bullet, \bullet]$ can be defined as:

$$[f, g] = \sum_{i=1}^n \frac{\partial f}{\partial q_i} \frac{\partial g}{\partial p_i} - \frac{\partial f}{\partial p_i} \frac{\partial g}{\partial q_i}. \quad (1.2)$$

Using this definition, one can explicitly write out the Poisson bracket definition for a 4 dimensional phase space described by state vector $\vec{X} = (x, x', y, y')$. This reads:

$$[f, g] = \frac{\partial f}{\partial x} \frac{\partial g}{\partial x'} - \frac{\partial f}{\partial x'} \frac{\partial g}{\partial x} + \frac{\partial f}{\partial y} \frac{\partial g}{\partial y'} - \frac{\partial f}{\partial y'} \frac{\partial g}{\partial y}. \quad (1.3)$$

The Lie operator $: f :$ acts on some function g and is the adjoint operator of the Poisson bracket operator. Its definition reads:

$$: f : g = [f, g]. \quad (1.4)$$

This specific $: \bullet :$ notation allows for a compact notation in order to define the exponential Lie operator. The exponential Lie operator of an arbitrary function f is defined as

$$e^{:f:} \bullet = \sum_{k=0}^{\infty} \frac{1}{k!} (: f :)^k \bullet. \quad (1.5)$$

It turns out that for a Hamiltonian system, the mapping of coordinates from \vec{X}_0 to \vec{X}_f follows the expression:

$$\vec{X}_f = e^{-\ell : H :} \vec{X} \Big|_{\vec{X}=\vec{X}_0}, \quad (1.6)$$

which is known as a Lie Map [2]. In this case, ℓ corresponds to the integration length of the independent coordinate. For example, for a particle traversing a magnet which has length L , the integration length is $\ell = L$. When looking at the one-turn map, the integration length corresponds to the circumference C of the accelerator over an effective Hamiltonian H_{eff} . Furthermore, if working with action-angle variables, the integration length ℓ would just be the phase advance μ .

1.2 One-turn Map and Normal Form

The one-turn map \mathcal{M}_1 of a circular accelerator is the composition (\circ) of mappings from every element in the ring. Choosing an arbitrary initial point at $s = 0$ and going around the ring, the one-turn map describes the transformation of coordinates after one turn, i.e., $\vec{X}_{N=1} = \mathcal{M}_1 \vec{X}_0$. This map composition reads:

$$\mathcal{M}_1 = M_{N+1} \circ e^{i h_N} \circ \dots \circ e^{i h_2} \circ M_2 \circ e^{i h_1} \circ M_1 = M_{N+1} e^{i h_N} \dots e^{i h_2} M_2 e^{i h_1} M_1, \quad (1.7)$$

where M_i is the matrix representation of a linear mapping, that does not couple $x - y$ plane, e.g., drift space mapping, quadrupole mapping. On the other hand, the map $e^{i h_i}$ represents any non-linear mapping that can be found around the machine including coupling elements, e.g., skew quadrupoles, higher order multipole elements.

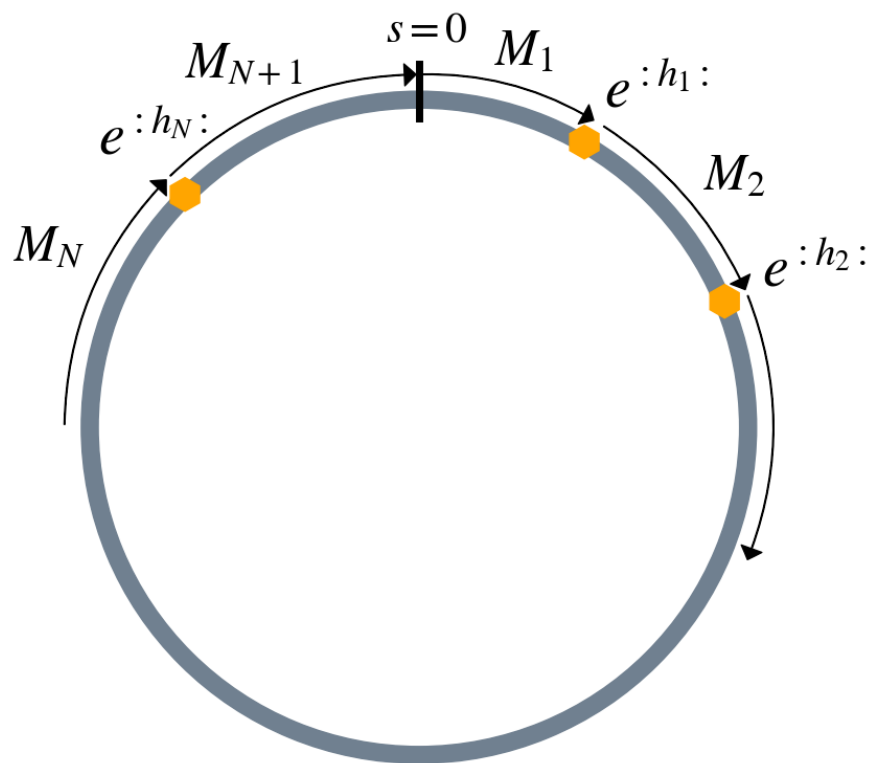


Figure 1.1 Diagram of an arbitrary circular accelerator in order to illustrate the one-turn map.

1.3 Resonances in Circular Accelerators

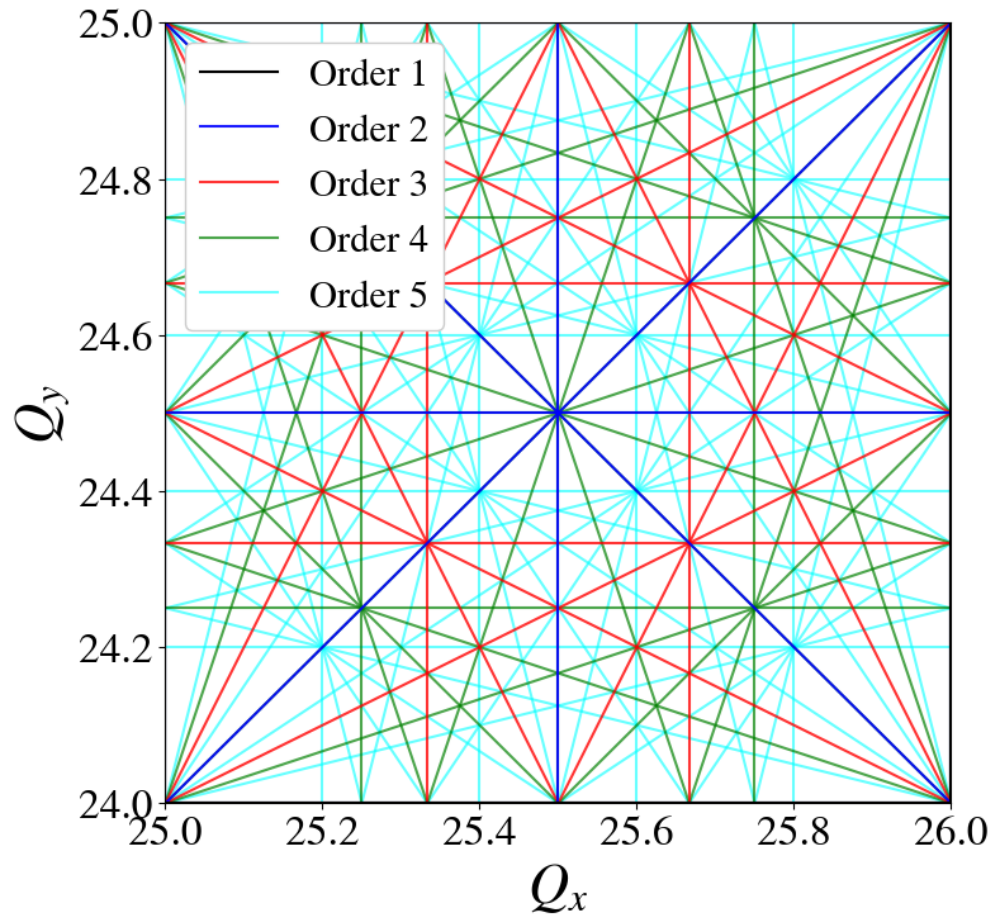


Figure 1.2 Tune diagram with resonance lines up to fifth order, enclosing the operation point of the Recycler Ring.

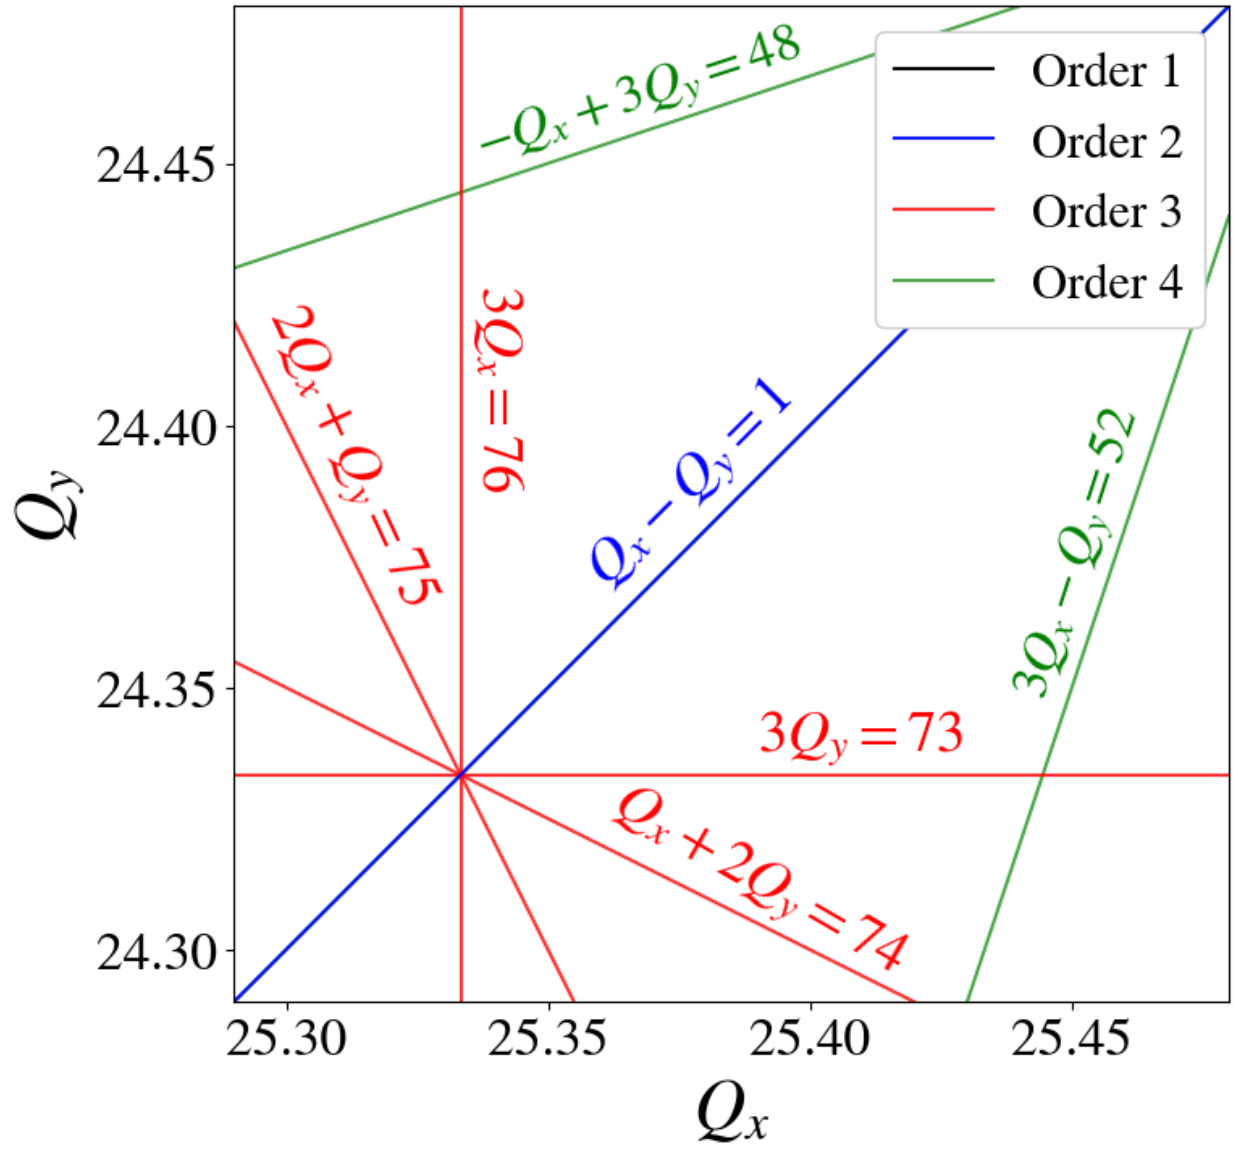


Figure 1.3 Portion of the tune diagram enclosing the operational tunes of the Recycler Ring.

1.4 Resonance Driving Terms

1.5 Space Charge Tune Shift

CHAPTER 2

THE FNAL RECYCLER RING

The Fermilab Recycler Ring (RR) is one of the circular accelerators located in the Fermilab Accelerator Complex. It was originally designed to store and accumulate antiprotons that remained from a Tevatron event [5]. The recycling of antiprotons was deemed ineffective and was never operationally implemented [6]. Since 2011, the RR has been repurposed to act as a pre-injector to the Main Injector (MI) by storing and accumulating protons [7]. It is worth pointing out, that the MI and the RR share the same tunnel, which has a circumference of 3.319 km (2.062 mi).

The MI/RR complex is fed protons by the Proton Source, which by itself consists of the Pre-Accelerator, the Linear Accelerator (Linac), and the Booster. The Pre-Accelerator systems provide H^- ions to the Linac, where they are accelerated to an energy of 400 MeV. After this, the beam is injected into the Booster, which is a rapid-cycling synchrotron operating at a 15 Hz repetition rate. During this injection process, the H^- beam passes through a carbon stripping foil, and it incorporates to the circulating proton beam. The Booster ramps the energy up from 400 MeV to 8 GeV. This 8 GeV proton beam can either go to the Booster Neutrino Experiments or get injected into the Recycler Ring. Once in RR the beam has two possible destinations: 1) high energy neutrino experiments through MI or 2) Muon Campus. For the latter, proton beam gets rebunched from 53 MHz to 2.5 MHz and transported to Muon Campus. For high energy neutrino experiments, the proton beam gets slip-stacked, hence doubling the intensity that gets injected into Main Injector. Once in MI, the beam is accelerated to 120 GeV and sent to the NuMI (Neutrinos at the Main Injector) beam facility [6–8]. A description of the accelerator complex is shown in figure 2.1, including the experimental beamlines which feed neutrino, muon and fixed target experiments.

The work done for this thesis focuses on the Recycler Ring. The following chapter starts by giving a general description for the operation and physics of the Recycler Ring. The next sections introduce and motivate the compensation of third order resonances for high intensity operation.

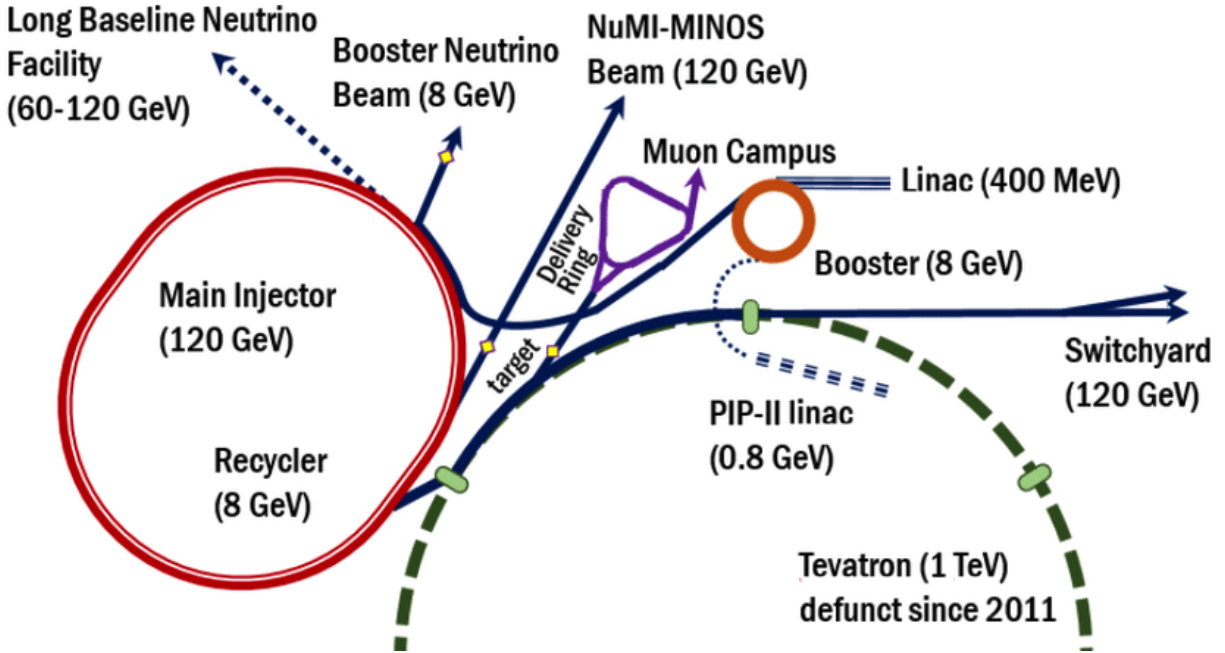


Figure 2.1 The past (Tevatron), present and future (PIP-II and LBNF) of the FNAL Accelerator Complex, taken from [3].

2.1 General Specifications

The RR is a permanent magnet storage ring operating at a fixed momentum of 8.835 GeV/c. [9]

[10]

Table 2.1 Typical Recycler Ring properties for beam sent to NuMI

Parameter	Value	Unit
Circumference	3319	m
Momentum	8.835	GeV/c
RF Frequency	52.8	MHz
RF Voltage	80	kV
Harmonic Number	588	
Synchrotron Tune	0.0028	
Slip Factor	-8.6×10^{-3}	
Superperiodicity	2	
Horizontal Tune	25.43	
Vertical Tune	24.445	
Horizontal Chromaticity	-6	
Vertical Chromaticity	-7	
95% Normalized Emittance	15	π mm mrad
95% Longitudinal Emittance	0.08	eV s
Intensity	$5 \times 10^{10}, 8 \times 10^{10}$ (PIP-II)	ppb
MI Ramp Time	1.333, 1.133, 1.067	s
Booster Frequency	15, 20 (PIP-II)	Hz

2.2 Tune Diagram and Resonances

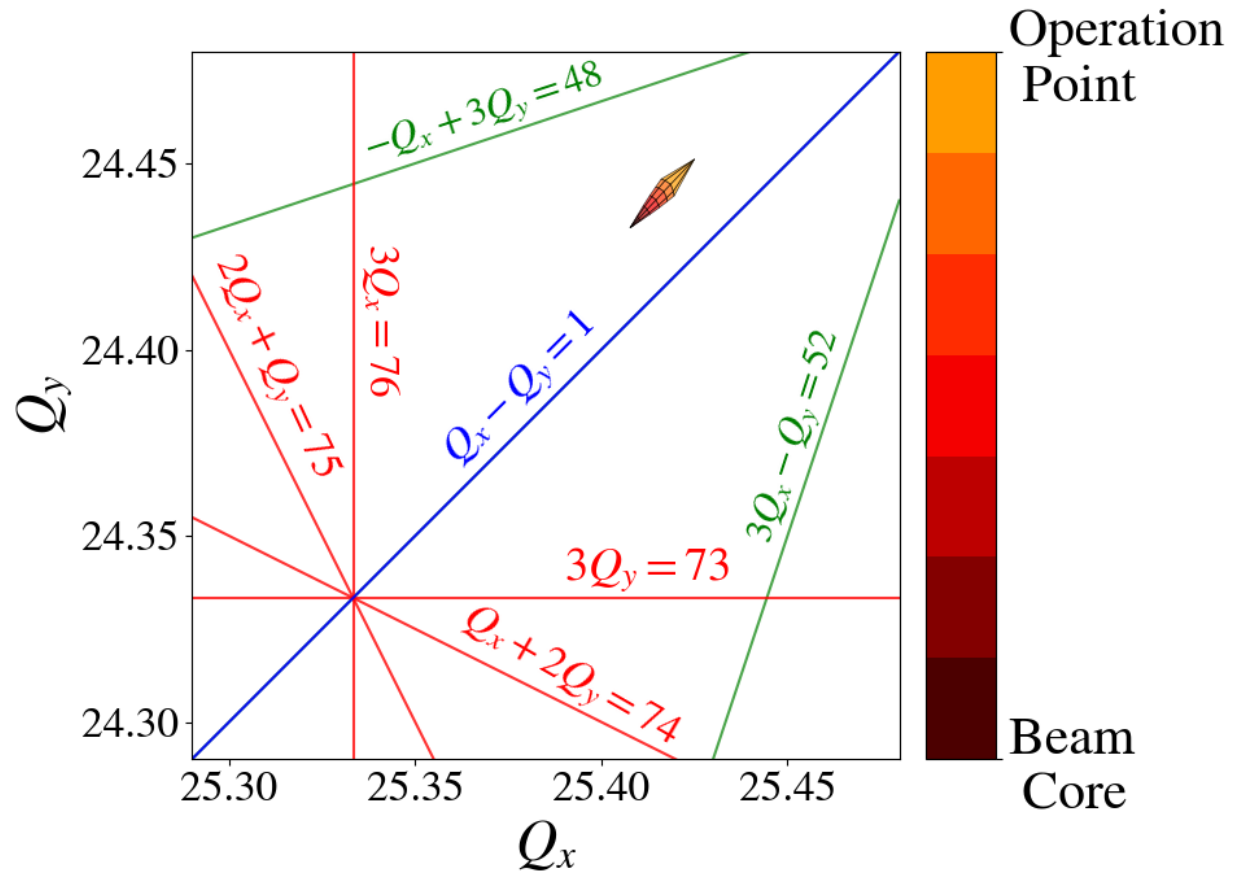


Figure 2.2 Approximate operational tune footprint at low intensities, i.e., $1e10$ particles per bunch.

2.3 High Intensity and Tune Footprint

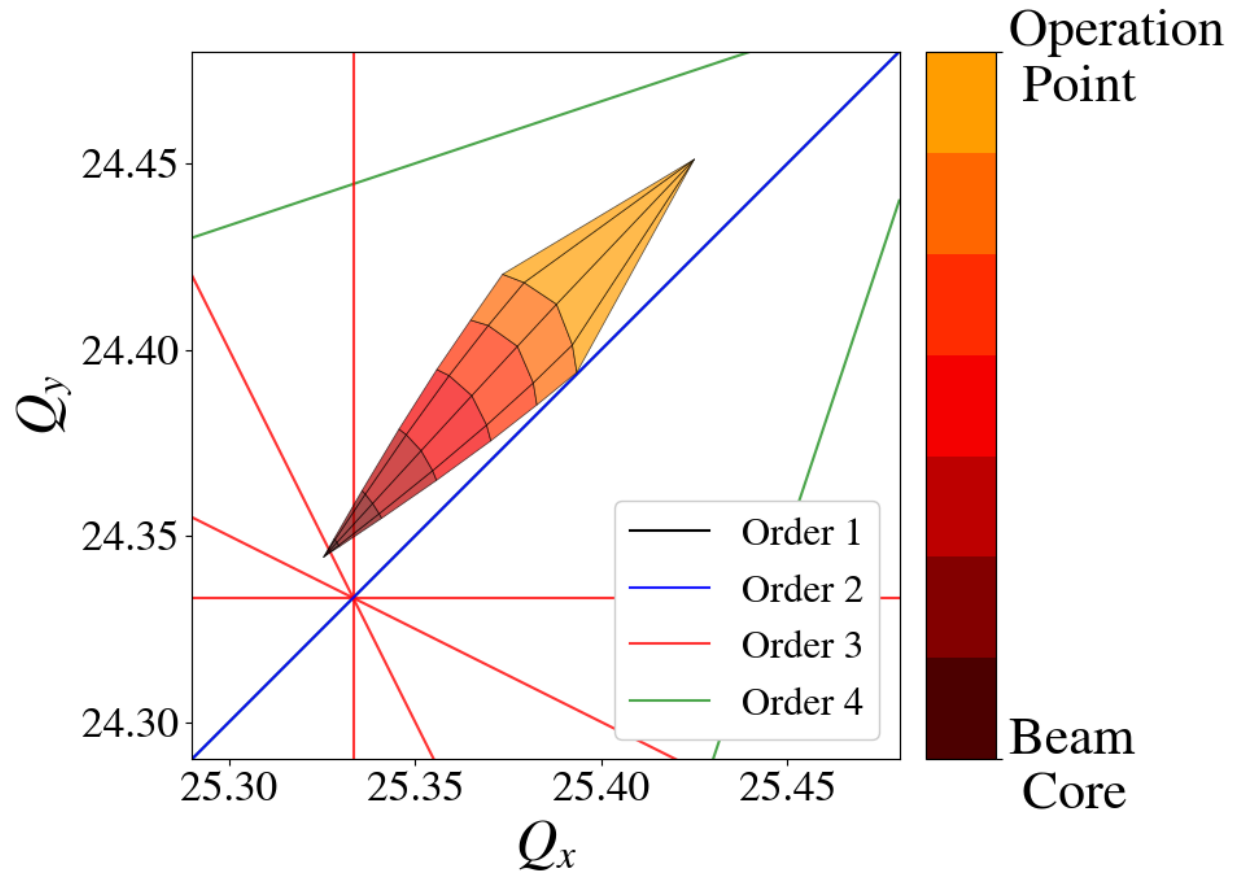


Figure 2.3 Approximate operational tune footprint at high intensities, i.e., $1e11$ particles per bunch.

CHAPTER 3

COMPENSATION OF THIRD-ORDER RESONANCES AT LOW INTENSITIES

3.1 Global RDTs and Lattice Model

3.2 Measurement of Third Order RDTs

3.3 Compensation of RDTs

3.4 Optimization of Compensation Currents

3.5 Experimental Verification of Compensation

3.5.1 Dynamic Loss Map

3.5.2 Static Tune Scans

CHAPTER 4

RESONANCE COMPENSATION STUDIES AT THE CERN PS BOOSTER

4.1 General specifications

4.2 Tune Diagram and Operation

4.3 Optimization Algorithms for Resonance Compensation

4.4 Experimental Verification of Compensation

CHAPTER 5

HIGH INTENSITY STUDIES

5.1 Global RDTs and Intensity-Dependent Effects

5.2 Space Charge Tune Shift

5.3 Measurement of Tune Shift

5.4 Static Tune Scans at Different Intensities

CHAPTER 6

CONCLUSIONS AND FUTURE WORK

BIBLIOGRAPHY

- [1] Andrzej Wolski. *Beam Dynamics in High Energy Particle Accelerators*. 2nd. WORLD SCIENTIFIC, 2023. DOI: 10.1142/13333. eprint: <https://www.worldscientific.com/doi/pdf/10.1142/13333>. URL: <https://www.worldscientific.com/doi/abs/10.1142/13333>.
- [2] T. Satogata. *Lecture Notes on Poisson Brackets and Lie Operators*. <https://toddsatogata.net/2011-USPAS/lieAlgebras.pdf>. Jan. 2008.
- [3] P. Urschutz. “Measurement and Compensation of Betatron Resonances at the CERN PS Booster Synchrotron”. PhD thesis. Vienna, Austria, 2004.
- [4] R. Tomas Garcia. “Direct Measurement of Resonance Driving Terms in the Super Proton Synchrotron (SPS) of CERN using Beam Position Monitors”. PhD thesis. Valencia, Spain, Jan. 2003.
- [5] G. Jackson. *The Fermilab recycler ring technical design report. Revision 1.2*. Tech. rep. FNAL-TM-1991ON: DE97051388; BR: KAHEP. Fermilab, Nov. 1996. DOI: 10.2172/16029. URL: <https://www.osti.gov/biblio/16029>.
- [6] S. Nagaitsev. *Fermilab Antiproton source, Recycler ring and Main Injector*. Tech. rep. FERMILAB-FN-0957-AD. Fermilab, Mar. 2013. DOI: 10.2172/1127965. URL: <https://www.osti.gov/biblio/1127965>.
- [7] R. Ainsworth et al. “High intensity operation using proton stacking in the Fermilab Recycler to deliver 700 kW of 120 GeV proton beam”. In: *Phys. Rev. Accel. Beams* 23 (12 Dec. 2020), p. 121002. DOI: 10.1103/PhysRevAccelBeams.23.121002. URL: <https://link.aps.org/doi/10.1103/PhysRevAccelBeams.23.121002>.
- [8] P. Adamson et al. “The NuMI neutrino beam”. In: *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment* 806 (2016), pp. 279–306. ISSN: 0168-9002. DOI: <https://doi.org/10.1016/j.nima.2015.08.063>. URL: <https://www.sciencedirect.com/science/article/pii/S016890021501027X>.
- [9] M. Ball et al. *The PIP-II Conceptual Design Report*. Tech. rep. FERMILAB-TM-2649-AD-APC1516858. Fermilab, Mar. 2017. DOI: 10.2172/1346823. URL: <https://www.osti.gov/biblio/1346823>.
- [10] R. Ainsworth et al. “High intensity space charge effects on slip stacked beam in the Fermilab Recycler”. In: *Phys. Rev. Accel. Beams* 22 (2 Feb. 2019), p. 020404. DOI: 10.1103/PhysRevAccelBeams.22.020404. URL: <https://link.aps.org/doi/10.1103/PhysRevAccelBeams.22.020404>.

APPENDIX
YOUR APPENDIX