


ISOMETRIC AIR DUCT TO SYNGAS BURNER (X-201)

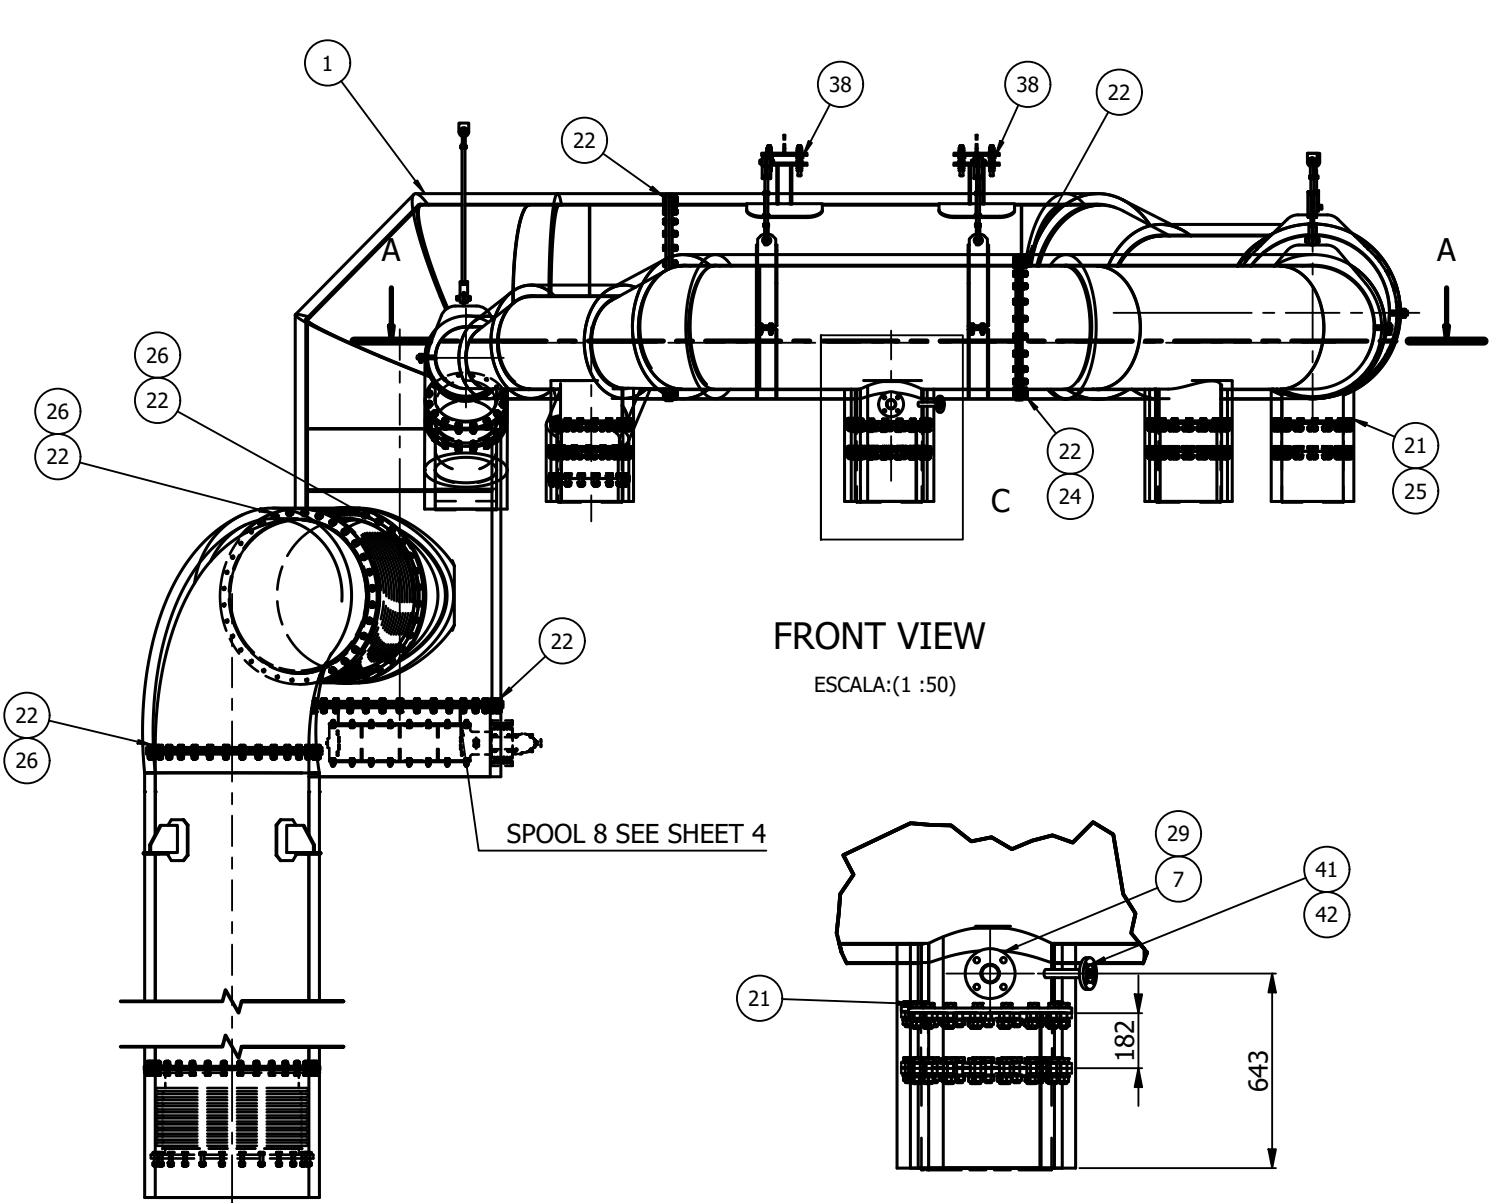


FRONT VIEW

ESCALA:(1 :50)


DETAIL C

ESCALA:(1 : 25)

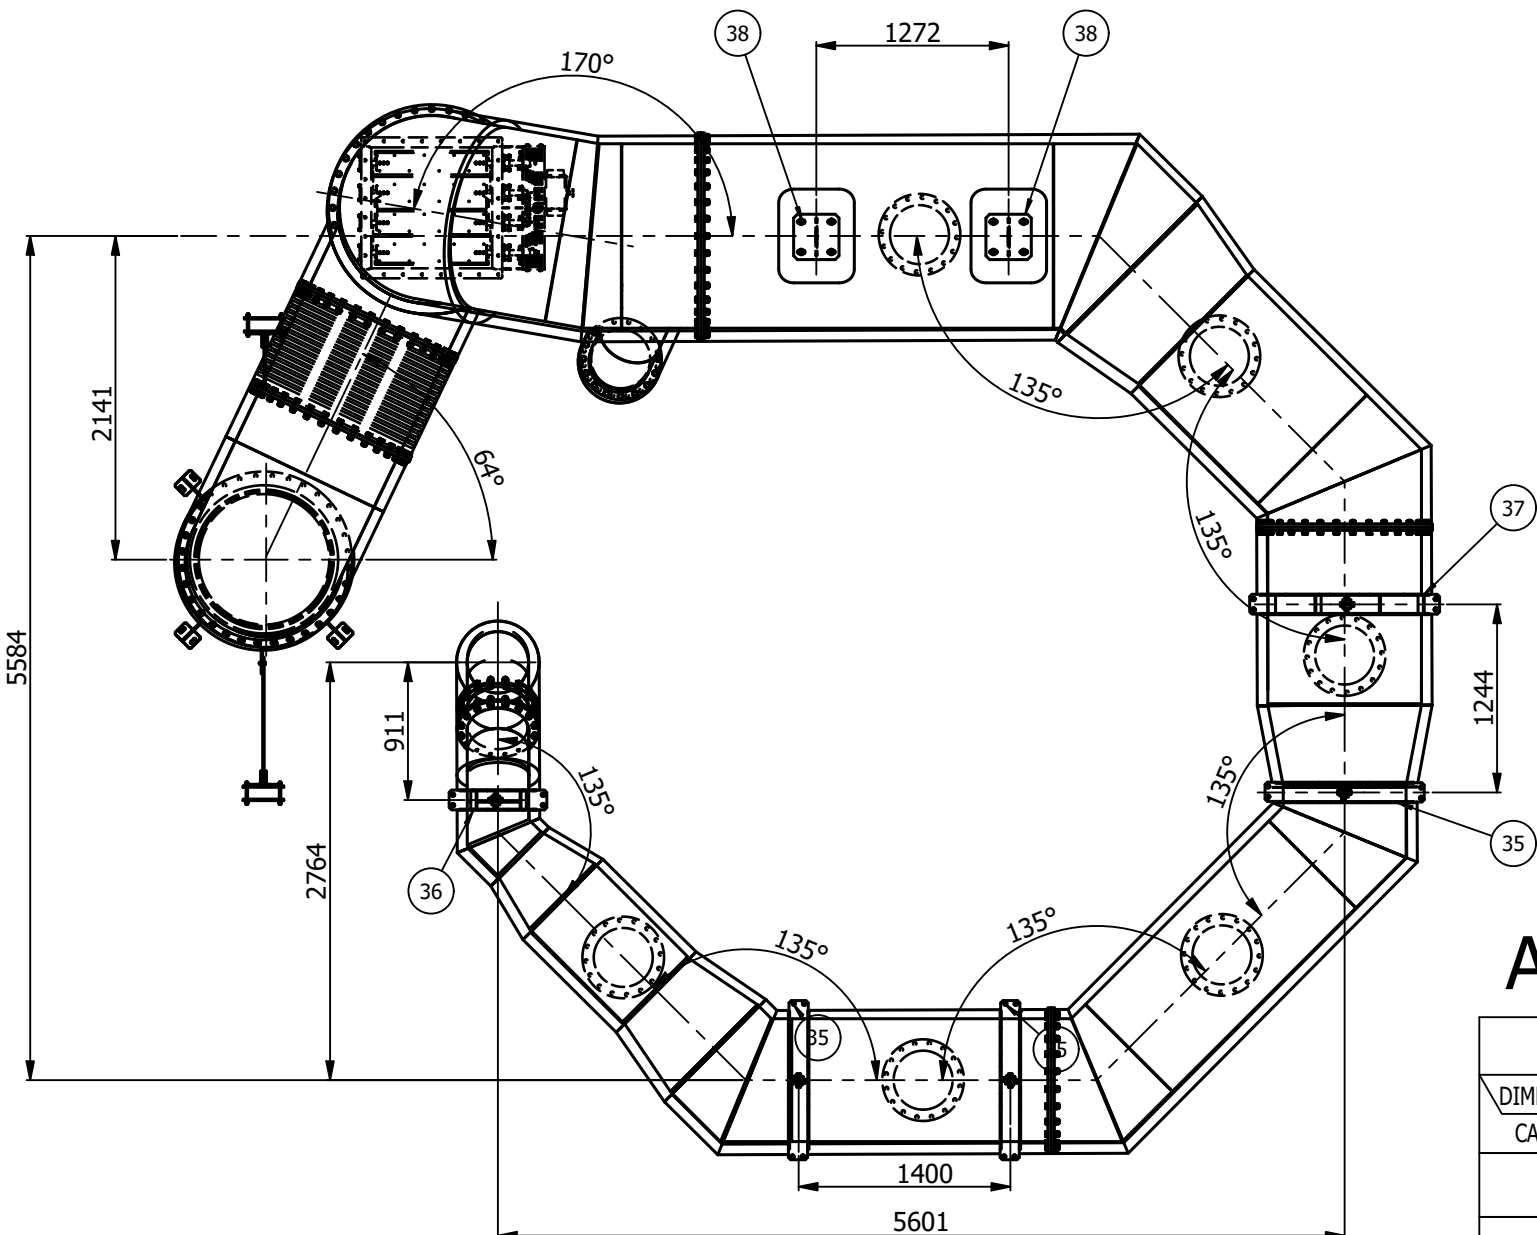


TOP VIEW

ESCALA:(1 :50)

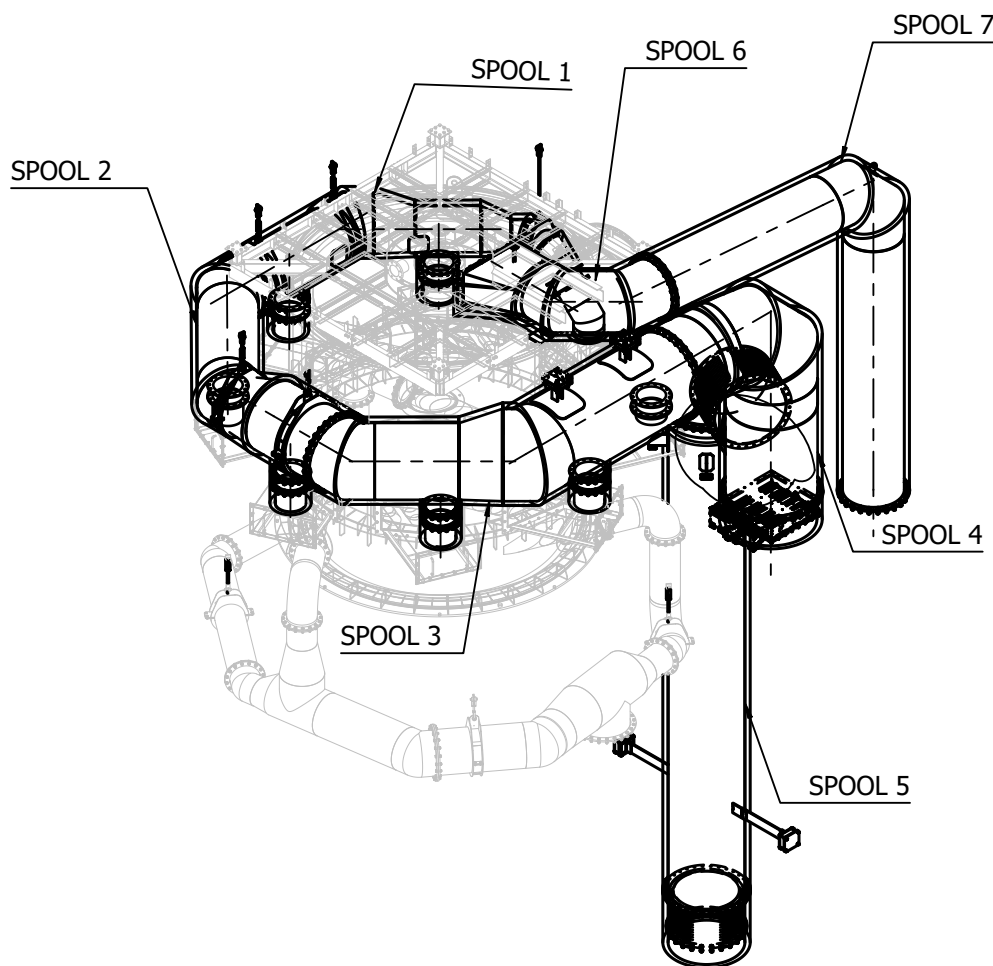

ISOMETRIC VIEW

ESCALA:(1: 100)

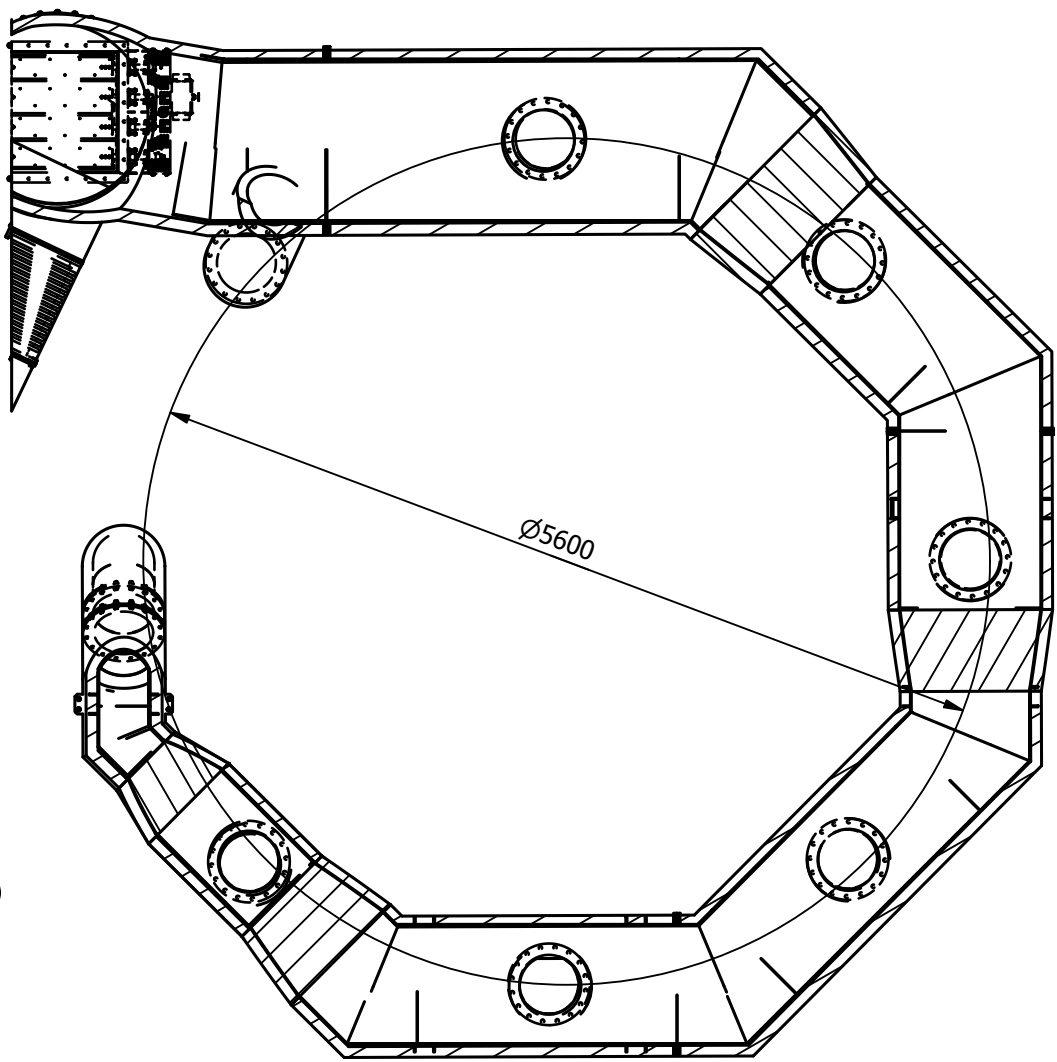

CUTA-A

ESCALA:(1 :50)


APPROXIMATE WEIGHT : 5200 Kg

TOLERANCIAS PARA CALDERERÍA - DIN 8570 (ISO 13920)											
DIMENSIONES CALIDAD	>2 a 30	>30 a 120	>120 a 400	>400 a 1000	>1000 a 2000	>2000 a 4000	>4000 a 8000	>8000 a 12000	>12000 a 16000	>16000 a 20000	>20000 —
B	± 1	± 2	± 2	± 3	± 4	± 6	± 8	± 10	± 12	± 14	± 16
FORMA Y POSICIÓN	TOL. DIMEN.	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	>2000 a 4000	>4000 a 8000	>8000 a 12000	>12000 a 16000	>16000 a 20000	>20000 a 40000
		± 1.5	± 3	± 5.5	± 9	± 11	± 16	± 20	± 13 mm/m	± 9 mm/m	± 6 mm/m


ITEM	DESCRIPCION	CANT.	MATERIAL
42	PIPE DN 20 P-10 THIKNESS 2 mm	1	AISI 304 L stainless steel EN 1.4307
41	BRIDA DN20 EN 1092-1 TIP12 PN-40	1	AISI 304 L stainless steel EN 1.4307
40	PIPE DN 1200 Thickness= 5 mm	1	AISI 304 L stainless steel EN 1.4307
39	TEE 1200 RED 1000	1	AISI 310 S EN 1.4845 stainless steel
38	SP-05 SEE SHEET 4	2	AISI 304 L stainless steel EN 1.4307
37	SP-03 SEE STD-100-M-PP-DN-001 L= 302 mm	1	AISI 304 L stainless steel EN 1.4307
36	SP-02 SEE STD-100-M-PP-DN-001 L= 902 mm	1	AISI 304 L stainless steel EN 1.4307
35	SP-01 SEE STD-100-M-PP-DN-001 L= 505.5 mm	3	AISI 304 L stainless steel EN 1.4307
34	GUIDE SUPPORT	2	AISI 310 S EN 1.4845 stainless steel
33	DUCT SUPPORT	4	AISI 310 S EN 1.4845 stainless steel
32	Eccentric reduction DN1000x800	2	AISI 304 L stainless steel EN 1.4307
31	Eccentric reduction DN800x600	1	AISI 304 L stainless steel EN 1.4307
30	Eccentric reduction DN600x400	1	AISI 304 L stainless steel EN 1.4307
29	PIPE DN 50 P-10 THIKNESS 3 mm	1	-
28	JOINT RECTANGULAR	2	Fibro-ceramic tape 3 mm thickness
27	JOINT DN1200	2	Fibro-ceramic tape 3 mm thickness
26	JOINT DN1000	5	Fibro-ceramic tape 3 mm thickness
25	JOINT DN400	16	Fibro-ceramic tape 3 mm thickness
24	JOINT DN 800	1	Fibro-ceramic tape 3 mm thickness
23	RECTANGULAR DUCT	1	AISI 310 S EN 1.4845 stainless steel
22	Washer nut screw set DN1000	280	DIN EN ISO 4017 M20 x 70/DIN 125-2 A A 21/DIN 934 - M20 x 2
21	Washer nut screw set DN600	262	DIN EN ISO 4017 M20 x 70/DIN 125-2 A A 21/DIN 934 - M20 x 2
20	Elbow 170° DN1200	1	AISI 310 S EN 1.4845 stainless steel
19	Elbow 135° DN1200	1	AISI 304 L stainless steel EN 1.4307
18	Elbow 135° DN1000	1	AISI 304 L stainless steel EN 1.4307
17	Elbow 135° DN800	3	AISI 304 L stainless steel EN 1.4307
16	Elbow 135° DN400	3	AISI 304 L stainless steel EN 1.4307
15	Elbow 90° DN1200	1	AISI 310 S EN 1.4845 stainless steel
14	PIPE DN 1200 Thickness= 5 mm	2	AISI 310 S EN 1.4845 stainless steel
13	PIPE DN 1000 Thickness= 5 mm	1	AISI 310 S EN 1.4845 stainless steel
12	PIPE DN 1000 Thickness= 5 mm	2	AISI 304 L stainless steel EN 1.4307
11	PIPE DN 800 Thickness= 5 mm	2	AISI 304 L stainless steel EN 1.4307
10	PIPE DN 600 Thickness= 5 mm	1	AISI 304 L stainless steel EN 1.4307
9	PIPE DN 400 Thickness= 5 mm	8	AISI 304 L stainless steel EN 1.4307
8	RECTANGULAR FLANGE VALVE	1	AISI 310 S EN 1.4845 stainless steel
7	FLANGE DN50 EN 1092-1 TYPE 1-A PN-10	1	AISI 304 L stainless steel EN 1.4307
6	FLANGE DN 1200 DIN-86044 (2 SLIP ON)	4	AISI 310 S EN 1.4845 stainless steel
5	FLANGE DN 1000 DIN-86044	2	AISI 304 L stainless steel EN 1.4307
4	SLIP- ON FLANGE DN 1000 DIN-86044	5	AISI 310 S EN 1.4845 stainless steel
3	FLANGE DN 800 DIN-86044	2	AISI 304 L stainless steel EN 1.4307
2	FLANGE DN 400 DIN-86044	8	AISI 304 L stainless steel EN 1.4307
1	Duct Insulation Aluminized Flat sheet: thickness 0.8 mm 1 -Rock wool THK.: 70 mm	1	Flat sheet: thickness 0.8 mm 1 -Rock wool THK.: 70 mm

LISTA DE MATERIALES




SPOOL 1

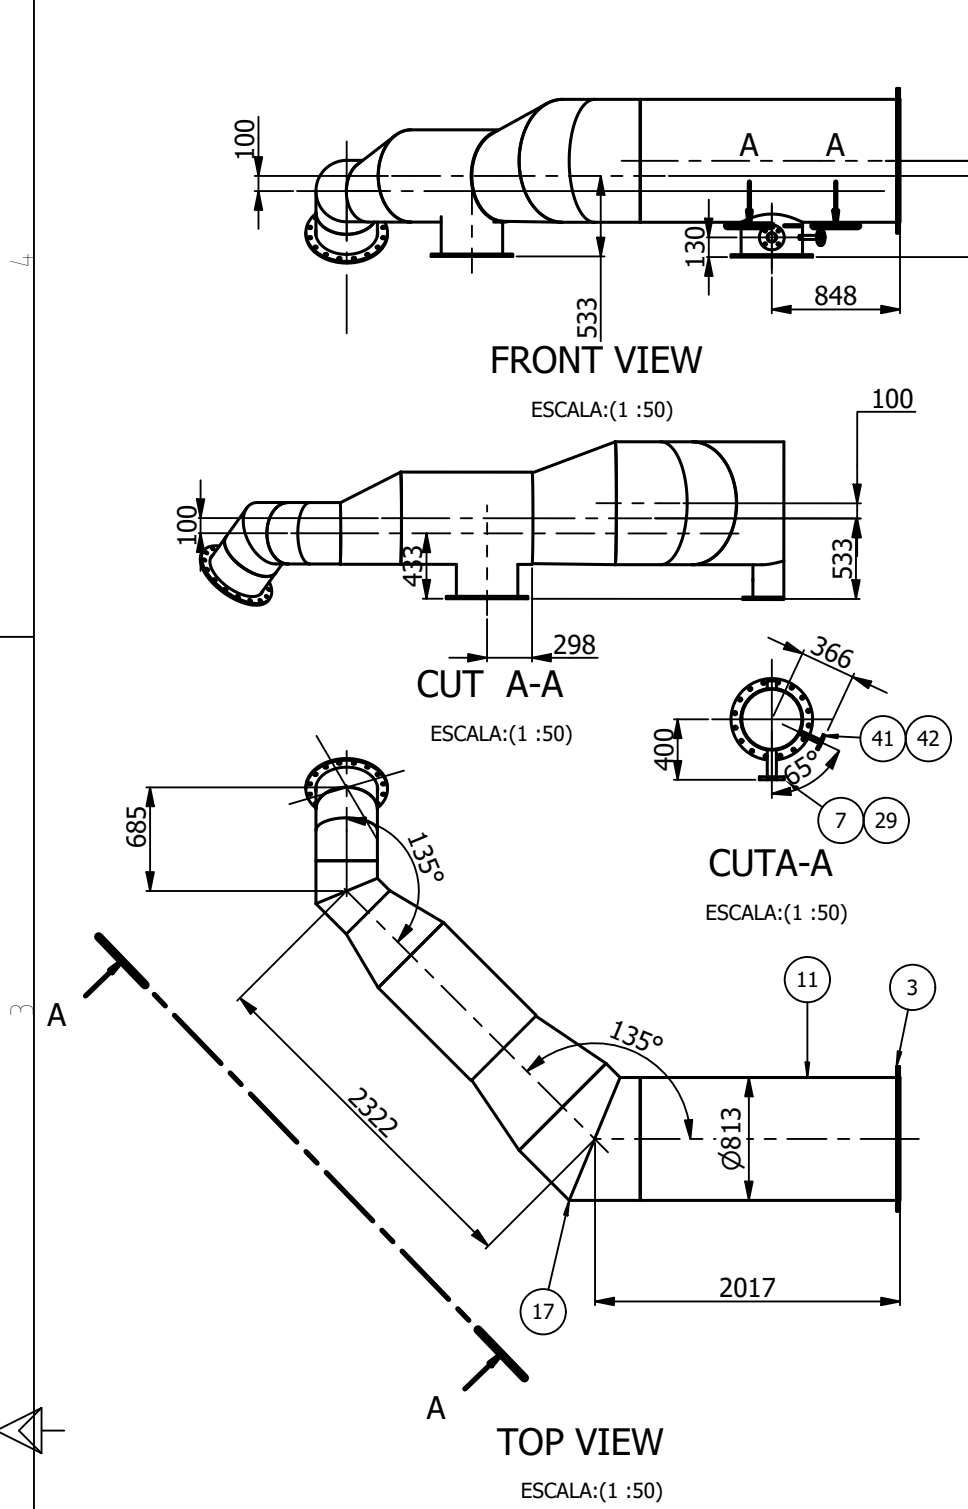



SPOOL 3

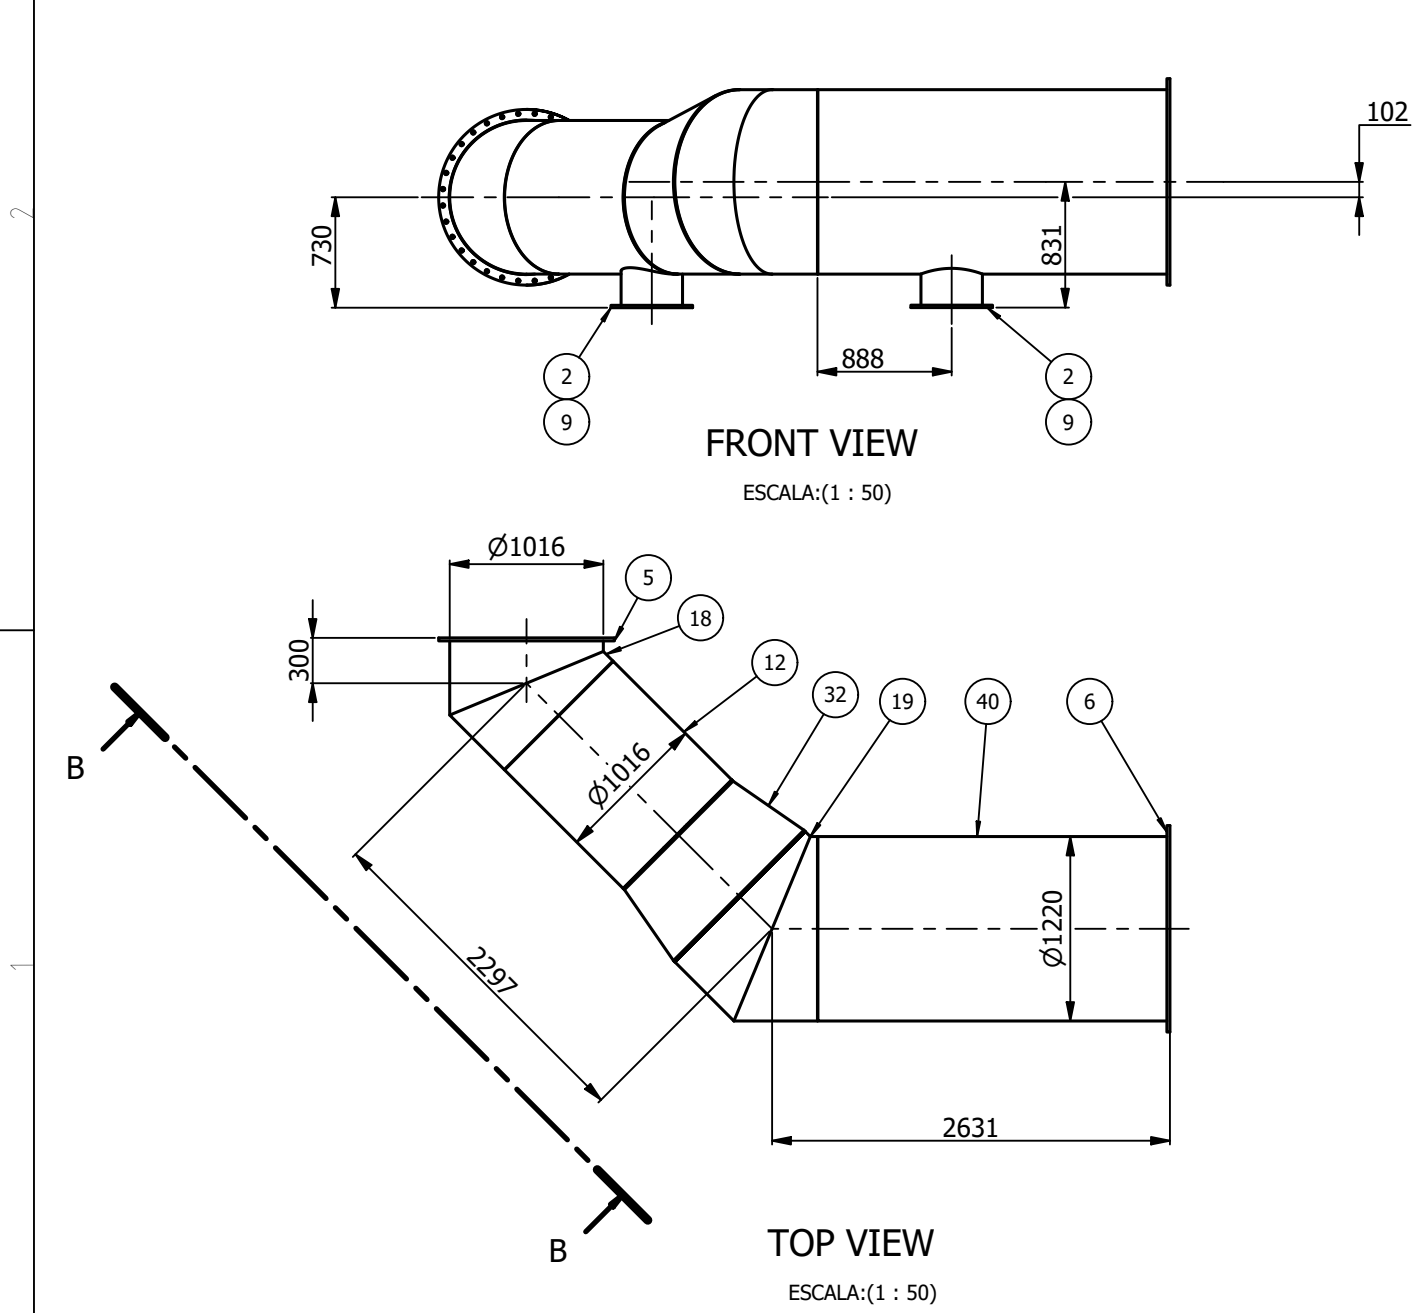

SPOOL 5

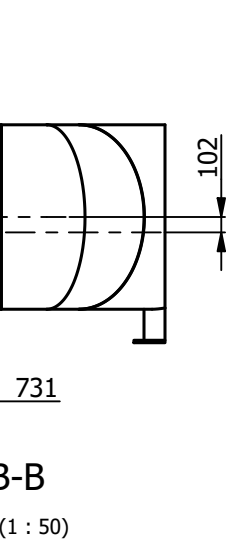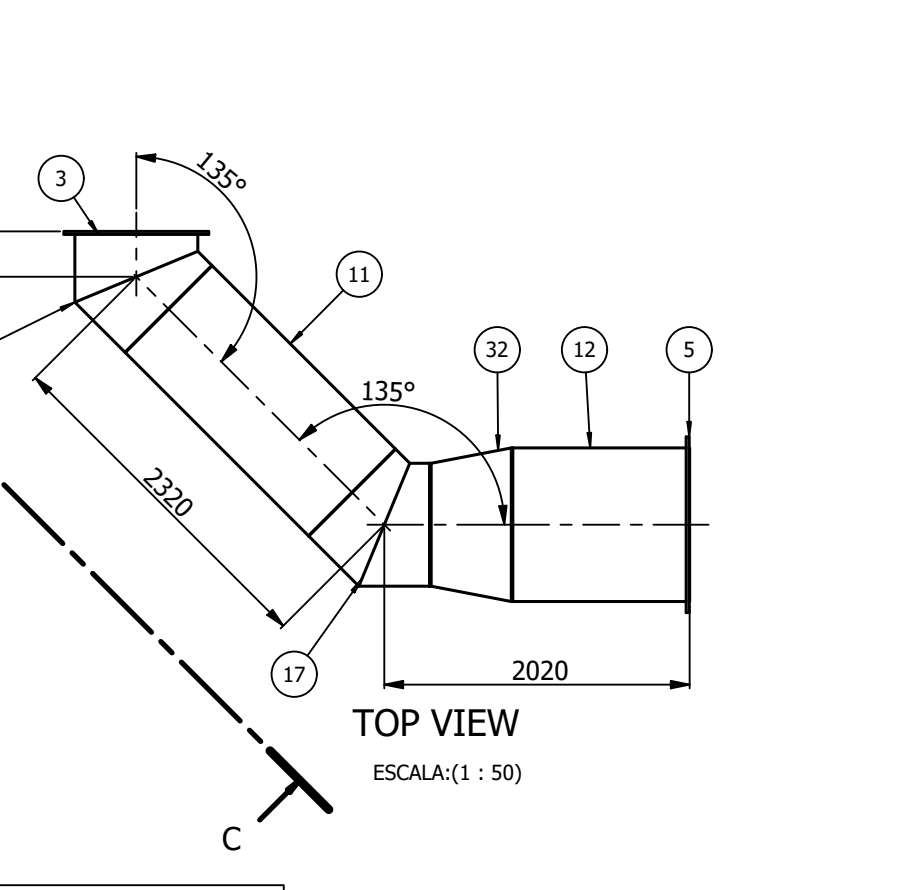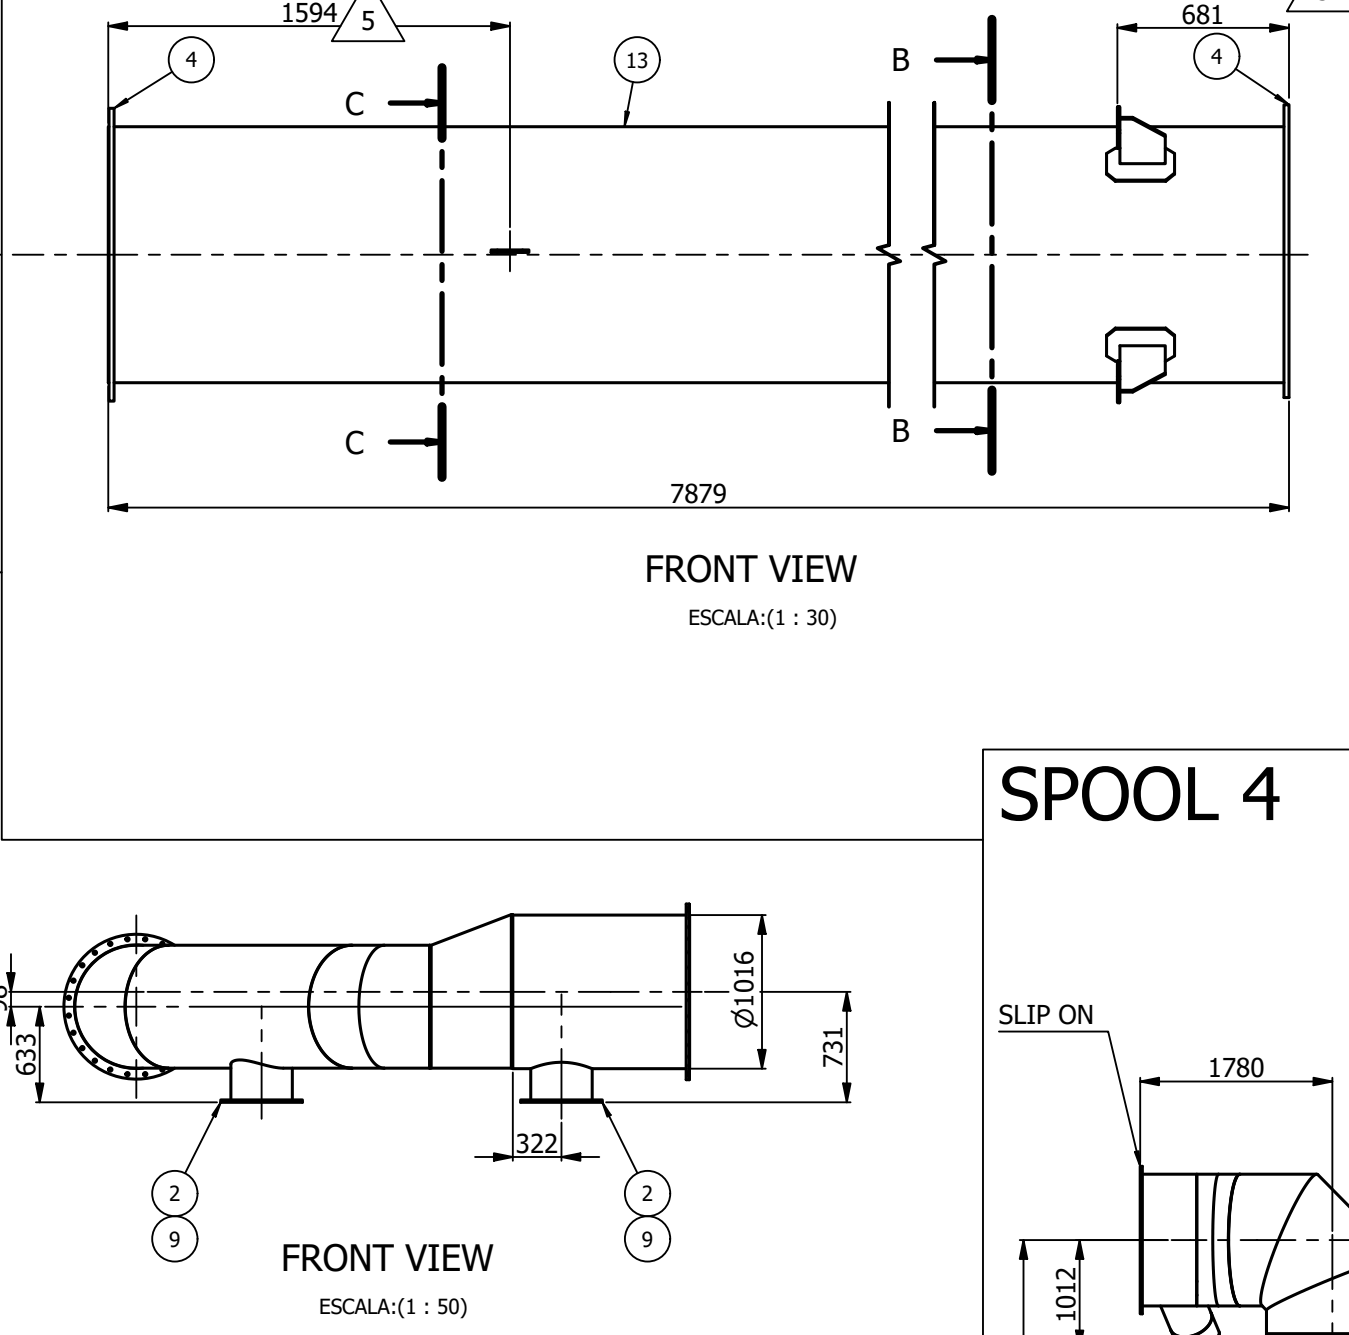


SPOOL 4

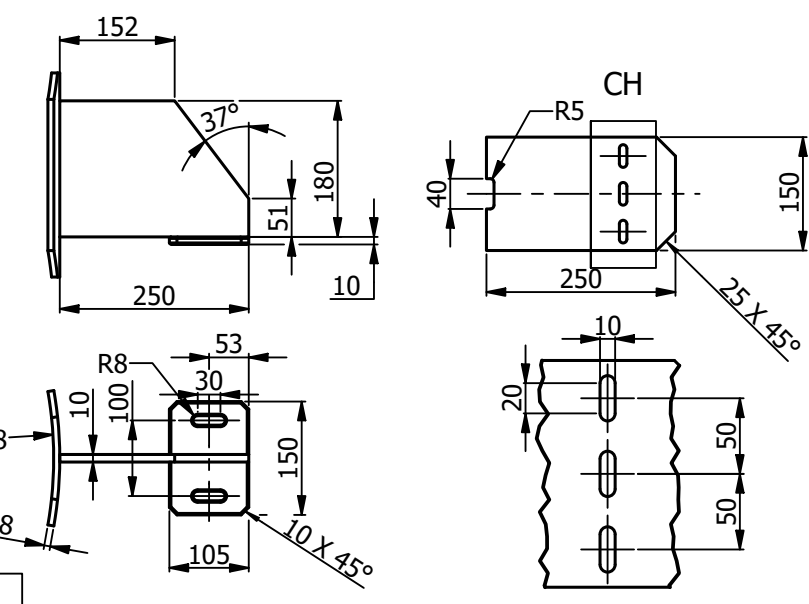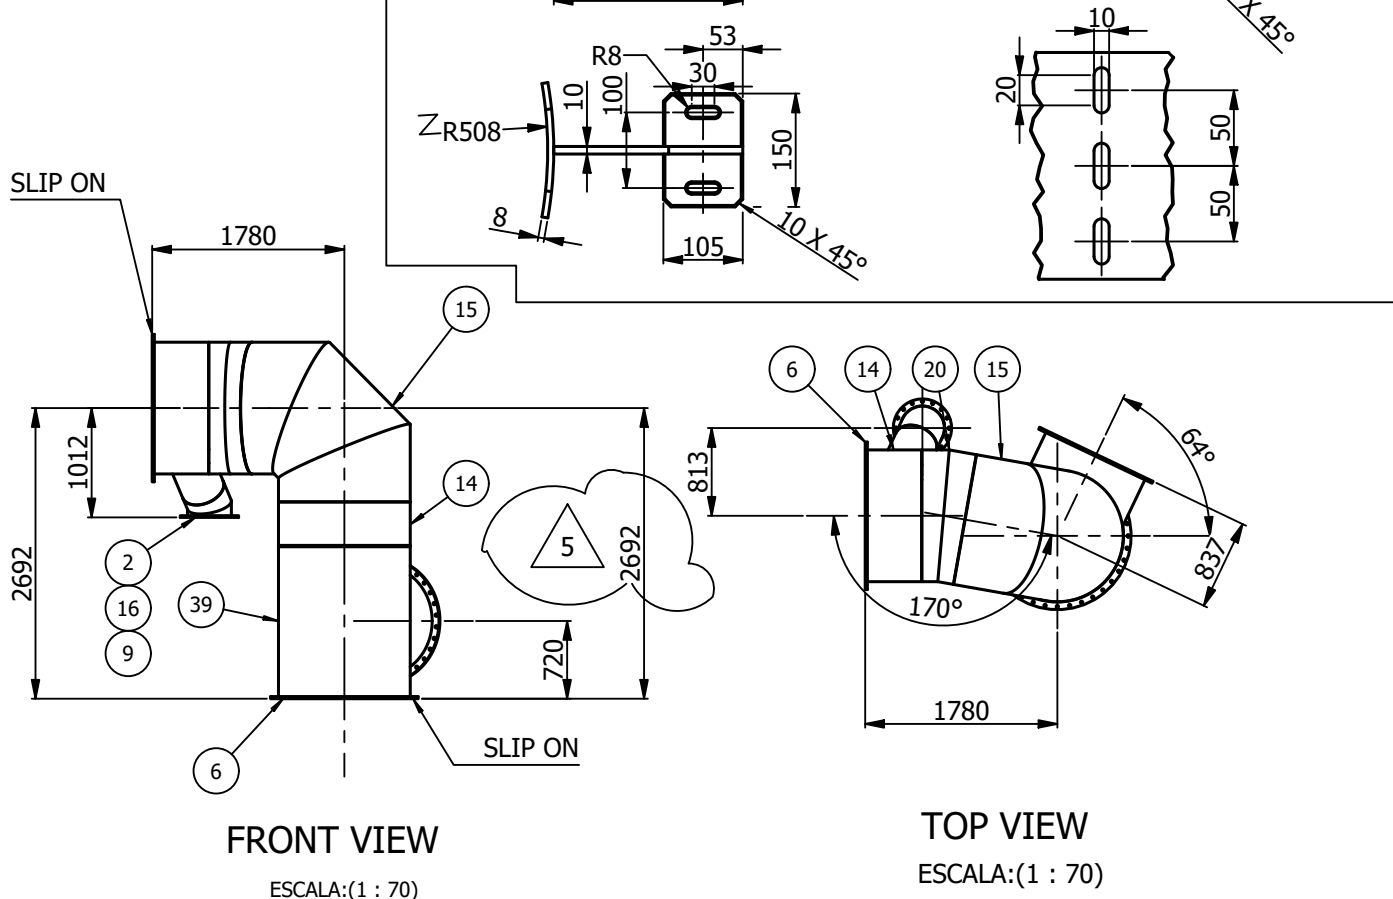


SPOOL 6


SPOOL 7

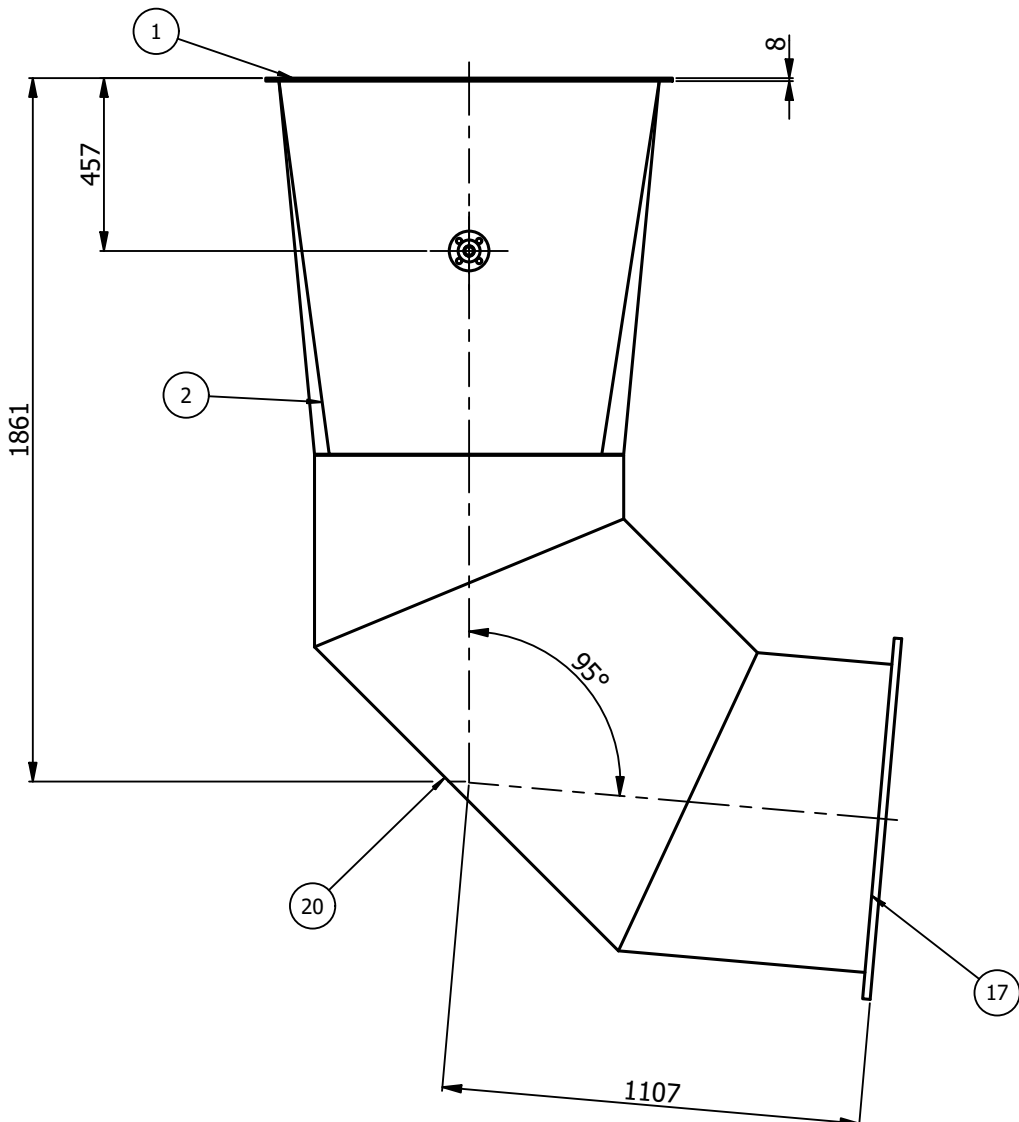


FRONT VIEW
ESCALA:(1 : 20)

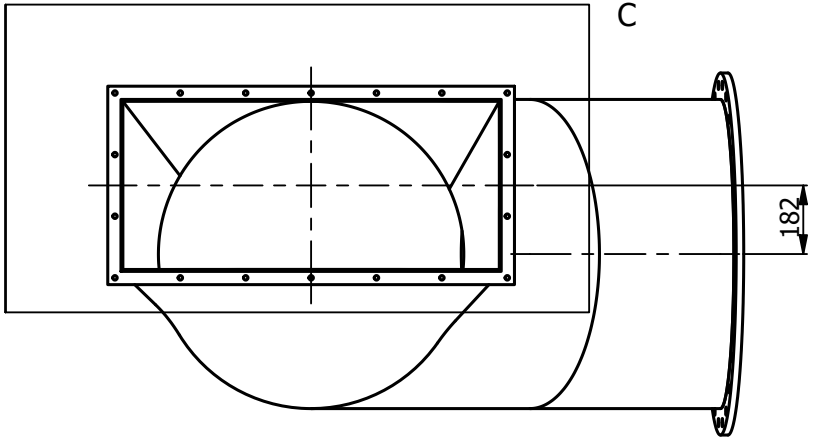


TOP VIEW
ESCALA:(1 : 20)

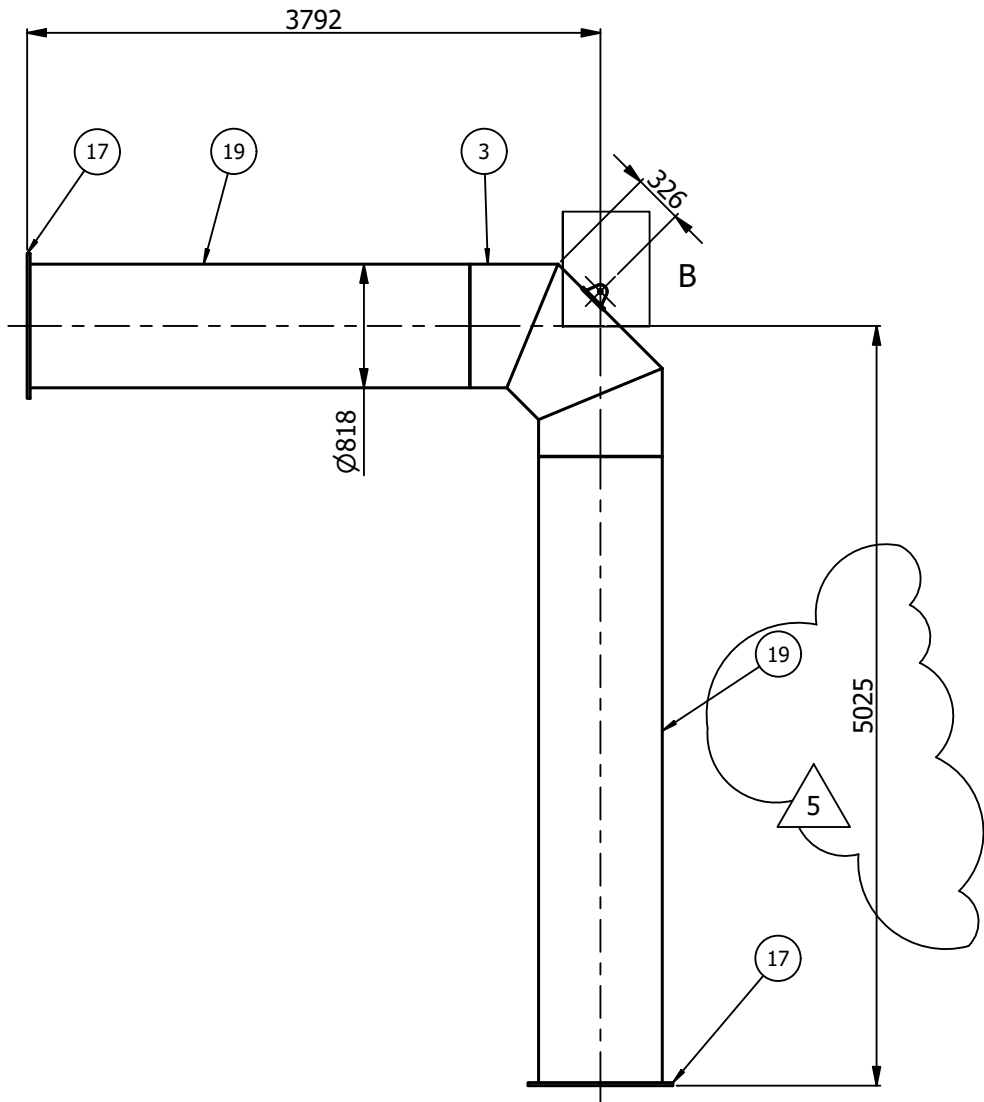


FRONT VIEW
ESCALA:(1 : 50)

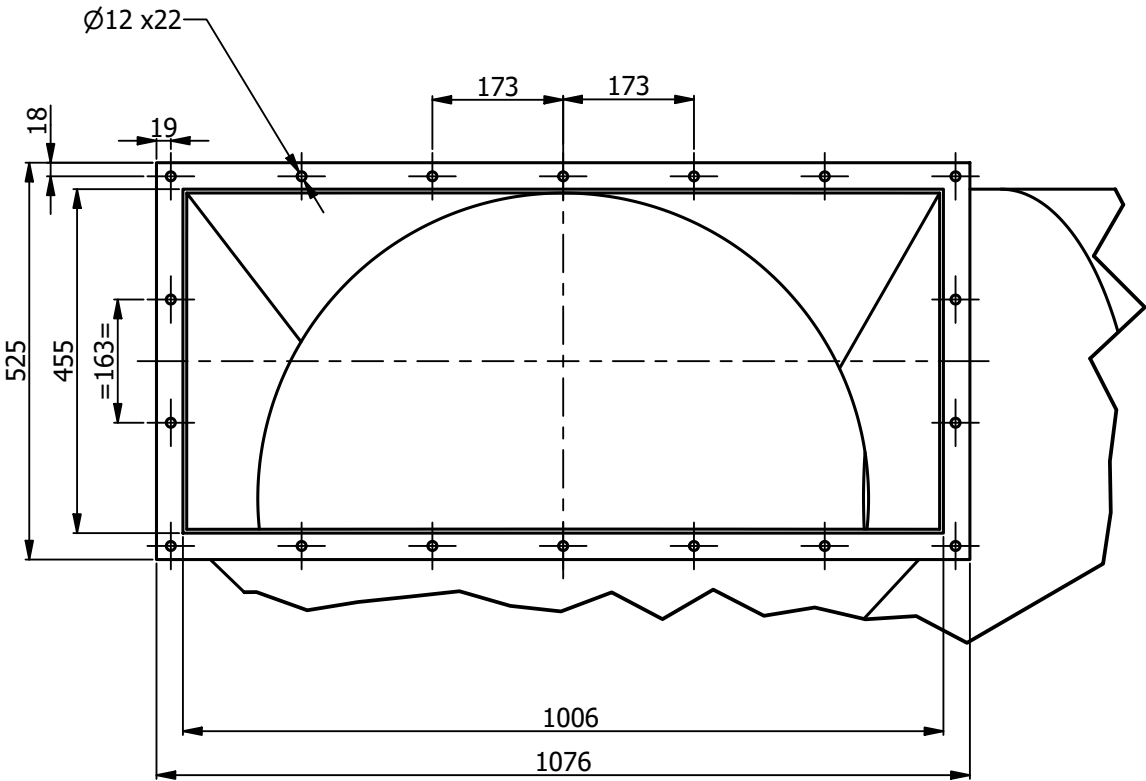


DETAIL C
ESCALA:(1 : 10)

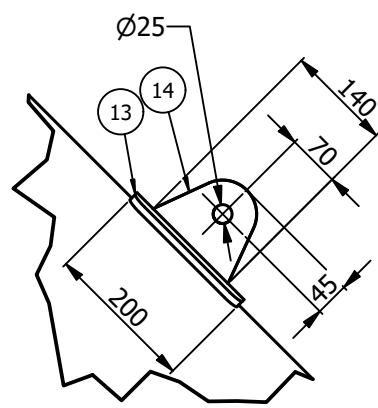


DETAIL B
ESCALA:(1 : 10)



FRONT VIEW
ESCALA:(1 : 10)

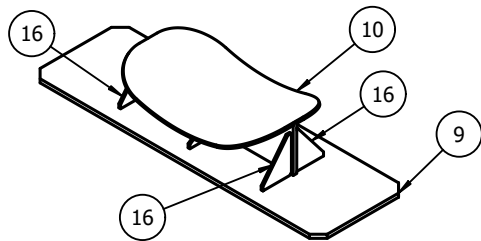

SP-06 ISOMETRIC VIEW
ESCALA:(1 : 15)

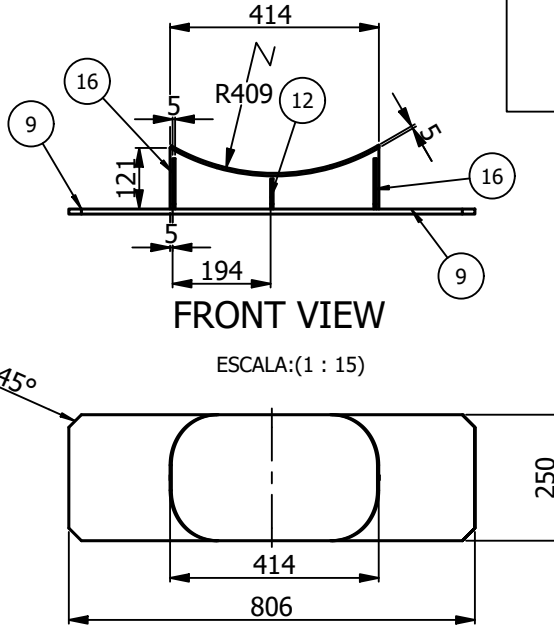


FRONT VIEW


ESCALA:(1 : 15)

TOP VIEW


ESCALA:(1 : 15)




REINFORCEMENT SIGN DETAIL
Quantity:1
ESCALA:(1 : 15)




REINFORCEMENT SIGN DETAIL
Quantity:4
(1 : 5)



REINFORCEMENT SIGN DETAIL
Quantity:2
ESCALA:(1 : 5)

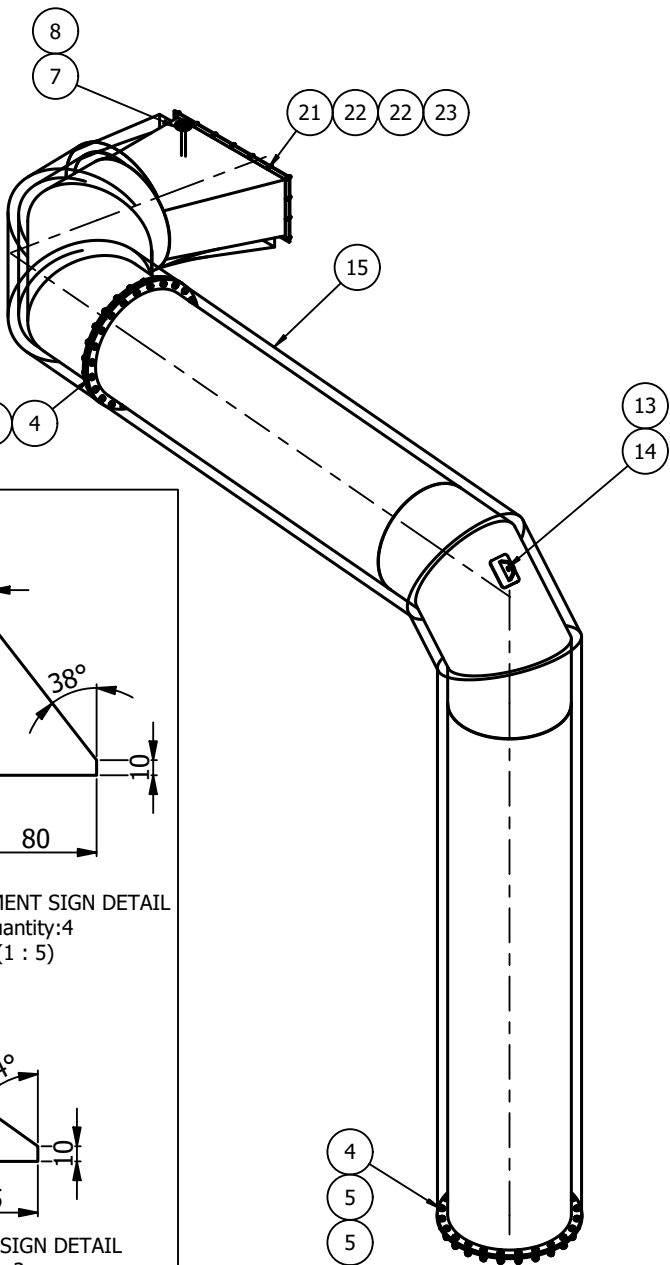

ISOMETRIC VIEW
ESCALA:(1 : 50)

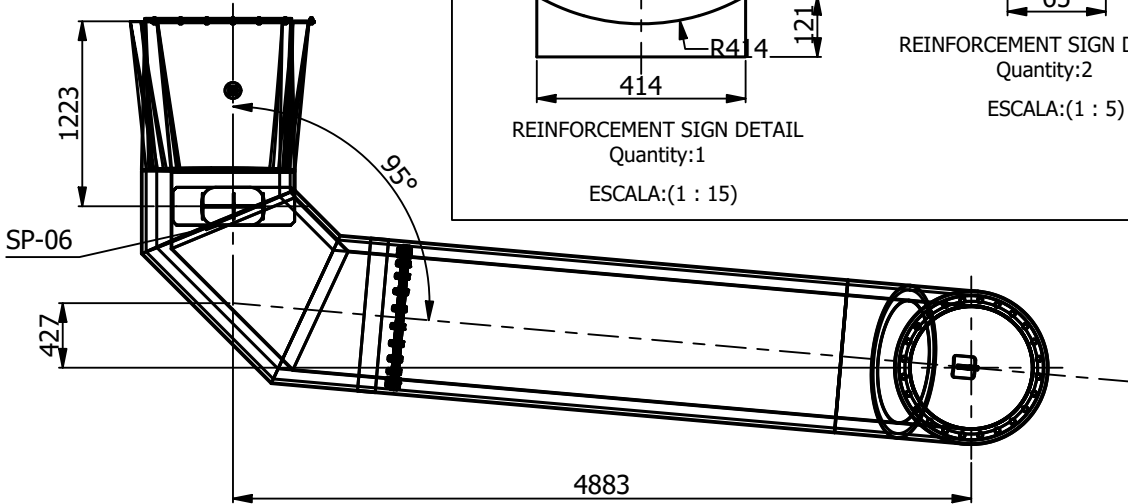

TOP VIEW


ESCALA:(1 : 50)

23	DIN 934 - M10	18	AISI 304 L stainless steel EN 1.4307
22	DIN 125-2 - A 10,5	36	AISI 304 L stainless steel EN 1.4307
21	ISO 4017 - M10 x 35	18	AISI 304 L stainless steel EN 1.4307
20	Elbow 95° DN800 thickness 5 mm	1	AISI 304 L stainless steel EN 1.4307
19	PIPE DN 800 thickness 5 mm	2	AISI 304 L stainless steel EN 1.4307
18	JUNTA DN 800	2	Fibro-ceramic tape 3 mm thickness
17	Brida DN 800 DIN-86044	3	Acero inoxidable AISI 304
16	REINFORCEMENT SIGN thickness 5 mm	4	AISI 304 L stainless steel EN 1.4307
15	Duct Insulation Aluminized Flat sheet: thickness 0.8 mm 1 -Rock wool THK.: 70 mm	1	-
14	OREJA IZAJE	1	AISI 304 L stainless steel EN 1.4307
13	PAD OREJA IZAJE 1430	1	AISI 304 L stainless steel EN 1.4307
12	REINFORCEMENT thickness 5 mm	2	AISI 304 L stainless steel EN 1.4307
11	REINFORCEMENT CRADLE PLATE thickness 10 mm	1	AISI 304 L stainless steel EN 1.4307
10	PAD DN 800 thickness 5 mm	1	AISI 304 L stainless steel EN 1.4307
9	UPPER ANCHOR PLATE thickness 10 mm	1	AISI 304 L stainless steel EN 1.4307
8	PIPE DN 20 P-10 THIKNESS 2 mm	1	AISI 304 L stainless steel EN 1.4307
7	BRIDA DN20 EN 1092-1 TIP12 PN-40	1	AISI 304 L stainless steel EN 1.4307
6	DIN 934 - M20 x 2	48	-
5	DIN 125-2 A A 21	96	-
4	DIN EN ISO 4017 - M20 x 70	48	-
3	Elbow 90° DN800 thickness 5 mm	1	AISI 304 L stainless steel EN 1.4307
2	REDUCTION CONNECTOR TO BURNER	1	AISI 304 L stainless steel EN 1.4307
1	RECTUANGULAR FLANGE BURNER thickness 8 mm	1	AISI 304 L stainless steel EN 1.4307



BILL OF MATERIALS

APPROXIMATE WEIGHT : 1600 Kg

TOLERANCIAS PARA CALDERERÍA - DIN 8570 (ISO 13920)											
DIMENSIONES CALIDAD	>2 a 30	>30 a 120	>120 a 400	>400 a 1000	>1000 a 2000	>2000 a 4000	>4000 a 8000	>8000 a 12000	>12000 a 16000	>16000 a 20000	>20000 —
B	± 1	± 2	± 2	± 3	± 4	± 6	± 8	± 10	± 12	± 14	± 16
FORMA Y POSICIÓN	TOL. DIMEN.	>30 a 120	>120 a 315	>315 a 1000	>1000 a 2000	>2000 a 4000	>4000 a 8000	>8000 a 12000	>12000 a 16000	>16000 a 20000	>20000 —
	TOL. MAS CORTO	± 1,5	± 3	± 5,5	± 9	± 11	± 16	± 20	± 13 mm/m	± 9 mm/m	± 6 mm/m

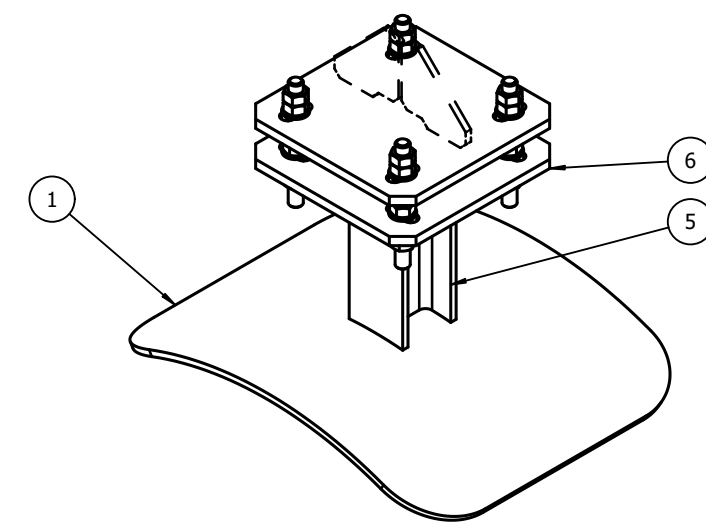


ESCALA:(1 : 10)

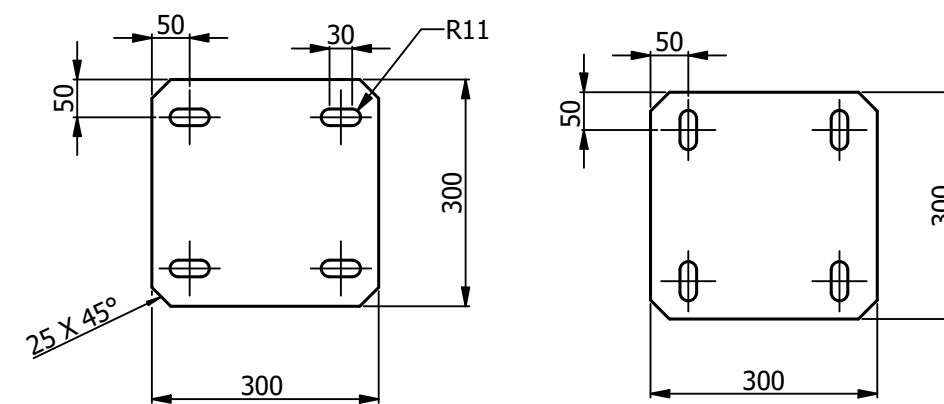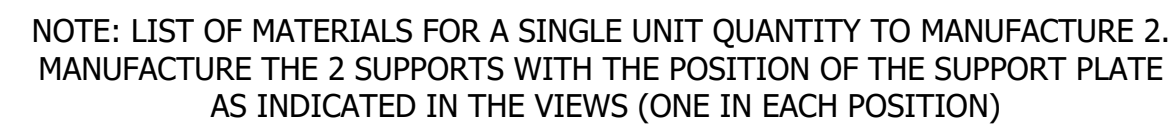


ESCALA:(1 : 10)


LISTA DE MATERIALES

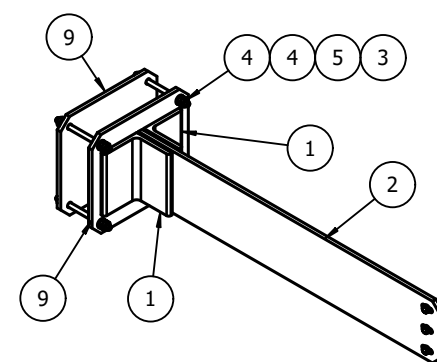

ESCALA:(1 :15)

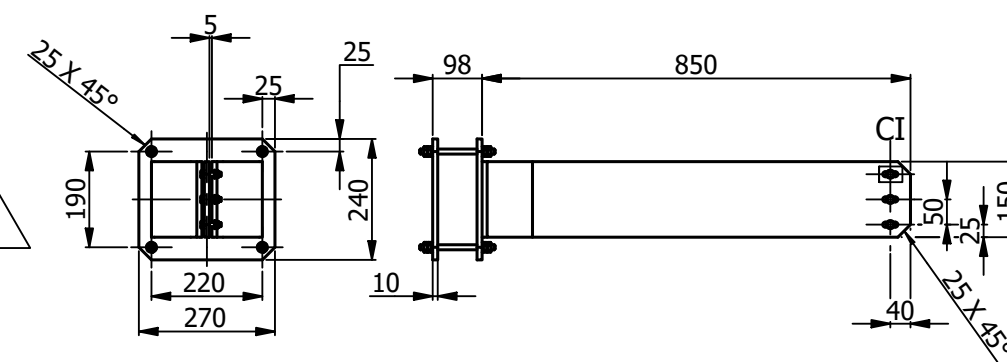

ESCALA:(1 :15)

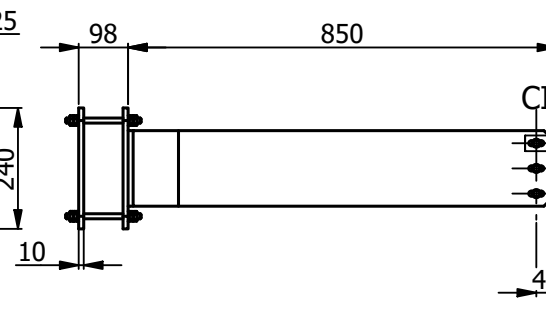

ESCALA:(1 :15)

Technical drawing of a part with a hole. The drawing shows a cross-section with a central hole. The dimensions 10 and 20 are indicated, likely representing the radius and diameter of the hole, respectively.

ESCALA:(1 : 5)

LISTA DE MATERIALES

A diagram of a horizontal beam of length 6. A triangular load is applied to the right end of the beam, with a peak intensity of 20. The load is represented by a triangle with a base of 6 and a height of 20. The area under the load is labeled 5. The beam is supported by a pin support at the left end and a roller support at the right end. The dimensions are labeled: 6 for the beam length, 20 for the peak load intensity, 5 for the area under the load, and 6 for the base of the triangular load. The beam is divided into two segments by a vertical line, with dimensions 23 and 8 indicated for the segments.

ESCALA:(1 : 10)

