
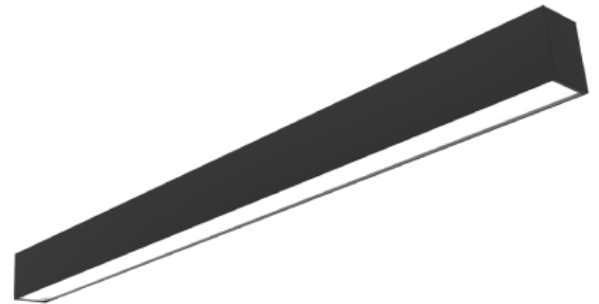


SPECIFICATION

Energyline 65 1135mm ceiling surface black luminaire with 2000lm/m satin diffuser 3000K CRI80 direct lighting complete with fully internal DALI control gear, 7 year warranty, light leak prevention, L80 B10 72000hrs and IP5x protection

- Product ID: **ELA-00857**
- Fitting Width: 65mm
- Fitting Height: 86mm
- Total Fitting Length: 1135mm
(includes end caps)
- Direct Distribution: Satin Diffuser
- Direct Output: 2000lm/m
- CRI: 80Ra
- CCT: 3000K
- Control: DALI 2
- Driver: Internal
- Wattage: 20.64W (18W/m)
- Lifetime: L80 B10 72,000h
- Mounting: Supplied with pre-drilled holes in extrusion to direct fix to ceiling, for easy installation.
- IP Rating: IP5X
- Finish: Black

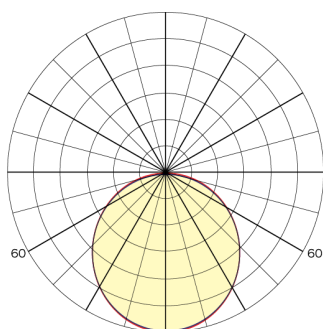

INDICATIVE IMAGES ONLY

PRODUCT FEATURES

- Accu-join for light-tight seamless joins
- Concealed fixing, light-tight end caps
- Factory finished for rapid and low risk installation
- Efficacy up to 110lm/W




KEY

: Join

: Mounting

Product Drawing

Product Code: ELA-00857
Total Length: 1135mm
Energyline 65 Ceiling surface



Drawing not to scale
Luminaire length includes 6mm end cap at each end
Drawing based on product installation in NZL

All rights reserved. This drawing is the property of Energyline Ltd and must not be copied and reproduced, not may three dimensional works be produced there from without the express written permission of Energyline Ltd. Product drawing is indicative only, details may be changed at the discretion of Energyline Ltd.