

Roof plan slices · grid A

horizontal cuts through the roof, looking down


cut at +8.50 (1:20)

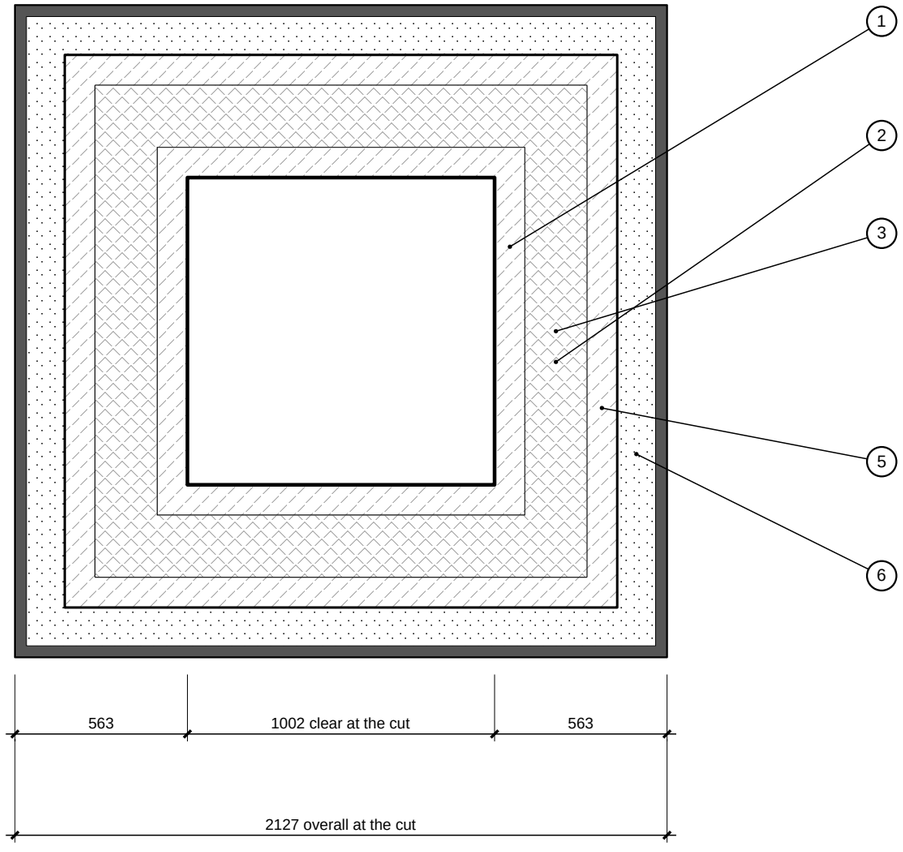

cut at +4.00 (1:100)

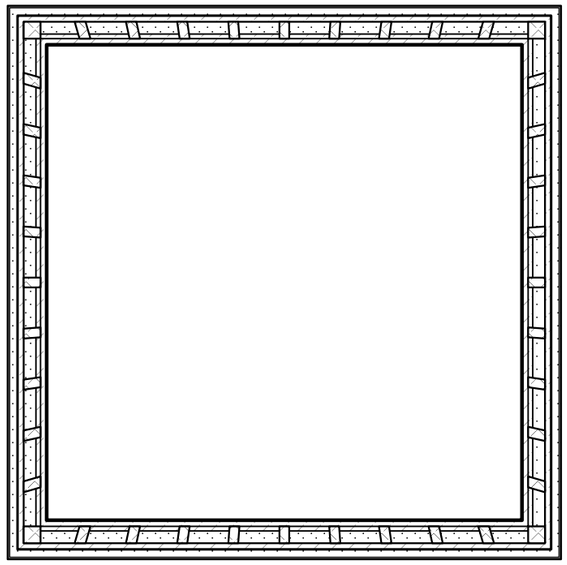

cut at +7.00 (1:100)



1. Inner layer 1, 80 printed, room side, then layer 2 (printed, thinner towards the crown).
2. Air zone, open between the ribs, for insulation (dotted).
3. Cast concrete cut by the plane (crossed hatch): the ribs, columns of grid A, each 160 wide across the rib and 240 deep (the cut is longer than 160 and sheared where the rib is inclined in the face; 4 Ø16 and stirrups as in the rib section), and, at the crown, the whole top ring.
4. Corner blocks: the four hip ribs, cut across the corners (cast).
5. Outer layer 80, printed.
6. Insulation 100 (very thin line), then the outer layer 30 (dark).

● from your sketches
○ assumed by me, to confirm

Notes

Heights are levels from the ground floor. Large slice at +8.50 (at the crown, 5999 above the eave), drawn at 1:20 so the top ring is readable, through the top ring; small slices at +4.00 and +7.00, 1:100 (the scale bar is for 1:50).

Option A: all columns at +4.00; at +7.00 every other column has stopped (they stop once the spacing is 500); at the crown only the four hip ribs and the top ring are left. The middle horizontal ribs are at +4.31, +6.13 and +7.77.

Layer 2 thins towards the crown (the leaf is 160 at the base, 80 at the crown). Ribs use the same geometry as the roof-grid sheets; bars and stirrups are assumed.

0 1 2 3 4 5 m

Scale 1:50 at A3 · dimensions in mm · draft 1, 2026-10-11
pyramid-roof · hand estimates, not engineered