


REFORGE CAN MAPPER – UNTESTED REFERENCE CIRCUIT

For 1st-gen DCC Advanced Rev B 1.0 only. Not a production-qualified automotive design.

JP1 installed: adds 120 ohm termination. Leave open when tapping an already terminated bus.

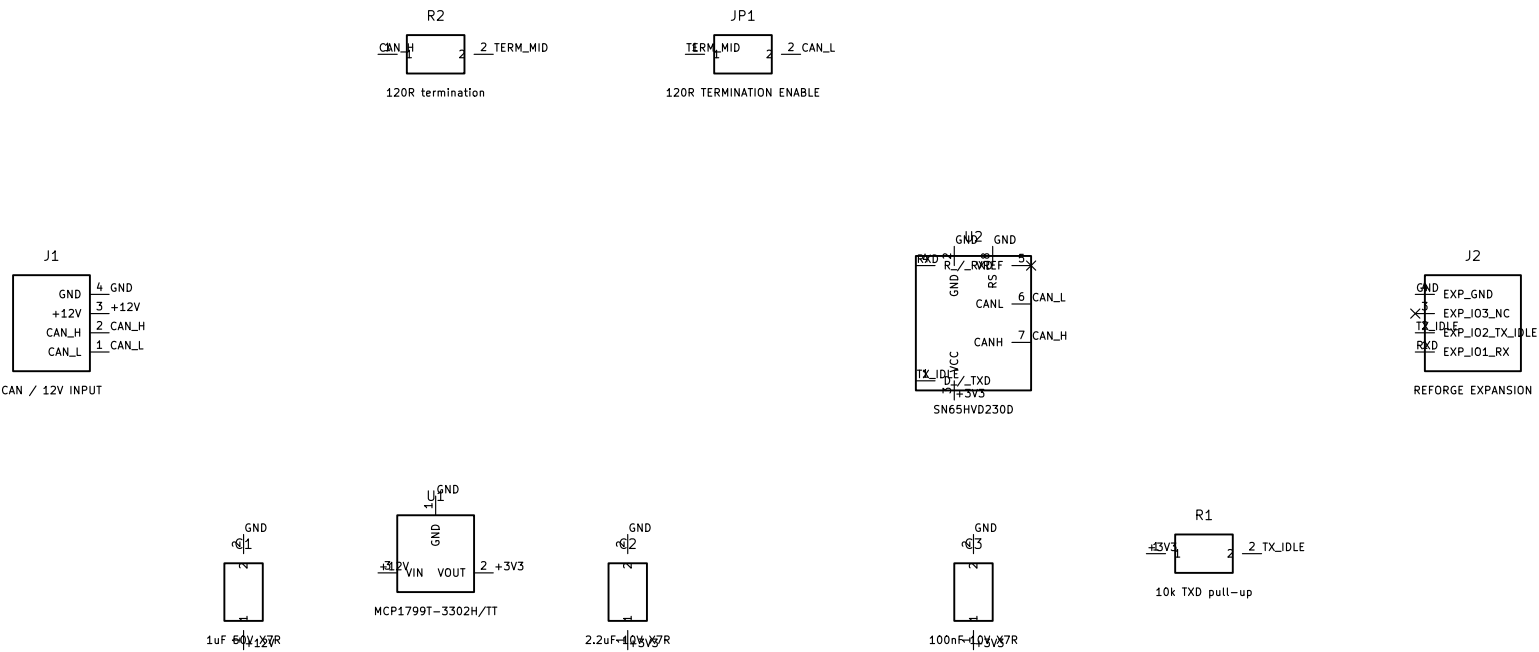

J2 pin 1 = EXP_I01 / GPIO18 / CAN RX; pin 2 = EXP_I02 / GPIO15 / listen-only TX idle; pin 3 = NC; pin 4 = EXP_GND.

Simple 12 V input only: no reverse-polarity, load-dump, surge, fuse, or isolation protection is included.

SN65HVD230 RS is tied low for high-speed mode. TXD has a 10k pull-up so the default bus state is recessive.

1st-gen DCC Advanced Rev B 1.0 plugin connector
UNTESTED REFERENCE ONLY – NOT PRODUCTION QUALIFIED
Gonzo Inc.

Sheet: /
File: Reforge_CAN_Interface_Reference.kicad_sch

Title: Reforge CAN Mapper Interface – Untested Reference

Size: A4	Date: 2026-10-07	Rev: 0.1
KiCad E.D.A. 10.0.5	Id: 1/1	