


PAF961X module AP guide

PAF961X EVK

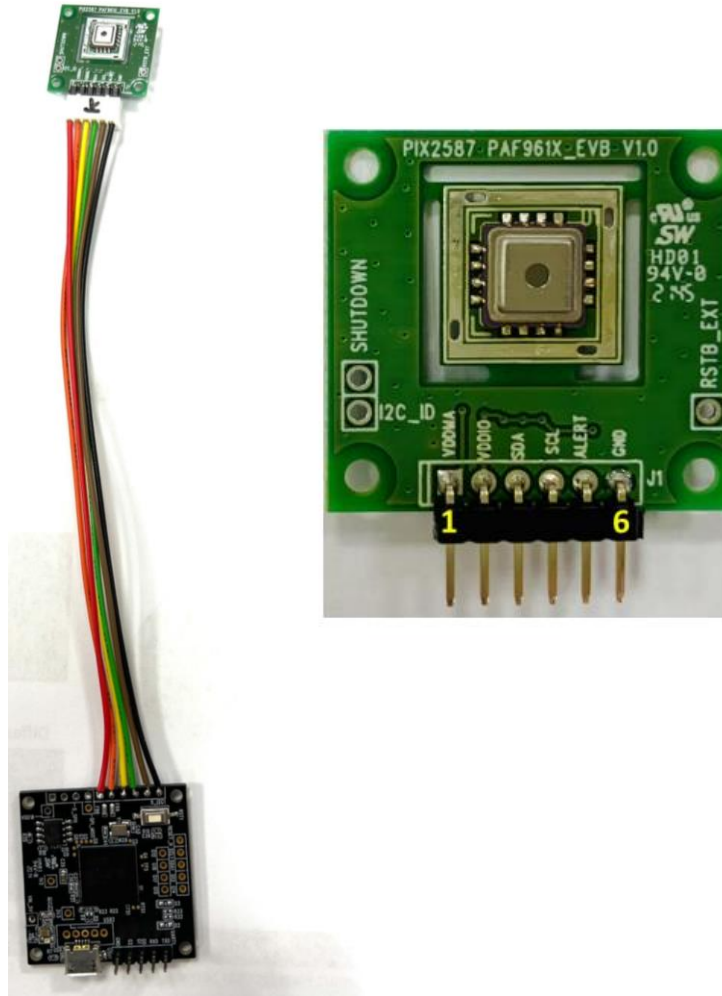

Pin No	Signal Name
1	VDDMA (3.6V to 2.2V)
2	VDDIO (3.6V to 1.62V)
3	I2C_SDA
4	I2C_SCL
5	ALERT
6	GND

Figure 5. IO Pin Definition

PAF961X tool driver installer

名稱	修改日期	類型	大小
PKF961x Demo AP (Polling) 20200424	2022/7/22 下午 0...	檔案資料夾	
ToolPackage-Installer.exe	2015/8/26 下午 0...	應用程式	61,110 KB

Step .1 installer driver first

名稱	修改日期	類型	大小
PKF961x Demo AP (Polling) 20200424	2022/7/22 下午 0...	檔案資料夾	
ToolPackage-Installer.exe	2015/8/26 下午 0...	應用程式	61,110 KB

Step .2 open AP folder

PAF961X verify AP Run

AP



名稱	修改日期	類型	大小
 defaultBurstModeSetting.asc	2020/4/24 下午 02:56	ASC 檔案	1 KB
 FX2Ctrl.dll	2020/4/23 下午 02:56	應用程式擴充	64 KB
 modeStatue.set	2021/3/10 下午 04:58	SET 檔案	1 KB
 OpenTK.dll	2014/7/24 上午 07:15	應用程式擴充	3,911 KB
 OpenTK.GLControl.dll	2014/7/24 上午 07:15	應用程式擴充	48 KB
 ThermopileUtility	2020/4/24 下午 02:42	應用程式	418 KB

AP Main Setup

The screenshot shows the 'PKF271 Polling Mode Verification AP' window. It features a 'Stop' button at the top left, a 'Log Data' checkbox, a time input field set to '0 sec', and 'FPS: 4'. Below these are two temperature readouts: 'To = 25.59 °C' and 'Ta = 24.41 °C'. Red arrows point from external labels to these UI elements: 'Log/儲存測試資料' points to the 'Log Data' checkbox, 'Start/Stop' points to the 'Stop' button, '目標物溫度/Object temperature' points to the 'To' readout, and '晶片周圍溫度ambient temperature' points to the 'Ta' readout.

PKF271 Polling Mode Verification AP ...

Stop Start/Stop

☐ Log Data 0 sec FPS: 4

Log/儲存測試資料

To = 25.59 °C 目標物溫度/Object temperature

Ta = 24.41 °C 晶片周圍溫度ambient temperature

Start log (long time record)

 defaultBurstModeSetting.asc	2020/4/24 下午 02:56	ASC 檔案	1 KB
 FX2Ctrl.dll	2020/4/23 下午 02:56	應用程式擴充	64 KB
 modeStatue.set	2021/3/10 下午 04:58	SET 檔案	1 KB
 OpenTK.dll	2014/7/24 上午 07:15	應用程式擴充	3,911 KB
 OpenTK.GLControl.dll	2014/7/24 上午 07:15	應用程式擴充	48 KB
 ThermopileUtility	2020/4/24 下午 02:42	應用程式	418 KB
 Temp 2021-03-10 17-08-41	2021/3/10 下午 05:07	Microsoft Excel 逗點...	1 KB

Log 

A	B	C
FrameNum	To	Ta
0	25.8125	24.5
1	26.03125	24.53125
2	25.75	24.53125
3	25.6875	24.5
4	25.59375	24.5
5	25.6875	24.5
6	25.59375	24.5
7	25.59375	24.5
8	25.65625	24.46875
9	25.71875	24.53125
10	25.6875	24.5