

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1931801

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5566

Vertical, Single Row With Pegs



Features and Benefits

- Positive housing locks to mate with Mini-Fit Jr. single row receptacles 5557
- Fully isolated terminals to protect contacts from damage
- Peg-mounted vertical headers for increased board retention
- Drain holes are standard to allow washing of PCB after processing (contact Molex for headers without drain holes)

Reference Information

Packaging: Tube or bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 single row receptacle
PCB Thickness: 1.60mm (.062")
Process: Wave solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical


Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass or Phosphor Bronze
Plating: Tin or Select Gold
Underplating: Nickel
Operating Temperature: -40 to +105°C

Circuits	Order No.				Lead-free
	Tin Plated		Select Gold Plated (30µ")		
	94V-2	94V-0	94V-2	94V-0	
3	39-30-5039	39-30-6030	39-30-2037	39-30-2038	Yes
4	39-30-5049	50-30-4466	39-30-2047	39-30-2048	
5		50-30-4467		39-30-2058	

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5569

Right Angle, Single Row With Pegs

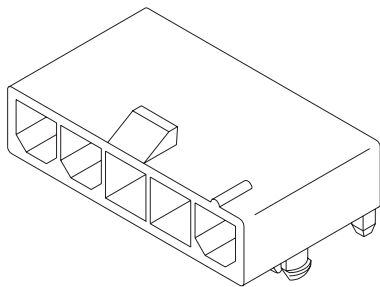

Features and Benefits

- Pegs provide increased board retention
- Ideal for low profile power applications
- Positive housing locks to mate with Mini-Fit Jr. single row receptacles 5557
- Fully isolated terminals to protect contacts from damage

Reference Information

Packaging: Tray or bag
UL File No.: E29179
CSA File No.: LR19980
Mates With: 5557 single row receptacle
TUV License No.: R75142
PCB Thickness: 1.60mm (.062")
Process: Wave solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A
45750	12.0A	12.0A	12.0A	11.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical


Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass
Plating: Tin or Select Gold
Underplating: Nickel
Operating Temperature: -40 to +105°C

Circuits	Order No.				Lead-free
	Tin Plated		Select Gold Plated		
	94V-2	94V-0	94V-2	94V-0	
3	39-30-7031	39-30-7032	39-30-4031	39-30-4032	Yes
4	39-30-7041	39-30-7042	50-30-4438	50-30-4441	
5	39-30-7051	39-30-7052	50-30-4439	50-30-4442	

4.20mm (.165") Pitch Mini-Fit Jr.™ Plug

5559
**Dual Row
With and without Panel Mount Ears**


Features and Benefits

- Wire-to-wire plug for panel-mounted or free-hanging applications
- Positive housing locks to mate with Mini-Fit Jr. receptacle
- Fully isolated terminals to protect contacts from damage

Reference Information

Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacle
Use With: 5558, 30490, 46134 or 46012 terminals
Panel Thickness: .079 to 2.00mm (.031 to 0.80")
Designed In: Millimeters

Mechanical


Contact Insertion Force: 1.5kg max.
Contact Retention to Housing: 3.0kg min.

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Operating Temperature: -40 to +105°C

Circuits	Order No.			
	Panel Mount		Free Hanging	
	94V-2	94V-0	94V-2	94V-0
2	39-01-2021	39-01-2026	39-01-3023	39-01-3029
4	39-01-2041	39-01-2046	39-01-3043	39-01-3049
6	39-01-2061	39-01-2066	39-01-3063	39-01-3069
8	39-01-2081	39-01-2086	39-01-3083	39-01-3089
10	39-01-2101	39-01-2106	39-01-3103	39-01-3109
12	39-01-2121	39-01-2126	39-01-3123	39-01-3129
14	39-01-2141	39-01-2146	39-01-3143	39-01-3149
16	39-01-2161	39-01-2166	39-01-3163	39-01-3169
18	39-01-2181		39-01-3183	
20	39-01-2201			
22	39-01-2221			
24	39-01-2241	39-01-2246		

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5566
**Vertical, Dual Row
With Pegs, with Drain Holes**


Features and Benefits

- Board-mounting pegs provide polarization during placement on the PCB and increased retention during soldering process
- Positive housing locks to mate with Mini-Fit Jr. receptacle
- Fully isolated terminals to protect contacts from damage
- Drain holes are standard to allow washing of PCB after processing (contact Molex for headers without drain holes)

Reference Information

Packaging: Tray or tube
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacles
PCB Thickness: 1.60mm (.062")
Process: Wave solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical


Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass
Plating: Tin or Select Gold
Underplating: Nickel
Operating Temperature: -40 to +105°C

Circuits	Order No.				Lead-free
	Tin Plated		Gold Plated (30μ")		
	94V-2	94V-0	94V-2	94V-0	
2	39-30-6027	39-30-6028	39-29-9024	39-28-9028	Yes
4	39-30-6047	39-30-6048	39-29-9044	39-28-9048	
6	39-30-6067	39-30-6068	39-29-9064	39-28-9068	
8	39-30-6087	39-30-6088	39-29-9084	39-28-9088	
10	39-30-6107	39-30-6108	39-29-9104	39-28-9108	
12	39-30-6127	39-30-6128	39-29-9124	39-28-9128	
14	39-30-6147	39-30-6148	39-29-9144	39-28-9148	
16	39-30-6167	39-30-6168	39-29-9164	39-28-9168	
18	39-30-6187	39-30-6188	39-29-9184	39-28-9188	
20	39-30-6207	39-30-6208	39-29-9204	39-28-9208	
22	39-30-6227	39-30-6228	39-29-9224		
24	39-30-6247	39-30-6248	39-29-9244	39-28-9248	

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5566

Vertical, Dual Row
Without Pegs, without Drain Holes



Features and Benefits

- Positive housing locks to mate with Mini-Fit Jr. receptacle
- Fully isolated terminals to protect contacts from damage
- Drain hole option available, contact Molex

Reference Information

Packaging: Bag
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacles
PCB Thickness: 1.60mm (.062")
Process: Wave solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass or Phosphor Bronze
Plating: Tin
Underplating: Copper
Operating Temperature: -40 to +105°C


Circuits	Order No.		Lead-free
	94V-2	94V-0	
2	39-28-1023	39-28-8020	Yes
4	39-28-1043	39-28-8040	
6	39-28-1063	39-28-8060	
8	39-28-1083	39-28-8080	
10	39-28-1103	39-28-8100	
12	39-28-1123	39-28-8120	

Circuits	Order No.		Lead-free
	94V-2	94V-0	
14	39-28-1143	39-28-8140	Yes
16	39-28-1163	39-28-8160	
18	39-28-1183	39-28-8180	
20	39-28-1203	39-28-8200	
22	39-28-1223	39-28-8220	
24	39-28-1243	39-28-8240	

4.20mm (.165") Pitch Mini-Fit Jr.™ Header

5569

Right Angle, Dual Row with Pegs

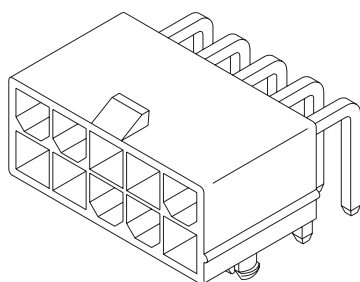

Features and Benefits

- Board mounting pegs provide polarization during placement on PCB and increased board retention during solder processing
- Low profile for space constraints
- Positive housing locks
- Fully isolated terminals to protect contacts from damage

Reference Information

Packaging: Tray
UL File No.: E29179
CSA File No.: LR19980
TUV License No.: R75142
Mates With: 5557 dual row receptacles
PCB Thickness: 1.60mm (.062")
Process: Wave Solder
Designed In: Millimeters

Electrical

Voltage: 600V
Current: (Used with 16 AWG)

Series	Circuits			
	2-3	4-6	7-10	12-24
46083	9.0A	8.0A	7.0A	6.0A
45750	12.0A	12.0A	12.0A	11.0A

Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Insertion Force to PCB: 5.0kg max.
Durability: 30 cycles

Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
Contact: Brass
Plating: Tin or Select Gold
Underplating: Nickel
Operating Temperature: -40 to +105°C

Circuits	Order No.				Lead-free
	Tin Plated		Select Gold Plated (30µ")		
	94V-2	94V-0	94V-2	94V-0	
2	39-30-7025	39-30-7026	39-30-0023	39-30-0024	Yes
4	39-30-7045	39-30-7046	39-30-0043	39-30-0044	
6	39-30-7065	39-30-7066	39-30-0063	39-30-0064	
8	39-30-7085	39-30-7086	39-30-0083	39-30-0084	
10	39-30-7105	39-30-7106	39-30-0103	39-30-0104	
12	39-30-7125	39-30-7126	39-30-0123	39-30-0124	
14	39-30-7145	39-30-7146	39-30-0143	39-30-0144	
16	39-30-7165	39-30-7166	39-30-0163	39-30-0164	
18	39-30-7185		39-30-0183		
20	39-30-7205	39-30-7206	39-30-0203	39-30-0204	
22	39-30-7225				
24	39-30-7245	39-30-7246	39-30-0243	39-30-0244	



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

【 3. 定格及び適用電線 RATINGS AND APPLICABLE WIRES 】

項 目 Item	規 格 Standard				
最大許容電圧 Rated Voltage (MAX.)	6 0 0 V				
最大許容電流 及び適用電線 Rated Current (MAX.) and Applicable wires	極数	2	4,6	8,10	12-24
	AWG#18	9 A	8 A	7 A	6 A
	AWG#20	7 A	6 A	5 A	5 A
	AWG#22	5 A	4 A	4 A	4 A
	AWG#24	4 A	3 A	3 A	3 A
	AWG#26	3 A	2 A	2 A	2 A
	AWG#28	2 A	1 A	1 A	1 A
使用温度範囲 Ambient Temperature Range		- 4 0 ° C ~ + 1 0 5 ° C *1			

*1: 通電による温度上昇分も含む。

Including terminal temperature rise.

【 4. 性能 PERFORMANCE 】

4-1. 電気的性能 Electrical Performance

項 目 Item		条 件 Test Condition	規 格 Requirement
4-1-1	接触抵抗 Contact Resistance	コネクタを嵌合させ、開放電圧 20mV 以下、短絡電流 10mA にて測定する。 (JIS C5402 5.4) Mate connectors, measure by dry circuit, 20mV MAX. , 10mA. (JIS C5402 5.4)	10 milliohm MAX.
4-1-2	絶縁抵抗 Insulation Resistance	コネクタを嵌合させ、隣接するターミナル間及びターミナル、アース間に、DC 500V を印加し測定する。 (JIS C5402 5.2/MIL-STD-202 試験法 302) Mate connectors, apply 500V DC between adjacent terminal or ground. (JIS C5402 5.2/MIL-STD-202 Method 302)	1000 Megohm MIN.

	REVISE ON PC ONLY		TITLE: NEW MINI FIT CONN. -LEAD FREE-製品仕様書		
	A	SEE SHEET 1 OF 8			
			THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	REV.	DESCRIPTION			
DOCUMENT NUMBER PS-5557-043				FILE NAME PS5557043.doc	SHEET 2 OF 8

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

項 目 Item		条 件 Test Condition	規 格 Requirement
4-1-3	耐電圧 Dielectric Strength	コネクタを嵌合させ、隣接するターミナル間及びターミナル、アース間に、AC 1500V (実効値)を1分間 印加する。 (JIS C5402 5.1/MIL-STD-202 試験法 301) Mate connectors, apply 1500V AC(rms) for 1 minute between adjacent terminal or ground. (JIS C5402 5.1/MIL-STD-202 Method 301)	異状なきこと No Breakdown
4-1-4	圧着部接触抵抗 Contact Resistance on Crimped Portion	ターミナルに適合電線を圧着し、開放電圧 20mV 以下、短絡電流 10mA にて測定する。 Crimp the applicable wire on to the terminal, measure by dry circuit, 20mV MAX., 10mA.	5 milliohm MAX.

4-2. 機械的性能 Mechanical Performance

項 目 Item		条 件 Test Condition	規 格 Requirement	
4-2-1	挿入力及び抜去力 Insertion / Withdrawal Force	毎分 25±3mm の速さで挿入、抜去を行う。 Insert and withdraw connectors at the speed rate of 25±3mm/minute.	第6項参照 Refer to paragraph 6	
4-2-2	圧着部引張り強度 Crimping Pull Out Force	圧着されたターミナルを治具に固定し、電線を軸方向に 毎分 25±3mm の速さで引張る。 (JIS C5402 6.8) Fix the crimped terminal, apply axial pull out force on the wire at the speed rate of 25±3mm/minute. (JIS C5402 6.8)	AWG.#18	88.3 N {9.0kgf} MIN.
			AWG.#20	58.9 N {6.0kgf} MIN.
			AWG.#22	39.3 N {4.0kgf} MIN.
			AWG.#24	29.5 N {3.0kgf} MIN.
			AWG.#26	19.7 N {2.0kgf} MIN.
			AWG.#28	9.9 N {1.0kgf} MIN.
4-2-3	ターミナル挿入力 Terminal Insertion Force	圧着されたターミナルをハウジングに挿入する。 Insert the crimped terminal into the housing.	14.7 N { 1.5 kgf } MAX.	

REVISE ON PC ONLY

TITLE:

A

SEE SHEET 1 OF 8

NEW MINI FIT CONN.

-LEAD FREE-

製品仕様書

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV.

DESCRIPTION

DOCUMENT NUMBER

PS-5557-043

FILE NAME

PS5557043.doc

SHEET

3 OF 8

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

項 目 Item		条 件 Test Condition	規 格 Requirement
4-2-4	ターミナル保持力 Terminal / Housing Retention Force	圧着されたターミナルをハウジングに装着し、電線を軸方向に 毎分 25±3mm の速さで引張る。 Apply axial pull out force at the speed rate of 25±3 mm/minute on the terminal assembled in the housing.	29.5 N { 3.0 kgf } MIN.
4-2-5	ピン保持力 Pin Retention Force	毎分 25±3mm の速さでピンを軸方向に押す。 Apply axial push force at the speed rate of 25±3 mm/minute.	9.9 N { 1.0 kgf } MIN.

4-3. そ の 他 Environmental Performance and Others

項 目 Item		条 件 Test Condition	規 格 Requirement	
4-3-1	繰り返し挿抜 Repeated Insertion / Withdrawal	1分間 10回以下 の速さで挿入、抜去を 30回繰り返す。 When mated up to 30 cycles repeatedly by the rate of 10 cycles/minute.	接触抵抗 Contact Resistance	20 milliohm MAX.
4-3-2	温度上昇 Temperature Rise	コネクタを嵌合させ、最大許容電流を通電し、コネクタの温度上昇分を測定する。 (UL 498) Carrying rated current load. (UL 498)	温 度 上 昇 Temperature Rise	30°C MAX.
4-3-3	耐振動性 Vibration	DC 1mA 通電状態にて、嵌合軸を含む互いに垂直な 3方向 に掃引割合 10~55~10Hz/分、全振幅 1.5mm の振動を 各2時間 加える。 (MIL-STD-202 試験法 201) Amplitude: 1.5 mm P-P Sweep time: 10-55-10 Hz in 1 minute Duration: 2 hours in each X.Y.Z. axes (MIL STD-202 Method 201)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
			瞬 断 Discontinuity	1.0 microsec. MAX.
4-3-4	耐衝撃性 Shock	DC 1mA 通電状態にて、嵌合軸を含む互いに垂直な 6方向 に、490m/s ² { 50G } の衝撃を 各3回 加える。 (JIS C0041/MIL-STD-202 試験法 213) 490m/s ² { 50G }, 3 strokes in each X.Y.Z. axes. (JIS C0041/MIL-STD-202 Method 213)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
			瞬 断 Discontinuity	1.0 microsec. MAX.

	REVISE ON PC ONLY		TITLE: NEW MINI FIT CONN. -LEAD FREE-製品仕様書	
	A	SEE SHEET 1 OF 8		
	REV.	DESCRIPTION	THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DOCUMENT NUMBER PS-5557-043			FILE NAME PS5557043.doc
EN-37-1(019)				

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

項 目 Item		条 件 Test Condition	規 格 Requirement	
4-3-5	耐熱性 Heat Resistance	コネクタを嵌合させ、105±2℃ の雰囲気中に 96時間 放置後取り出し、1～2時間 室温に放置する。 (JIS C0021/MIL-STD-202 試験法 108) 105±2℃, 96 hours (JIS C0021/MIL-STD-202 Method 108)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
4-3-6	耐寒性 Cold Resistance	コネクタを嵌合させ、-40±3℃ の雰囲気中に 96時間 放置後取り出し、1～2時間 室温に放置する。 (JIS C0020) -40±3℃, 96 hours (JIS C0020)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
4-3-7	耐湿性 Humidity	コネクタを嵌合させ、60±2℃、相対湿度 90～95% の雰囲気中に 96時間 放置後取り出し、1～2時間 室温に放置する。 (JIS C0022/MIL-STD-202 試験法103) Temperature : 60±2℃ Relative Humidity : 90 to 95% Duration : 96 hours (JIS C0022/MIL-STD-202 Method 103)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
			耐 電 圧 Dielectric Strength	4-1-3項 満足こと Must meet 4-1-3
			絶縁抵抗 Insulation Resistance	100 Megohm MIN.
4-3-8	温度サイクル Temperature Cycling	コネクタを嵌合させ、-55℃ に 30分、+105℃ に 30分、これを 1サイクル とし、5サイクル 繰り返す。但し、温度移行時間は、5分以内 とする。試験後 1～2時間 室温に放置する。(JIS C0025) 5 cycles of : a) -55℃ 30 minutes b) +105℃ 30 minutes (JIS C0025)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.

REVISE ON PC ONLY

TITLE:

A

SEE SHEET 1 OF 8

NEW MINI FIT CONN.

-LEAD FREE-

製品仕様書

REV.

DESCRIPTION

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DOCUMENT NUMBER

PS-5557-043

FILE NAME

PS5557043.doc

SHEET

5 OF 8

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

項 目 Item		条 件 Test Condition	規 格 Requirement	
4-3-9	塩水噴霧 Salt Spray	コネクタを嵌合させ、 $35\pm 2^{\circ}\text{C}$ にて、重量比 $5\pm 1\%$ の塩水を 48 ± 4 時間 噴霧し、試験後常温で水洗いした後、室温で乾燥させる。 (JIS C0023/MIL-STD-202 試験法 101) 48 ± 4 hours exposure to a salt spray from the $5\pm 1\%$ solution at $35\pm 2^{\circ}\text{C}$. (JIS C0023/MIL-STD-202 Method 101)	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
4-3-10	亜硫酸ガス SO_2 Gas	コネクタを嵌合させ、 $40\pm 2^{\circ}\text{C}$ にて 50 ± 5 ppm の亜硫酸ガス中に 24時間 放置する。 24 hours exposure to 50 ± 5 ppm. SO_2 gas at $40\pm 2^{\circ}\text{C}$.	外 観 Appearance	異常なきこと No Damage
			接触抵抗 Contact Resistance	20 milliohm MAX.
4-3-11	半田付け性 Solder Ability	ターミナルまたはピンをフラックスに浸し、本体の取付け基準面より 1.2mm 迄、 $245\pm 3^{\circ}\text{C}$ の半田に 3 ± 0.5 秒 浸す。 Solder Time : 3 ± 0.5 seconds. Solder Temperature : $245\pm 3^{\circ}\text{C}$	濡 れ 性 Solder Wetting	浸漬面積の75%以上 75% of immersed area must show no voids, pin holes.
4-3-12	半田耐熱性 Resistance to Soldering Heat	ターミナルまたはピンを本体の取付け基準面より 1.2mm 迄、 $260\pm 5^{\circ}\text{C}$ の半田に 最大5秒 浸す。 Solder Time : 5 5sec. MAX . Solder Temperature : $260\pm 5^{\circ}\text{C}$	外 観 Appearance	端子ガタ割れ等 異常なきこと No Damage

() : 参考規格 Reference Standard

{ } : 参考単位 Reference Unit

【 5. 外観形状、寸法及び材質 PRODUCT SHAPE, DIMENSIONS AND MATERIALS 】

図面参照 Refer to the drawing.

	REVISE ON PC ONLY		TITLE: NEW MINI FIT CONN. -LEAD FREE-製品仕様書		
	A	SEE SHEET 1 OF 8			
			THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	REV.	DESCRIPTION			
DOCUMENT NUMBER PS-5557-043				FILE NAME PS5557043.doc	SHEET 6 OF 8

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE

JAPANESE
ENGLISH

【 6. 挿入力及び抜去力 INSERTION / WITHDRAWAL FORCE 】

極数 No. of CKT.	単位 Unit	挿入力（最大値） Insertion Force (MAX.)			抜去力（最小値） Withdrawal Force (MIN.)		
		初回 1st	6回目 6th	30回目 30th	初回 1st	6回目 6th	30回目 30th
2	N {kgf}	8.8 {0.9}	7.8 {0.8}	7.8 {0.8}	0.7 {0.07}	0.7 {0.07}	0.7 {0.07}
4	N {kgf}	17.6 {1.8}	15.6 {1.6}	15.6 {1.6}	1.4 {0.14}	1.4 {0.14}	1.4 {0.14}
6	N {kgf}	26.4 {2.7}	23.5 {2.4}	23.5 {2.4}	2.1 {0.21}	2.1 {0.21}	2.1 {0.21}
8	N {kgf}	35.3 {3.6}	31.3 {3.2}	31.3 {3.2}	2.8 {0.28}	2.8 {0.28}	2.8 {0.28}
10	N {kgf}	44.1 {4.5}	39.2 {4.0}	39.2 {4.0}	3.5 {0.35}	3.5 {0.35}	3.5 {0.35}
12	N {kgf}	52.9 {5.4}	47.0 {4.8}	47.0 {4.8}	4.2 {0.42}	4.2 {0.42}	4.2 {0.42}
14	N {kgf}	61.8 {6.3}	54.9 {5.6}	54.9 {5.6}	4.8 {0.49}	4.8 {0.49}	4.8 {0.49}
16	N {kgf}	70.6 {7.2}	62.7 {6.4}	62.7 {6.4}	5.5 {0.56}	5.5 {0.56}	5.5 {0.56}
18	N {kgf}	79.4 {8.1}	70.6 {7.2}	70.6 {7.2}	6.2 {0.63}	6.2 {0.63}	6.2 {0.63}
20	N {kgf}	88.2 {9.0}	78.4 {8.0}	78.4 {8.0}	6.9 {0.70}	6.9 {0.70}	6.9 {0.70}
22	N {kgf}	97.1 {9.9}	86.3 {8.8}	86.3 {8.8}	7.6 {0.77}	7.6 {0.77}	7.6 {0.77}
24	N {kgf}	105.9 {10.8}	94.1 {9.6}	94.1 {9.6}	8.3 {0.84}	8.3 {0.84}	8.3 {0.84}

	REVISE ON PC ONLY		TITLE: NEW MINI FIT CONN. -LEAD FREE-製品仕様書	
	A	SEE SHEET 1 OF 8		
	REV.	DESCRIPTION	THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DOCUMENT NUMBER PS-5557-043			FILE NAME PS5557043.doc
EN-37-1(019				

EN-37-1(019)



PRODUCT SPECIFICATION



LANGUAGE


JAPANESE
ENGLISH

REV.	REV. RECORD	DATE	EC NO.	WRITTEN BY :	CHECKED BY :
A	RELEASED	'04/06/17	J2004-4752	J.SASAMORI	K.TOJO

	REVISE ON PC ONLY		TITLE: NEW MINI FIT CONN. -LEAD FREE- 製品仕様書
	A	SEE SHEET 1 OF 8	
	REV.	DESCRIPTION	THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DOCUMENT NUMBER PS-5557-043		FILE NAME PS5557043.doc	SHEET 8 OF 8
---------------------------------------	--	----------------------------	-----------------

EN-37-1(019)

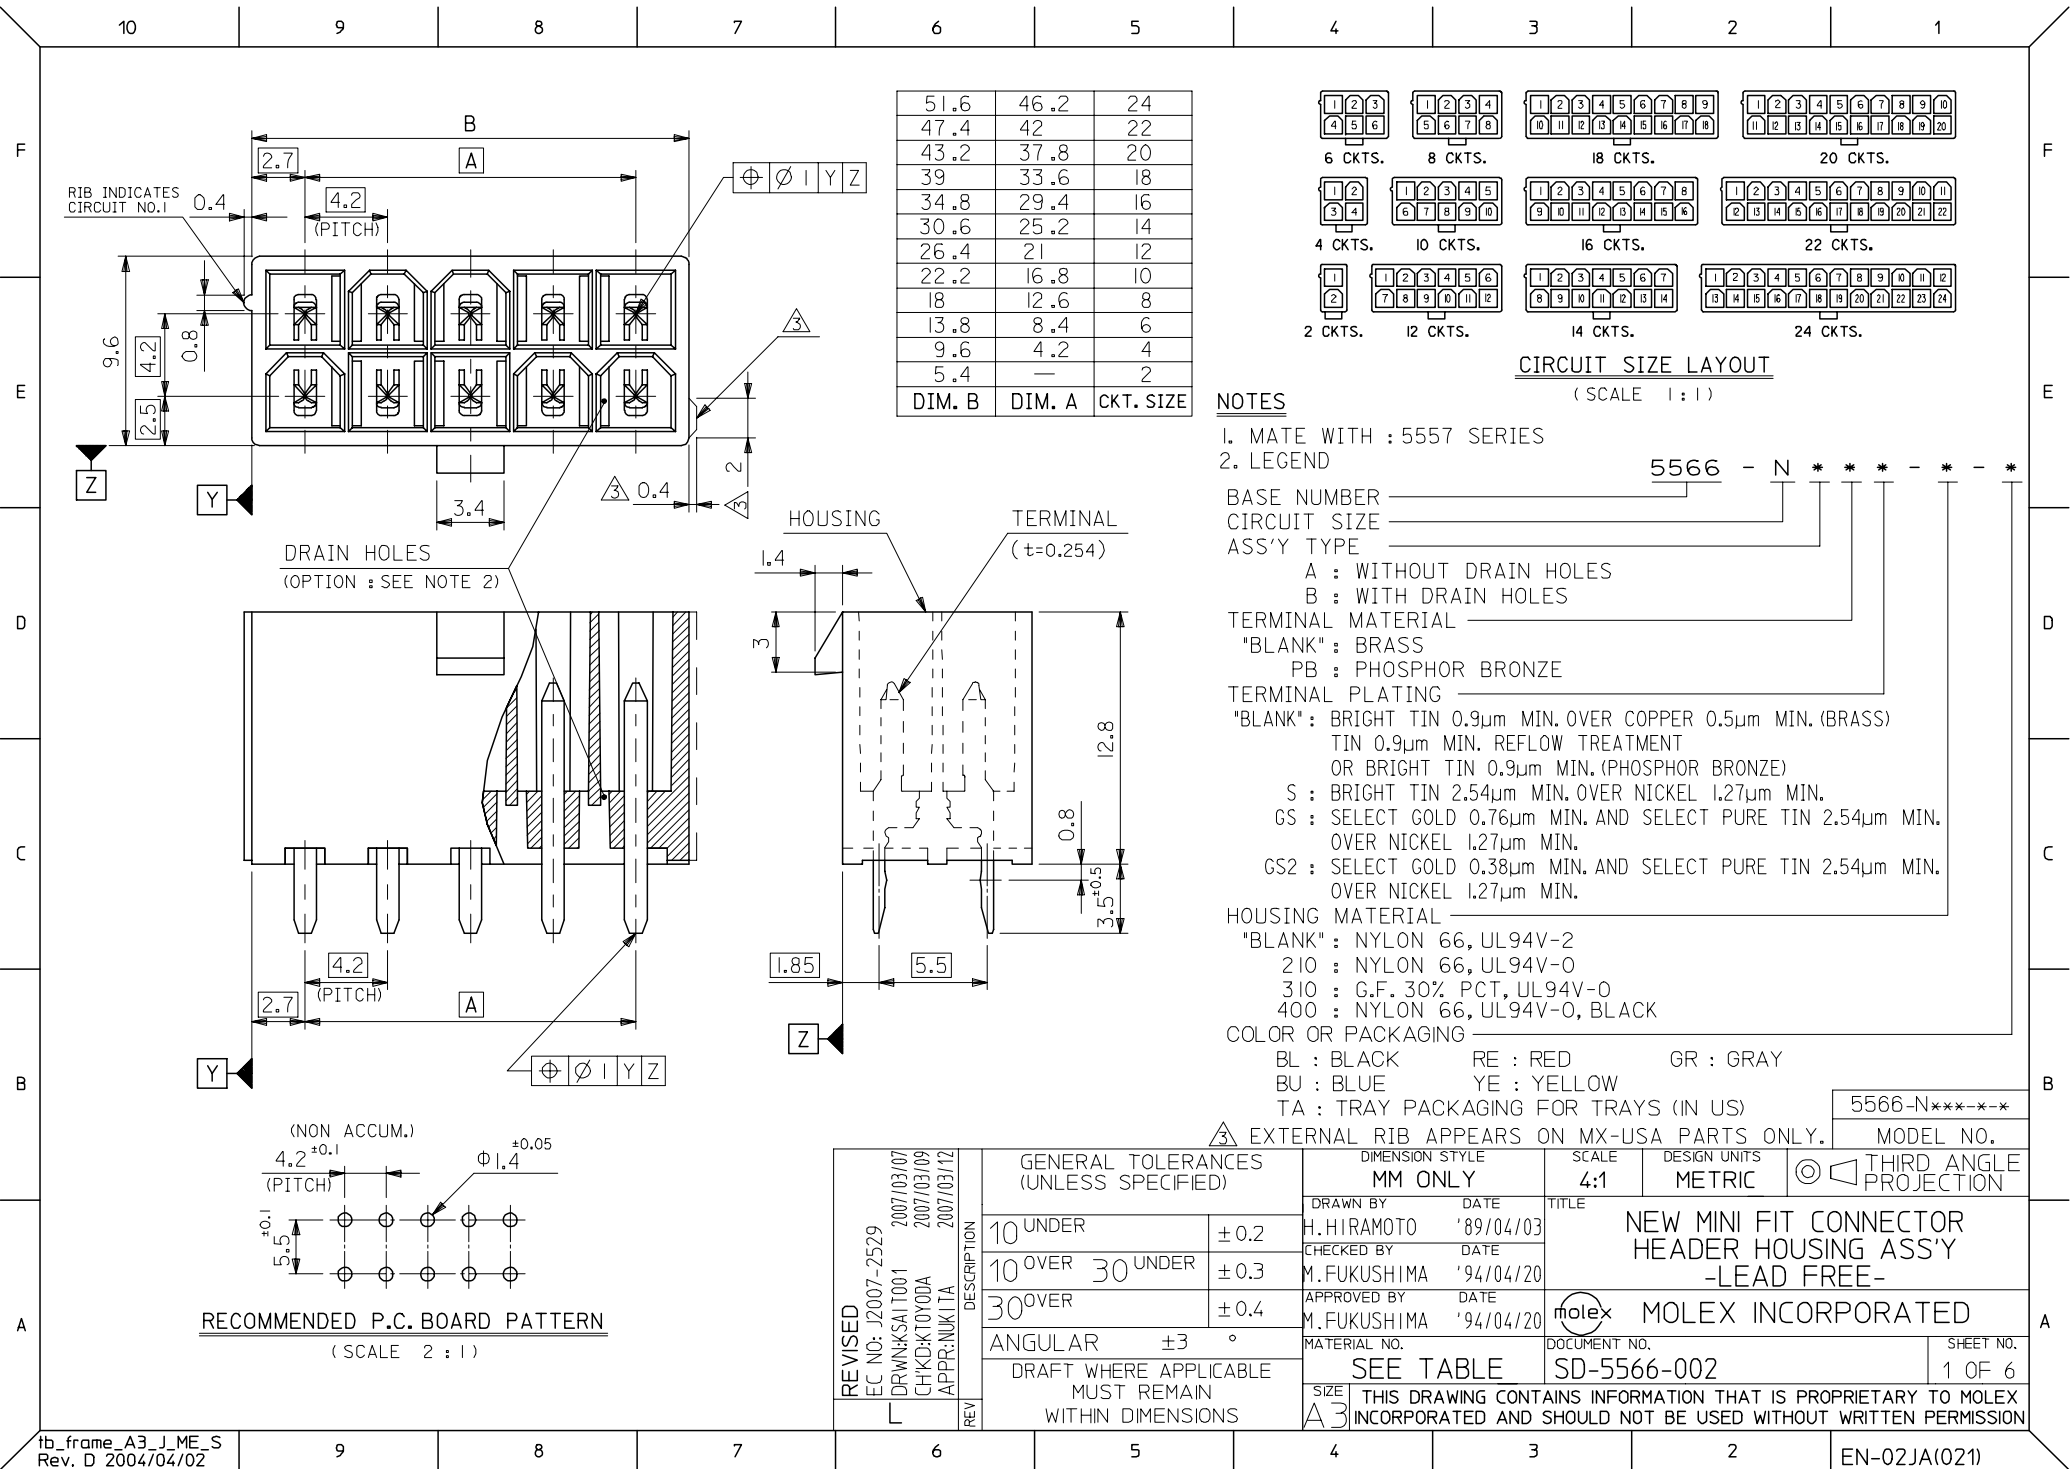

	10	9	8	7	6	5	4	3	2	1	
F	NOT TOOLED	5566-24APB-3 IO	NOT TOOLED	5566-24AGS2-3 IO	NOT TOOLED	5566-24AGS-3 IO	NOT TOOLED	5566-24AS-3 IO	NOT TOOLED	5566-24A-3 IO	24
	↑	↑ -22APB-3 IO	↑	↑ -22AGS2-3 IO	↑	↑ -22AGS-3 IO	↑	↑ -22AS-3 IO	↑	↑ -22A-3 IO	22
		-20APB-3 IO		-20AGS2-3 IO		-20AGS-3 IO		-20AS-3 IO		-20A-3 IO	20
		-18APB-3 IO		-18AGS2-3 IO		-18AGS-3 IO		-18AS-3 IO		-18A-3 IO	18
		-16APB-3 IO		-16AGS2-3 IO		-16AGS-3 IO		-16AS-3 IO		-16A-3 IO	16
		-14APB-3 IO		-14AGS2-3 IO		-14AGS-3 IO		-14AS-3 IO		-14A-3 IO	14
		-12APB-3 IO		-12AGS2-3 IO		-12AGS-3 IO		-12AS-3 IO		-12A-3 IO	12
		-10APB-3 IO		-10AGS2-3 IO		-10AGS-3 IO		-10AS-3 IO		-10A-3 IO	10
		-08APB-3 IO		-08AGS2-3 IO		-08AGS-3 IO		-08AS-3 IO		-08A-3 IO	8
		-06APB-3 IO		-06AGS2-3 IO		-06AGS-3 IO		-06AS-3 IO		-06A-3 IO	6
	↓ -04APB-3 IO		↓ -04AGS2-3 IO		↓ -04AGS-3 IO		↓ -04AS-3 IO		↓ -04A-3 IO	4	
NOT TOOLED	5566-02APB-3 IO	NOT TOOLED	5566-02AGS2-3 IO	NOT TOOLED	5566-02AGS-3 IO	NOT TOOLED	5566-02AS-3 IO	NOT TOOLED	5566-02A-3 IO	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NAPB-3 IO		5566-NAGS2-3 IO		5566-NAGS-3 IO		5566-NAS-3 IO		5566-NA-3 IO			
39-29-5247	5566-24APB-2 IO	39-30-9245	5566-24AGS2-2 IO	39-29-6248	5566-24AGS-2 IO	39-30-6242	5566-24AS-2 IO	39-28-8240	5566-24A-2 IO	24	
↑ -5227	↑ -22APB-2 IO	↑ -9225	↑ -22AGS2-2 IO	↑ -6228	↑ -22AGS-2 IO	↑ -6222	↑ -22AS-2 IO	↑ -8220	↑ -22A-2 IO	22	
-5207	-20APB-2 IO	-9205	-20AGS2-2 IO	-6208	-20AGS-2 IO	-6202	-20AS-2 IO	-8200	-20A-2 IO	20	
-5187	-18APB-2 IO	-9185	-18AGS2-2 IO	-6188	-18AGS-2 IO	-6182	-18AS-2 IO	-8180	-18A-2 IO	18	
-5167	-16APB-2 IO	-9165	-16AGS2-2 IO	-6168	-16AGS-2 IO	-6162	-16AS-2 IO	-8160	-16A-2 IO	16	
-5147	-14APB-2 IO	-9145	-14AGS2-2 IO	-6148	-14AGS-2 IO	-6142	-14AS-2 IO	-8140	-14A-2 IO	14	
-5127	-12APB-2 IO	-9125	-12AGS2-2 IO	-6128	-12AGS-2 IO	-6122	-12AS-2 IO	-8120	-12A-2 IO	12	
-5107	-10APB-2 IO	-9105	-10AGS2-2 IO	-6108	-10AGS-2 IO	-6102	-10AS-2 IO	-8100	-10A-2 IO	10	
-5087	-08APB-2 IO	-9085	-08AGS2-2 IO	-6088	-08AGS-2 IO	-6082	-08AS-2 IO	-8080	-08A-2 IO	8	
-5067	-06APB-2 IO	-9065	-06AGS2-2 IO	-6068	-06AGS-2 IO	-6062	-06AS-2 IO	-8060	-06A-2 IO	6	
↓ -5047	↓ -04APB-2 IO	↓ -9045	↓ -04AGS2-2 IO	↓ -6048	↓ -04AGS-2 IO	↓ -6042	↓ -04AS-2 IO	↓ -8040	↓ -04A-2 IO	4	
39-29-5027	5566-02APB-2 IO	39-30-9025	5566-02AGS2-2 IO	39-29-6028	5566-02AGS-2 IO	39-30-6022	5566-02AS-2 IO	39-28-8020	5566-02A-2 IO	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NAPB-2 IO		5566-NAGS2-2 IO		5566-NAGS-2 IO		5566-NAS-2 IO		5566-NA-2 IO			
39-29-5246	5566-24APB	39-30-9244	5566-24AGS2	39-29-0243	5566-24AGS	39-30-6241	5566-24AS	39-28-1243	5566-24A	24	
↑ -5226	↑ -22APB	↑ -9224	↑ -22AGS2	↑ -0223	↑ -22AGS	↑ -6221	↑ -22AS	↑ -1223	↑ -22A	22	
-5206	-20APB	-9204	-20AGS2	-0203	-20AGS	-6201	-20AS	-1203	-20A	20	
-5186	-18APB	-9184	-18AGS2	-0183	-18AGS	-6181	-18AS	-1183	-18A	18	
-5166	-16APB	-9164	-16AGS2	-0163	-16AGS	-6161	-16AS	-1163	-16A	16	
-5146	-14APB	-9144	-14AGS2	-0143	-14AGS	-6141	-14AS	-1143	-14A	14	
-5126	-12APB	-9124	-12AGS2	-0123	-12AGS	-6121	-12AS	-1123	-12A	12	
-5106	-10APB	-9104	-10AGS2	-0103	-10AGS	-6101	-10AS	-1103	-10A	10	
-5086	-08APB	-9084	-08AGS2	-0083	-08AGS	-6081	-08AS	-1083	-08A	8	
-5066	-06APB	-9064	-06AGS2	-0063	-06AGS	-6061	-06AS	-1063	-06A	6	
↓ -5046	↓ -04APB	↓ -9044	↓ -04AGS2	↓ -0043	↓ -04AGS	↓ -6041	↓ -04AS	↓ -1043	↓ -04A	4	
39-29-5026	5566-02APB	39-30-9024	5566-02AGS2	39-29-0023	5566-02AGS	39-30-6021	5566-02AS	39-28-1023	5566-02A	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NAPB		5566-NAGS2		5566-NAGS		5566-NAS		5566-NA			

REVISED	EC NO: J2007-2529	DRWNG SAI T001	CHKDK TOYODA	APPR: NUKITA	2007/03/12	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION												
						10 UNDER	± ---	DRAWN BY H. HIRAMOTO	DATE '89/04/03	TITLE NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-														
						10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '94/04/20															
						30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '94/04/20															
						ANGULAR	± --- °	MATERIAL NO.		DOCUMENT NO. SD-5566-002														
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE																
						L	REV	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															

tb_frame_A3_J_ME_S Rev. D 2004/04/02	9	8	7	6	5	4	3	2	EN-02JA(021)	
---	---	---	---	---	---	---	---	---	--------------	--

	10	9	8	7	6	5	4	3	2	1	
F	NOT TOOLED	5566-24BGS2-3 IO	NOT TOOLED	5566-24BGS-3 IO	NOT TOOLED	5566-24BS-3 IO	NOT TOOLED	5566-24B-3 IO	NOT TOOLED	5566-24APBS-3 IO	24
	↑	↑ -22BGS2-3 IO	↑	↑ -22BGS-3 IO	↑	↑ -22BS-3 IO	↑	↑ -22B-3 IO	↑	↑ -22APBS-3 IO	22
		↑ -20BGS2-3 IO		↑ -20BGS-3 IO		↑ -20BS-3 IO		↑ -20B-3 IO		↑ -20APBS-3 IO	20
		↑ -18BGS2-3 IO		↑ -18BGS-3 IO		↑ -18BS-3 IO		↑ -18B-3 IO		↑ -18APBS-3 IO	18
		↑ -16BGS2-3 IO		↑ -16BGS-3 IO		↑ -16BS-3 IO		↑ -16B-3 IO		↑ -16APBS-3 IO	16
		↑ -14BGS2-3 IO		↑ -14BGS-3 IO		↑ -14BS-3 IO		↑ -14B-3 IO		↑ -14APBS-3 IO	14
		↑ -12BGS2-3 IO		↑ -12BGS-3 IO		↑ -12BS-3 IO		↑ -12B-3 IO		↑ -12APBS-3 IO	12
		↑ -10BGS2-3 IO		↑ -10BGS-3 IO		↑ -10BS-3 IO		↑ -10B-3 IO		↑ -10APBS-3 IO	10
		↑ -08BGS2-3 IO		↑ -08BGS-3 IO		↑ -08BS-3 IO		↑ -08B-3 IO		↑ -08APBS-3 IO	8
		↑ -06BGS2-3 IO		↑ -06BGS-3 IO		↑ -06BS-3 IO		↑ -06B-3 IO		↑ -06APBS-3 IO	6
	↓ -04BGS2-3 IO		↓ -04BGS-3 IO		↓ -04BS-3 IO		↓ -04B-3 IO		↓ -04APBS-3 IO	4	
NOT TOOLED	5566-02BGS2-3 IO	NOT TOOLED	5566-02BGS-3 IO	NOT TOOLED	5566-02BS-3 IO	NOT TOOLED	5566-02B-3 IO	NOT TOOLED	5566-02APBS-3 IO	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NBGS2-3 IO		5566-NBGS-3 IO		5566-NBS-3 IO		5566-NB-3 IO		5566-NAPBS-3 IO			
39-30-9247	5566-24BGS2-2 IO	39-31-0248	5566-24BGS-2 IO	39-31-0242	5566-24BS-2 IO	39-31-0240	5566-24B-2 IO	39-30-6244	5566-24APBS-2 IO	24	
↑ -9227	↑ -22BGS2-2 IO	↑ -0228	↑ -22BGS-2 IO	↑ -0222	↑ -22BS-2 IO	↑ -0220	↑ -22B-2 IO	↑ -6224	↑ -22APBS-2 IO	22	
↑ -9207	↑ -20BGS2-2 IO	↑ -0208	↑ -20BGS-2 IO	↑ -0202	↑ -20BS-2 IO	↑ -0200	↑ -20B-2 IO	↑ -6204	↑ -20APBS-2 IO	20	
↑ -9187	↑ -18BGS2-2 IO	↑ -0188	↑ -18BGS-2 IO	↑ -0182	↑ -18BS-2 IO	↑ -0180	↑ -18B-2 IO	↑ -6184	↑ -18APBS-2 IO	18	
↑ -9167	↑ -16BGS2-2 IO	↑ -0168	↑ -16BGS-2 IO	↑ -0162	↑ -16BS-2 IO	↑ -0160	↑ -16B-2 IO	↑ -6164	↑ -16APBS-2 IO	16	
↑ -9147	↑ -14BGS2-2 IO	↑ -0148	↑ -14BGS-2 IO	↑ -0142	↑ -14BS-2 IO	↑ -0140	↑ -14B-2 IO	↑ -6144	↑ -14APBS-2 IO	14	
↑ -9127	↑ -12BGS2-2 IO	↑ -0128	↑ -12BGS-2 IO	↑ -0122	↑ -12BS-2 IO	↑ -0120	↑ -12B-2 IO	↑ -6124	↑ -12APBS-2 IO	12	
↑ -9107	↑ -10BGS2-2 IO	↑ -0108	↑ -10BGS-2 IO	↑ -0102	↑ -10BS-2 IO	↑ -0100	↑ -10B-2 IO	↑ -6104	↑ -10APBS-2 IO	10	
↑ -9087	↑ -08BGS2-2 IO	↑ -0088	↑ -08BGS-2 IO	↑ -0082	↑ -08BS-2 IO	↑ -0080	↑ -08B-2 IO	↑ -6084	↑ -08APBS-2 IO	8	
↑ -9067	↑ -06BGS2-2 IO	↑ -0068	↑ -06BGS-2 IO	↑ -0062	↑ -06BS-2 IO	↑ -0060	↑ -06B-2 IO	↑ -6064	↑ -06APBS-2 IO	6	
↓ -9047	↓ -04BGS2-2 IO	↓ -0048	↓ -04BGS-2 IO	↓ -0042	↓ -04BS-2 IO	↓ -0040	↓ -04B-2 IO	↓ -6044	↓ -04APBS-2 IO	4	
39-30-9027	5566-02BGS2-2 IO	39-31-0028	5566-02BGS-2 IO	39-31-0022	5566-02BS-2 IO	39-31-0020	5566-02B-2 IO	39-30-6024	5566-02APBS-2 IO	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NBGS2-2 IO		5566-NBGS-2 IO		5566-NBS-2 IO		5566-NB-2 IO		5566-NAPBS-2 IO			
39-30-9246	5566-24BGS2	39-31-0247	5566-24BGS	39-31-0241	5566-24BS	39-29-3246	5566-24B	39-30-6243	5566-24APBS	24	
↑ -9226	↑ -22BGS2	↑ -0227	↑ -22BGS	↑ -0221	↑ -22BS	↑ -3226	↑ -22B	↑ -6223	↑ -22APBS	22	
↑ -9206	↑ -20BGS2	↑ -0207	↑ -20BGS	↑ -0201	↑ -20BS	↑ -3206	↑ -20B	↑ -6203	↑ -20APBS	20	
↑ -9186	↑ -18BGS2	↑ -0187	↑ -18BGS	↑ -0181	↑ -18BS	↑ -3186	↑ -18B	↑ -6183	↑ -18APBS	18	
↑ -9166	↑ -16BGS2	↑ -0164	↑ -16BGS	↑ -0161	↑ -16BS	↑ -3166	↑ -16B	↑ -6163	↑ -16APBS	16	
↑ -9146	↑ -14BGS2	↑ -0147	↑ -14BGS	↑ -0141	↑ -14BS	↑ -3146	↑ -14B	↑ -6143	↑ -14APBS	14	
↑ -9126	↑ -12BGS2	↑ -0127	↑ -12BGS	↑ -0121	↑ -12BS	↑ -3126	↑ -12B	↑ -6123	↑ -12APBS	12	
↑ -9106	↑ -10BGS2	↑ -0107	↑ -10BGS	↑ -0101	↑ -10BS	↑ -3106	↑ -10B	↑ -6103	↑ -10APBS	10	
↑ -9086	↑ -08BGS2	↑ -0087	↑ -08BGS	↑ -0081	↑ -08BS	↑ -3086	↑ -08B	↑ -6083	↑ -08APBS	8	
↑ -9066	↑ -06BGS2	↑ -0067	↑ -06BGS	↑ -0061	↑ -06BS	↑ -3066	↑ -06B	↑ -6063	↑ -06APBS	6	
↓ -9046	↓ -04BGS2	↓ -0047	↓ -04BGS	↓ -0041	↓ -04BS	↓ -3046	↓ -04B	↓ -6043	↓ -04APBS	4	
39-30-9026	5566-02BGS2	39-31-0027	5566-02BGS	39-31-0021	5566-02BS	39-29-3026	5566-02B	39-30-6023	5566-02APBS	2	
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	
5566-NBGS2		5566-NBGS		5566-NBS		5566-NB		5566-NAPBS			



REVISED	EC NO.: J2007-2529	DRW:KSAI.T001	2007/03/07	CHK:CKT10Y00A	2007/03/09	APP:NUKI.TA	2007/03/12	REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
									10 UNDER	± ---	DRAWN BY H. HIRAMOTO	DATE '89/04/03	NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-		
									10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '94/04/20			
									30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '94/04/20			
									ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5566-002		3 OF 6									
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

tb_frame_A3_J_ME_S Rev. D 2004/04/02	9	8	7	6	5	4	3	2	EN-02JA(021)	
---	---	---	---	---	---	---	---	---	--------------	--



[illegible]

[illegible]

	10	9	8	7	6	5	4	3	2	1																																																																																																																																																																																																																																																																																																																								
F											F																																																																																																																																																																																																																																																																																																																							
E											E																																																																																																																																																																																																																																																																																																																							
D											D																																																																																																																																																																																																																																																																																																																							
C											C																																																																																																																																																																																																																																																																																																																							
B											B																																																																																																																																																																																																																																																																																																																							
A											A																																																																																																																																																																																																																																																																																																																							
<table><tr><td>39-54-0245</td><td>5566-24BGS-210-TA</td><td>39-54-0244</td><td>5566-24B-210-TA</td><td>39-54-0243</td><td>5566-24BGS-TA</td><td>39-54-0242</td><td>5566-24B-TA</td><td>24</td></tr><tr><td>▲ -0225</td><td>▲ -22BGS-210-TA</td><td>▲ -0224</td><td>▲ -22B-210-TA</td><td>▲ -0223</td><td>▲ -22BGS-TA</td><td>▲ -0222</td><td>▲ -22B-TA</td><td>22</td></tr><tr><td>-0205</td><td>-20BGS-210-TA</td><td>-0204</td><td>-20B-210-TA</td><td>-0203</td><td>-20BGS-TA</td><td>-0202</td><td>-20B-TA</td><td>20</td></tr><tr><td>-0185</td><td>-18BGS-210-TA</td><td>-0184</td><td>-18B-210-TA</td><td>-0183</td><td>-18BGS-TA</td><td>-0182</td><td>-18B-TA</td><td>18</td></tr><tr><td>-0165</td><td>-16BGS-210-TA</td><td>-0164</td><td>-16B-210-TA</td><td>-0163</td><td>-16BGS-TA</td><td>-0162</td><td>-16B-TA</td><td>16</td></tr><tr><td>-0145</td><td>-14BGS-210-TA</td><td>-0144</td><td>-14B-210-TA</td><td>-0143</td><td>-14BGS-TA</td><td>-0142</td><td>-14B-TA</td><td>14</td></tr><tr><td>-0125</td><td>-12BGS-210-TA</td><td>-0124</td><td>-12B-210-TA</td><td>-0123</td><td>-12BGS-TA</td><td>-0122</td><td>-12B-TA</td><td>12</td></tr><tr><td>-0105</td><td>-10BGS-210-TA</td><td>-0104</td><td>-10B-210-TA</td><td>-0103</td><td>-10BGS-TA</td><td>-0102</td><td>-10B-TA</td><td>10</td></tr><tr><td>-0085</td><td>-08BGS-210-TA</td><td>-0084</td><td>-08B-210-TA</td><td>-0083</td><td>-08BGS-TA</td><td>-0082</td><td>-08B-TA</td><td>8</td></tr><tr><td>-0065</td><td>-06BGS-210-TA</td><td>-0064</td><td>-06B-210-TA</td><td>-0063</td><td>-06BGS-TA</td><td>-0062</td><td>-06B-TA</td><td>6</td></tr><tr><td>▼ -0045</td><td>▼ -04BGS-210-TA</td><td>▼ -0044</td><td>▼ -04B-210-TA</td><td>▼ -0043</td><td>▼ -04BGS-TA</td><td>▼ -0042</td><td>▼ -04B-TA</td><td>4</td></tr><tr><td>39-54-0025</td><td>5566-02BGS-210-TA</td><td>39-54-0024</td><td>5566-02B-210-TA</td><td>39-54-0023</td><td>5566-02BGS-TA</td><td>39-54-0022</td><td>5566-02B-TA</td><td>2</td></tr><tr><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>CKT. SIZE</td></tr><tr><td colspan="2">5566-NBGS-210-TA</td><td colspan="2">5566-NB-210-TA</td><td colspan="2">5566-NBGS-TA</td><td colspan="2">5566-NB-TA</td><td></td></tr></table> <table><tr><td>39-54-0241</td><td>5566-24AGS-210-TA</td><td>39-54-0240</td><td>5566-24AGS-TA</td><td>39-53-9249</td><td>5566-24A-210-TA</td><td>39-53-9248</td><td>5566-24A-TA</td><td>24</td></tr><tr><td>▲ -0221</td><td>▲ -22AGS-210-TA</td><td>▲ -0220</td><td>▲ -22AGS-TA</td><td>▲ -9229</td><td>▲ -22A-210-TA</td><td>▲ -9228</td><td>▲ -22A-TA</td><td>22</td></tr><tr><td>-0201</td><td>-20AGS-210-TA</td><td>-0200</td><td>-20AGS-TA</td><td>-9209</td><td>-20A-210-TA</td><td>-9208</td><td>-20A-TA</td><td>20</td></tr><tr><td>-0181</td><td>-18AGS-210-TA</td><td>-0180</td><td>-18AGS-TA</td><td>-9189</td><td>-18A-210-TA</td><td>-9188</td><td>-18A-TA</td><td>18</td></tr><tr><td>-0161</td><td>-16AGS-210-TA</td><td>-0160</td><td>-16AGS-TA</td><td>-9169</td><td>-16A-210-TA</td><td>-9168</td><td>-16A-TA</td><td>16</td></tr><tr><td>-0141</td><td>-14AGS-210-TA</td><td>-0140</td><td>-14AGS-TA</td><td>-9149</td><td>-14A-210-TA</td><td>-9148</td><td>-14A-TA</td><td>14</td></tr><tr><td>-0121</td><td>-12AGS-210-TA</td><td>-0120</td><td>-12AGS-TA</td><td>-9129</td><td>-12A-210-TA</td><td>-9128</td><td>-12A-TA</td><td>12</td></tr><tr><td>-0101</td><td>-10AGS-210-TA</td><td>-0100</td><td>-10AGS-TA</td><td>-9109</td><td>-10A-210-TA</td><td>-9108</td><td>-10A-TA</td><td>10</td></tr><tr><td>-0081</td><td>-08AGS-210-TA</td><td>-0080</td><td>-08AGS-TA</td><td>-9089</td><td>-08A-210-TA</td><td>-9088</td><td>-08A-TA</td><td>8</td></tr><tr><td>-0061</td><td>-06AGS-210-TA</td><td>-0060</td><td>-06AGS-TA</td><td>-9069</td><td>-06A-210-TA</td><td>-9068</td><td>-06A-TA</td><td>6</td></tr><tr><td>▼ -0041</td><td>▼ -04AGS-210-TA</td><td>▼ -0040</td><td>▼ -04AGS-TA</td><td>▼ -9049</td><td>▼ -04A-210-TA</td><td>▼ -9048</td><td>▼ -04A-TA</td><td>4</td></tr><tr><td>39-54-0021</td><td>5566-02AGS-210-TA</td><td>39-54-0020</td><td>5566-02AGS-TA</td><td>39-53-9029</td><td>5566-02A-210-TA</td><td>39-53-9028</td><td>5566-02A-TA</td><td>2</td></tr><tr><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>EDP NO.</td><td>ENG. NO.</td><td>CKT. SIZE</td></tr><tr><td colspan="2">5566-NAGS-210-TA</td><td colspan="2">5566-NAGS-TA</td><td colspan="2">5566-NA-210-TA</td><td colspan="2">5566-NA-TA</td><td></td></tr></table> <table><tr><td rowspan="5">REVISED EC NO: J2007-2529 DRWNG SAI T001 2007/03/07 CHKDK TOYODA 2007/03/09 APPR: NUKITA 2007/03/12</td><td rowspan="5">DESCRIPTION REV</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM ONLY</td><td>SCALE ---</td><td>DESIGN UNITS METRIC</td><td rowspan="2"> THIRD ANGLE PROJECTION</td></tr><tr><td>10 UNDER</td><td>± ---</td><td>DRAWN BY H. HIRAMOTO</td><td>DATE '89/04/03</td><td colspan="2" rowspan="2">TITLE NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-</td></tr><tr><td>10 OVER 30 UNDER</td><td>± ---</td><td>CHECKED BY M. FUKUSHIMA</td><td>DATE '94/04/20</td></tr><tr><td>30 OVER</td><td>± ---</td><td>APPROVED BY M. FUKUSHIMA</td><td>DATE '94/04/20</td><td colspan="2" rowspan="2"> MOLEX INCORPORATED</td></tr><tr><td>ANGULAR</td><td>± --- °</td><td colspan="2">MATERIAL NO.</td><td colspan="2">DOCUMENT NO.</td></tr><tr><td colspan="2">5566-N*****</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">SEE TABLE</td><td colspan="2">SD-5566-002</td><td>SHEET NO. 6 OF 6</td></tr><tr><td colspan="2">MODEL NO.</td><td colspan="2">L</td><td colspan="2">SIZE A3</td><td colspan="3">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>												39-54-0245	5566-24BGS-210-TA	39-54-0244	5566-24B-210-TA	39-54-0243	5566-24BGS-TA	39-54-0242	5566-24B-TA	24	▲ -0225	▲ -22BGS-210-TA	▲ -0224	▲ -22B-210-TA	▲ -0223	▲ -22BGS-TA	▲ -0222	▲ -22B-TA	22	-0205	-20BGS-210-TA	-0204	-20B-210-TA	-0203	-20BGS-TA	-0202	-20B-TA	20	-0185	-18BGS-210-TA	-0184	-18B-210-TA	-0183	-18BGS-TA	-0182	-18B-TA	18	-0165	-16BGS-210-TA	-0164	-16B-210-TA	-0163	-16BGS-TA	-0162	-16B-TA	16	-0145	-14BGS-210-TA	-0144	-14B-210-TA	-0143	-14BGS-TA	-0142	-14B-TA	14	-0125	-12BGS-210-TA	-0124	-12B-210-TA	-0123	-12BGS-TA	-0122	-12B-TA	12	-0105	-10BGS-210-TA	-0104	-10B-210-TA	-0103	-10BGS-TA	-0102	-10B-TA	10	-0085	-08BGS-210-TA	-0084	-08B-210-TA	-0083	-08BGS-TA	-0082	-08B-TA	8	-0065	-06BGS-210-TA	-0064	-06B-210-TA	-0063	-06BGS-TA	-0062	-06B-TA	6	▼ -0045	▼ -04BGS-210-TA	▼ -0044	▼ -04B-210-TA	▼ -0043	▼ -04BGS-TA	▼ -0042	▼ -04B-TA	4	39-54-0025	5566-02BGS-210-TA	39-54-0024	5566-02B-210-TA	39-54-0023	5566-02BGS-TA	39-54-0022	5566-02B-TA	2	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	5566-NBGS-210-TA		5566-NB-210-TA		5566-NBGS-TA		5566-NB-TA			39-54-0241	5566-24AGS-210-TA	39-54-0240	5566-24AGS-TA	39-53-9249	5566-24A-210-TA	39-53-9248	5566-24A-TA	24	▲ -0221	▲ -22AGS-210-TA	▲ -0220	▲ -22AGS-TA	▲ -9229	▲ -22A-210-TA	▲ -9228	▲ -22A-TA	22	-0201	-20AGS-210-TA	-0200	-20AGS-TA	-9209	-20A-210-TA	-9208	-20A-TA	20	-0181	-18AGS-210-TA	-0180	-18AGS-TA	-9189	-18A-210-TA	-9188	-18A-TA	18	-0161	-16AGS-210-TA	-0160	-16AGS-TA	-9169	-16A-210-TA	-9168	-16A-TA	16	-0141	-14AGS-210-TA	-0140	-14AGS-TA	-9149	-14A-210-TA	-9148	-14A-TA	14	-0121	-12AGS-210-TA	-0120	-12AGS-TA	-9129	-12A-210-TA	-9128	-12A-TA	12	-0101	-10AGS-210-TA	-0100	-10AGS-TA	-9109	-10A-210-TA	-9108	-10A-TA	10	-0081	-08AGS-210-TA	-0080	-08AGS-TA	-9089	-08A-210-TA	-9088	-08A-TA	8	-0061	-06AGS-210-TA	-0060	-06AGS-TA	-9069	-06A-210-TA	-9068	-06A-TA	6	▼ -0041	▼ -04AGS-210-TA	▼ -0040	▼ -04AGS-TA	▼ -9049	▼ -04A-210-TA	▼ -9048	▼ -04A-TA	4	39-54-0021	5566-02AGS-210-TA	39-54-0020	5566-02AGS-TA	39-53-9029	5566-02A-210-TA	39-53-9028	5566-02A-TA	2	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE	5566-NAGS-210-TA		5566-NAGS-TA		5566-NA-210-TA		5566-NA-TA			REVISED EC NO: J2007-2529 DRWNG SAI T001 2007/03/07 CHKDK TOYODA 2007/03/09 APPR: NUKITA 2007/03/12	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	10 UNDER	± ---	DRAWN BY H. HIRAMOTO	DATE '89/04/03	TITLE NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-		10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '94/04/20	30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '94/04/20	MOLEX INCORPORATED		ANGULAR	± --- °	MATERIAL NO.		DOCUMENT NO.		5566-N*****		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5566-002		SHEET NO. 6 OF 6	MODEL NO.		L		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
39-54-0245	5566-24BGS-210-TA	39-54-0244	5566-24B-210-TA	39-54-0243	5566-24BGS-TA	39-54-0242	5566-24B-TA	24																																																																																																																																																																																																																																																																																																																										
▲ -0225	▲ -22BGS-210-TA	▲ -0224	▲ -22B-210-TA	▲ -0223	▲ -22BGS-TA	▲ -0222	▲ -22B-TA	22																																																																																																																																																																																																																																																																																																																										
-0205	-20BGS-210-TA	-0204	-20B-210-TA	-0203	-20BGS-TA	-0202	-20B-TA	20																																																																																																																																																																																																																																																																																																																										
-0185	-18BGS-210-TA	-0184	-18B-210-TA	-0183	-18BGS-TA	-0182	-18B-TA	18																																																																																																																																																																																																																																																																																																																										
-0165	-16BGS-210-TA	-0164	-16B-210-TA	-0163	-16BGS-TA	-0162	-16B-TA	16																																																																																																																																																																																																																																																																																																																										
-0145	-14BGS-210-TA	-0144	-14B-210-TA	-0143	-14BGS-TA	-0142	-14B-TA	14																																																																																																																																																																																																																																																																																																																										
-0125	-12BGS-210-TA	-0124	-12B-210-TA	-0123	-12BGS-TA	-0122	-12B-TA	12																																																																																																																																																																																																																																																																																																																										
-0105	-10BGS-210-TA	-0104	-10B-210-TA	-0103	-10BGS-TA	-0102	-10B-TA	10																																																																																																																																																																																																																																																																																																																										
-0085	-08BGS-210-TA	-0084	-08B-210-TA	-0083	-08BGS-TA	-0082	-08B-TA	8																																																																																																																																																																																																																																																																																																																										
-0065	-06BGS-210-TA	-0064	-06B-210-TA	-0063	-06BGS-TA	-0062	-06B-TA	6																																																																																																																																																																																																																																																																																																																										
▼ -0045	▼ -04BGS-210-TA	▼ -0044	▼ -04B-210-TA	▼ -0043	▼ -04BGS-TA	▼ -0042	▼ -04B-TA	4																																																																																																																																																																																																																																																																																																																										
39-54-0025	5566-02BGS-210-TA	39-54-0024	5566-02B-210-TA	39-54-0023	5566-02BGS-TA	39-54-0022	5566-02B-TA	2																																																																																																																																																																																																																																																																																																																										
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE																																																																																																																																																																																																																																																																																																																										
5566-NBGS-210-TA		5566-NB-210-TA		5566-NBGS-TA		5566-NB-TA																																																																																																																																																																																																																																																																																																																												
39-54-0241	5566-24AGS-210-TA	39-54-0240	5566-24AGS-TA	39-53-9249	5566-24A-210-TA	39-53-9248	5566-24A-TA	24																																																																																																																																																																																																																																																																																																																										
▲ -0221	▲ -22AGS-210-TA	▲ -0220	▲ -22AGS-TA	▲ -9229	▲ -22A-210-TA	▲ -9228	▲ -22A-TA	22																																																																																																																																																																																																																																																																																																																										
-0201	-20AGS-210-TA	-0200	-20AGS-TA	-9209	-20A-210-TA	-9208	-20A-TA	20																																																																																																																																																																																																																																																																																																																										
-0181	-18AGS-210-TA	-0180	-18AGS-TA	-9189	-18A-210-TA	-9188	-18A-TA	18																																																																																																																																																																																																																																																																																																																										
-0161	-16AGS-210-TA	-0160	-16AGS-TA	-9169	-16A-210-TA	-9168	-16A-TA	16																																																																																																																																																																																																																																																																																																																										
-0141	-14AGS-210-TA	-0140	-14AGS-TA	-9149	-14A-210-TA	-9148	-14A-TA	14																																																																																																																																																																																																																																																																																																																										
-0121	-12AGS-210-TA	-0120	-12AGS-TA	-9129	-12A-210-TA	-9128	-12A-TA	12																																																																																																																																																																																																																																																																																																																										
-0101	-10AGS-210-TA	-0100	-10AGS-TA	-9109	-10A-210-TA	-9108	-10A-TA	10																																																																																																																																																																																																																																																																																																																										
-0081	-08AGS-210-TA	-0080	-08AGS-TA	-9089	-08A-210-TA	-9088	-08A-TA	8																																																																																																																																																																																																																																																																																																																										
-0061	-06AGS-210-TA	-0060	-06AGS-TA	-9069	-06A-210-TA	-9068	-06A-TA	6																																																																																																																																																																																																																																																																																																																										
▼ -0041	▼ -04AGS-210-TA	▼ -0040	▼ -04AGS-TA	▼ -9049	▼ -04A-210-TA	▼ -9048	▼ -04A-TA	4																																																																																																																																																																																																																																																																																																																										
39-54-0021	5566-02AGS-210-TA	39-54-0020	5566-02AGS-TA	39-53-9029	5566-02A-210-TA	39-53-9028	5566-02A-TA	2																																																																																																																																																																																																																																																																																																																										
EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	EDP NO.	ENG. NO.	CKT. SIZE																																																																																																																																																																																																																																																																																																																										
5566-NAGS-210-TA		5566-NAGS-TA		5566-NA-210-TA		5566-NA-TA																																																																																																																																																																																																																																																																																																																												
REVISED EC NO: J2007-2529 DRWNG SAI T001 2007/03/07 CHKDK TOYODA 2007/03/09 APPR: NUKITA 2007/03/12	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																																																																																																																																																																																																																																																																																										
		10 UNDER	± ---	DRAWN BY H. HIRAMOTO	DATE '89/04/03	TITLE NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y -LEAD FREE-																																																																																																																																																																																																																																																																																																																												
		10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '94/04/20																																																																																																																																																																																																																																																																																																																													
		30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '94/04/20	MOLEX INCORPORATED																																																																																																																																																																																																																																																																																																																												
		ANGULAR	± --- °	MATERIAL NO.				DOCUMENT NO.																																																																																																																																																																																																																																																																																																																										
5566-N*****		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-5566-002		SHEET NO. 6 OF 6																																																																																																																																																																																																																																																																																																																										
MODEL NO.		L		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																																																																																																																																																																																																												
tb_frame_A3_J_ME_S Rev. E 2006/04/15	9	8	7	6	5	4	3	2	EN-02JA(021)																																																																																																																																																																																																																																																																																																																									

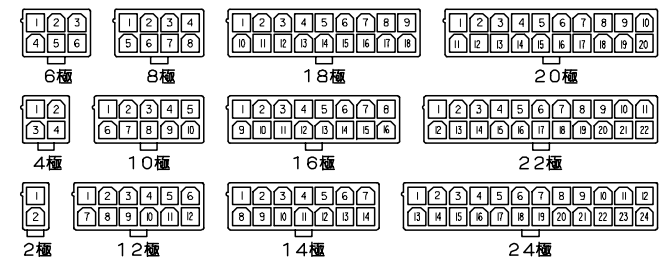

極数別レイアウト☒
(SCALE 1:1)

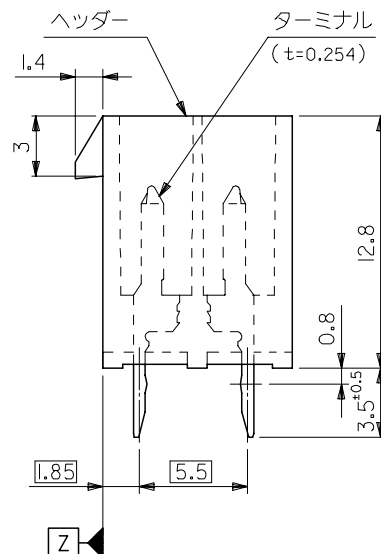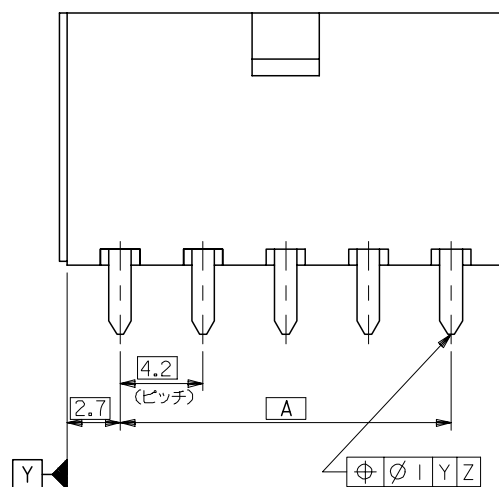

注 記

1. 嵌合相手：5557シリーズ
2. 使用符号の説明

2. 使用符号の説明 5566 - N A * * - * - *

ベースナンバー

[illegible]

アッサンブリー

ターミナル材料 _____

"BLANK": 黄銅	
-------------	--

PB : リン青銅		
-----------	--	--

ターミナルのメッキ _____

"BLANK": 錫メッキ 0.9 μ m MIN.

GS : ニッケル 1.27 μ m MIN. 全面下地

コンタクト部 金 0.76μm MIN.
半田付け部 銀 0.5μm MIN.

手田付付部 錫 2.54μm MIN.

ヘッダー材料 —————
「BLANK」 ナイロン66 III 84V 2

310 : ナイロン 66, UL 94V-0

400 : サイロン 66. III 94V-0. 黒

色 _____

BL : 黒色

BU : 青色

RE : 赤色
YE : 黄色

YE : 黄色
CB : 蓝色

5566-NA*

GR : 灰色	MODEL
---------	-------

DIMENSION STYLE			SCALE	DESIGN UNITS	THIRD ANGLE
-----------------	--	--	-------	--------------	-------------

MM ONLY	4:1	METRIC	© 2017 PROJECT
---------	-----	--------	----------------

DRAWN BY	DATE	TITLE
W. H. RAMSBO	100/05/07	NEW MINI FIT CONNECTOR

H. HIRAMOTO	89705707	NEW MINI TT CONNECTOR
CHECKED BY	DATE	HEADER ASS'Y

CHECKED BY	DATE	HEADER ASS I
M. FUKUSHIMA	'91/10/29	LEAD FREE

APPROVED BY	DATE	() MOLEY INCORPORATED
-------------	------	------------------------

M. ENOMOTO '91/10/29 MOLEX INCORPORATED

MATERIAL NO.	DOCUMENT NO.	S
SEE CHART	SR 5511-003	

SEE CHART	SD-5566-003	1
-----------	-------------	---

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


(A) INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

4	3	2	EN-02JA(02
---	---	---	------------

基板穴推奨寸法

	10	9	8	7	6	5	4	3	2	1			
F									39-35-0248	5566-24A-400	24	F	
									▲ -0228	▲ -22A-400	22		
									-0208	-20A-400	20		
									-0188	-18A-400	18		
									-0168	-16A-400	16		
									-0148	-14A-400	14		
									-0128	-12A-400	12		
									-0108	-10A-400	10		
									-0088	-08A-400	8		
									-0068	-06A-400	6		
E									▼ -0048	▼ -04A-400	4	E	
									39-35-0028	5566-02A-400	2		
									EDP NO.	ENG. NO	極数		
									5566-NA-400				
	39-29-5247	5566-24APB-210	39-29-6248	5566-24AGS-210	39-28-8240	5566-24A-210	24						
	▲ -5227	▲ -22APB-210	▲ -6228	▲ -22AGS-210	▲ -8220	▲ -22A-210	22						
	-5207	-20APB-210	-6208	-20AGS-210	-8200	-20A-210	20						
	-5187	-18APB-210	-6188	-18AGS-210	-8180	-18A-210	18						
	-5167	-16APB-210	-6168	-16AGS-210	-8160	-16A-210	16						
	-5147	-14APB-210	-6148	-14AGS-210	-8140	-14A-210	14						
D	-5127	-12APB-210	-6128	-12AGS-210	-8120	-12A-210	12			D			
	-5107	-10APB-210	-6108	-10AGS-210	-8100	-10A-210	10						
	-5087	-08APB-210	-6088	-08AGS-210	-8080	-08A-210	8						
	-5067	-06APB-210	-6068	-06AGS-210	-8060	-06A-210	6						
	▼ -5047	▼ -04APB-210	▼ -6048	▼ -04AGS-210	▼ -8040	▼ -04A-210	4						
	39-29-5027	5566-02APB-210	39-29-6028	5566-02AGS-210	39-28-8020	5566-02A-210	2						
	EDP NO.	ENG. NO	EDP NO.	ENG. NO	EDP NO.	ENG. NO	極数						
	5566-NAPB-210		5566-NAGS-210		5566-NA-210								
	39-29-5246	5566-24APB	39-29-0243	5566-24AGS	39-28-1243	5566-24A	24						
	C	▲ -5226	▲ -22APB	▲ -0223	▲ -22AGS	▲ -1223	▲ -22A	22				C	
-5206		-20APB	-0203	-20AGS	-1203	-20A	20						
-5186		-18APB	-0183	-18AGS	-1183	-18A	18						
-5166		-16APB	-0163	-16AGS	-1163	-16A	16						
-5146		-14APB	-0143	-14AGS	-1143	-14A	14						
-5126		-12APB	-0123	-12AGS	-1123	-12A	12						
-5106		-10APB	-0103	-10AGS	-1103	-10A	10						
-5086		-08APB	-0083	-08AGS	-1083	-08A	8						
-5066		-06APB	-0063	-06AGS	-1063	-06A	6						
▼ -5046		▼ -04APB	▼ -0043	▼ -04AGS	▼ -1043	▼ -04A	4						
B	39-29-5026	5566-02APB	39-29-0023	5566-02AGS	39-28-1023	5566-02A	2			B			
	EDP NO.	ENG. NO	EDP NO.	ENG. NO	EDP NO.	ENG. NO	極数						
	5566-NAPB		5566-NAGS		5566-NA								
A											A		
	REVISED EC NO: J2006-2418 DRWN: NABEI CHKD: KTOYODA APPR: NUKITA H	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
			10 UNDER	± ---	DRAWN BY H. HIRAMOTO	DATE '89/05/07	TITLE NEW MINI FIT CONNECTOR HEADER ASS'Y -LEAD FREE-						
			10 OVER 30 UNDER	± ---	CHECKED BY M. FUKUSHIMA	DATE '91/10/29							
			30 OVER	± ---	APPROVED BY M. ENOMOTO	DATE '91/10/29	molex MOLEX INCORPORATED						
			ANGULAR ± --- °	MATERIAL NO.		DOCUMENT NO.						SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-5566-003		2 OF 3				
			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
</													

[illegible]

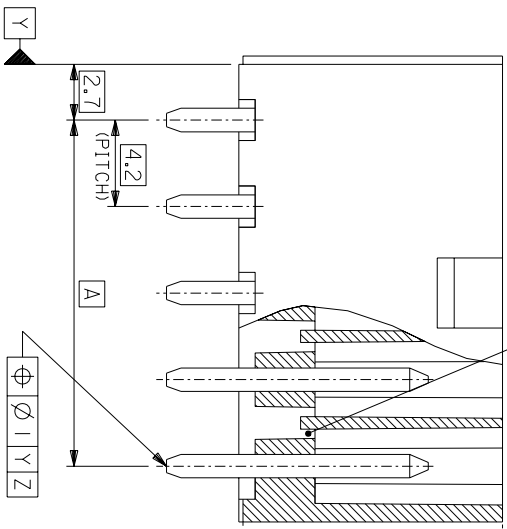

2 CKTS, 12 CKTS, 14 CKTS, 24 CKTS, 6 CKTS, 8 CKTS, 10 CKTS, 16 CKTS, 22 CKTS, 20 CKTS.

材料 MATERIAL	MOLEX-JAPAN CO.,LTD. モレックス
----------------	-------------------------------

5566-N * * * * *	
MODEL NO.	
角度	ANGLE
30 以上	30°
10 以上	10.4
10 over 30 UNDER	10.5
未滿	10.3
10 UNDER	10.2
一般公差	
GENERAL TOLERANCES	

THIS DOCUMENT CONTAINS NEITHER RECOMMENDATIONS NOR
CONCLUSIONS OF THE NATIONAL BUREAU OF STANDARDS
4

DWG. NO.
SD-5566-N****-


MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

NOT TOOLED		5566-24BPS-310	NOT TOOLED	5566-24BPB-310	24	
	▲	-22BPS-310		▲	-22BPB-310	22
		-20BPS-310			-20BPB-310	20
		-18BPS-310			-18BPB-310	18
		-16BPS-310			-16BPB-310	16
		-14BPS-310			-14BPB-310	14
		-12BPS-310			-12BPB-310	12
		-10BPS-310			-10BPB-310	10
		-08BPS-310			-08BPB-310	8
		-06BPS-310			-06BPB-310	6
	▼	-04BPS-310		▼	-04BPB-310	4
NOT TOOLED		5566-02BPS-310	NOT TOOLED	5566-02BPB-310	2	
EDP NO.		ENG. NO	EDP NO.		ENG. NO	CKT. SIZE
5566-NBPS-310			5566-NBPB-310			
39-31-0246	5566-24BPS-210	39-31-0244	5566-24BPB-210	24		
▲ -0226	-22BPS-210	▲ -0224	-22BPB-210	22		
-0206	-20BPS-210	-0204	-20BPB-210	20		
-0186	-18BPS-210	-0184	-18BPB-210	18		
-0166	-16BPS-210	-0164	-16BPB-210	16		
-0146	-14BPS-210	-0144	-14BPB-210	14		
-0126	-12BPS-210	-0124	-12BPB-210	12		
-0106	-10BPS-210	-0104	-10BPB-210	10		
-0086	-08BPS-210	-0084	-08BPB-210	8		
-0066	-06BPS-210	-0064	-06BPB-210	6		
▼ -0046	-04BPS-210	▼ -0044	-04BPB-210	4		
39-31-0026	5566-02BPS-210	39-31-0024	5566-02BPB-210	2		
EDP NO.		ENG. NO	EDP NO.		ENG. NO	CKT. SIZE
5566-NBPS-210			5566-NBPB-210			
39-31-0245	5566-24BPS	39-31-0243	5566-24BPB	24		
▲ -0225	-22BPS	▲ -0223	-22BPB	22		
-0205	-20BPS	-0203	-20BPB	20		
-0185	-18BPS	-0183	-18BPB	18		
-0165	-16BPS	-0163	-16BPB	16		
-0145	-14BPS	-0143	-14BPB	14		
-0125	-12BPS	-0123	-12BPB	12		
-0105	-10BPS	-0103	-10BPB	10		
-0085	-08BPS	-0083	-08BPB	8		
-0065	-06BPS	-0063	-06BPB	6		
▼ -0045	-04BPS	▼ -0043	-04BPB	4		
39-31-0025	5566-02BPS	39-31-0023	5566-02BPB	2		
EDP NO.		ENG. NO	EDP NO.		ENG. NO	CKT. SIZE
5566-NA-400			5566-NBPS			
EDP NO.		ENG. NO	EDP NO.		ENG. NO	CKT. SIZE

5566-N****-		24		SEE NOTE 2		REVISE ONLY ON CAD SYSTEM	
MODEL NO.		FINISH		TITLE 名称		NEW MINI FIT CONNECTOR HEADER HOUSING ASS'Y	
角 度 ANGLE		適用電線範囲		INS. RANGE		-LEAD FREE-	
30 00.1		90/6/8		—H—		DWG. NO.	
10 00.25		90/8/5		CHK'D BY 94/4/20		SHEET 4 OF 4	
10 00.2		94/4/3		M.FUKUSHIMA		REV	
GENERAL TOLERANCES		REVISION RECORD		SCALE —H—		J	
記号		変更内容		DRAWN BY 94/4/3		SD-5566-N****-	
LTR		CHK.		DATE			

MOLEX-JAPAN CO.,LTD.

日本モリツクス株式会社



"BLANK" : ティ□ゝ66, UL 94V-2
210 : ティ□ゝ66, UL 94V-0
400 : ティ□ゝ66, UL 94V-0, 黒

MODEL NO.
5566-NA**-*

8

7

6

5

4

3

2

1

39-35-0248	5566-24A-400	24
▲-0228	▲-22A-400	22
-0208	-20A-400	20
-0188	-18A-400	18
-0168	-16A-400	16
-0148	-14A-400	14
-0128	-12A-400	12
-0108	-10A-400	10
-0088	-08A-400	8
-0068	-06A-400	6
▼-0048	▼-04A-400	4
39-35-0028	5566-02A-400	2
EDP NO.	ENG. NO	極数
5566-NA-400		

39-29-5247	5566-24APB-210	39-29-6248	5566-24AGS-210	39-28-8240	5566-24A-210	24
▲-5227	▲-22APB-210	▲-6228	▲-22AGS-210	▲-8220	▲-22A-210	22
-5207	-20APB-210	-6208	-20AGS-210	-8200	-20A-210	20
-5187	-18APB-210	-6188	-18AGS-210	-8180	-18A-210	18
-5167	-16APB-210	-6168	-16AGS-210	-8160	-16A-210	16
-5147	-14APB-210	-6148	-14AGS-210	-8140	-14A-210	14
-5127	-12APB-210	-6128	-12AGS-210	-8120	-12A-210	12
-5107	-10APB-210	-6108	-10AGS-210	-8100	-10A-210	10
-5087	-08APB-210	-6088	-08AGS-210	-8080	-08A-210	8
-5067	-06APB-210	-6068	-06AGS-210	-8060	-06A-210	6
▼-5047	▼-04APB-210	▼-6048	▼-04AGS-210	▼-8040	▼-04A-210	4
39-29-5027	5566-02APB-210	39-29-6028	5566-02AGS-210	39-28-8020	5566-02A-210	2
EDP NO.	ENG. NO	EDP NO.	ENG. NO	EDP NO.	ENG. NO	極数
5566-NAPB-210						

39-29-5246	5566-24APB	39-29-0243	5566-24AGS	39-28-1243	5566-24A	24
▲-5226	▲-22APB	▲-0223	▲-22AGS	▲-1223	▲-22A	22
-5206	-20APB	-0203	-20AGS	-1203	-20A	20
-5186	-18APB	-0183	-18AGS	-1183	-18A	18
-5166	-16APB	-0163	-16AGS	-1163	-16A	16
-5146	-14APB	-0143	-14AGS	-1143	-14A	14
-5126	-12APB	-0123	-12AGS	-1123	-12A	12
-5106	-10APB	-0103	-10AGS	-1103	-10A	10
-5086	-08APB	-0083	-08AGS	-1083	-08A	8
-5066	-06APB	-0063	-06AGS	-1063	-06A	6
▼-5046	▼-04APB	▼-0043	▼-04AGS	▼-1043	▼-04A	4
39-29-5026	5566-02APB	39-29-0023	5566-02AGS	39-28-1023	5566-02A	2
EDP NO.	ENG. NO	EDP NO.	ENG. NO	EDP NO.	ENG. NO	極数
5566-NAPB						

5566-NA***		5566-NAGS		5566-NA	
MODEL NO.		FINISH		EDP NO.	
角 度 ANGLE		仕 上 げ 注 記 2 参 照		表 参 照	
30°以上	0.3	F	SEE SHEET 1 OF 2	適用電線範囲	—H—
30°以下	0.25	E	SEE SHEET 1 OF 2	被覆外径	—H—
未 注	0.2	D	SEE SHEET 1 OF 2	INS. RANGE	—H—
10 UNDER	0.2	記号	変更内容	DR. CHK. DATE	尺 度
10 UNDER	0.2	REVISION RECORD	REVISION RECORD	APPD BY	SCALE
一般公差	0.2	REVISION RECORD	REVISION RECORD	MEMOROTO	—H—
GENERAL TOLERANCES	0.2	REVISION RECORD	REVISION RECORD	MEMOROTO	—H—