
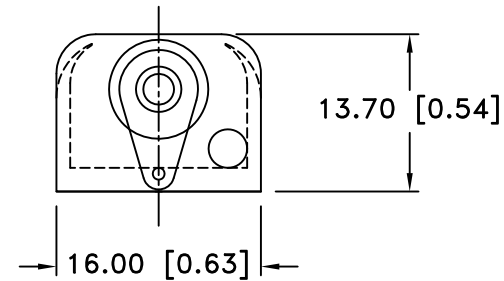
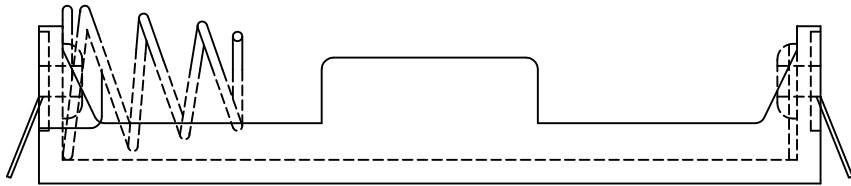



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/02/09	E	REDRAWN. DIM. 59.70 WAS 56.30 DIM. 13.70 WAS 13.00 DIM. 16.00 WAS 16.40	T.B.	B.S.	
10/10/14	F	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

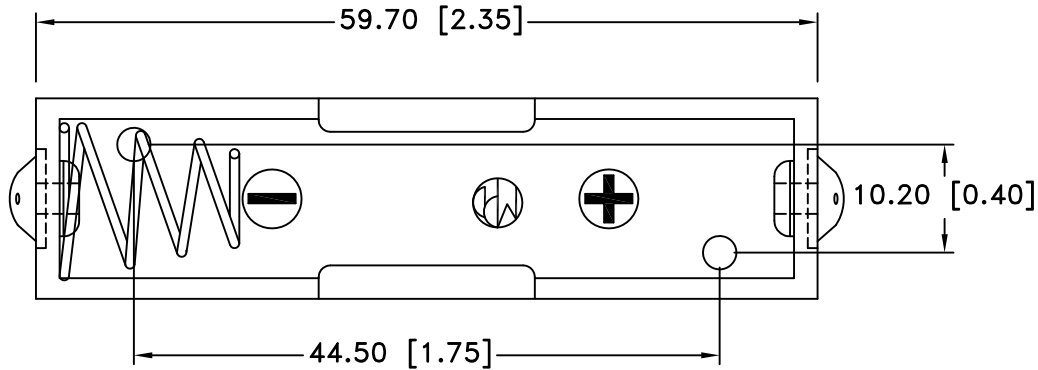

#### NOTES:

Plastic material - Polypropylene, Black  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 Lugs - Brass, Nickel Plated  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Title ONE "AA" CELL HOLDER WITH SOLDER LUGS		Scale Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)			
Angular ± 3°	Date 10/10/14	Drawing Number BCAAL	