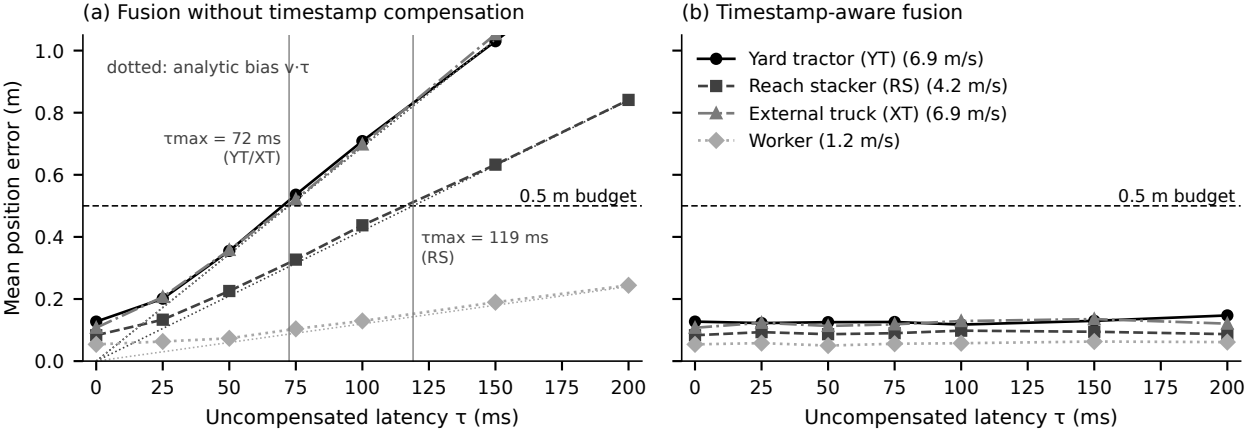
(a) Fusion without timestamp compensation
(b) Timestamp-aware fusion
Mean position error (m)
Uncompensated latency τ (ms)
dotted: analytic bias v·τ
τmax = 72 ms
(YT/XT)
τmax = 119 ms
(RS)
0.5 m budget
Yard tractor (YT) (6.9 m/s)
Reach stacker (RS) (4.2 m/s)
External truck (XT) (6.9 m/s)
Worker (1.2 m/s)