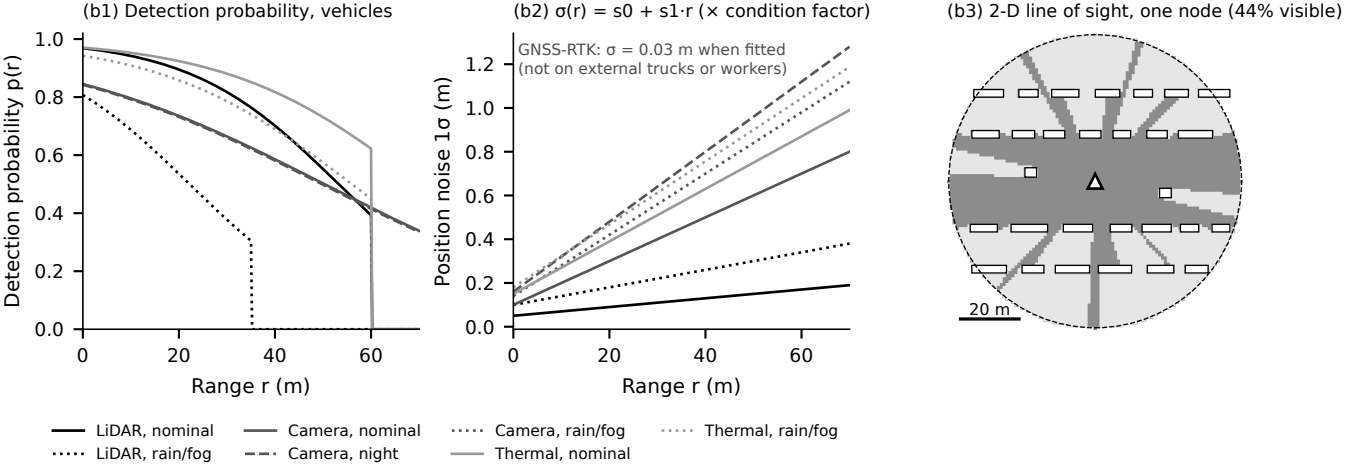
(b1) Detection probability, vehicles
Detection probability p(r)
1.0
0.8
0.6
0.4
0.2
0.0
0
20
40
60
Range r (m)
(b2) σ(r) = s0 + s1·r (× condition factor)
GNSS-RTK: σ = 0.03 m when fitted
(not on external trucks or workers)
Position noise 1σ (m)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
0
20
40
60
Range r (m)
(b3) 2-D line of sight, one node (44% visible)
20 m
LiDAR, nominal
LiDAR, rain/fog
Camera, nominal
Camera, night
Camera, rain/fog
Thermal, nominal
Thermal, rain/fog