


Frame response time, N = 1024, A: control-channel receiver first in graph order, at 0 sat.

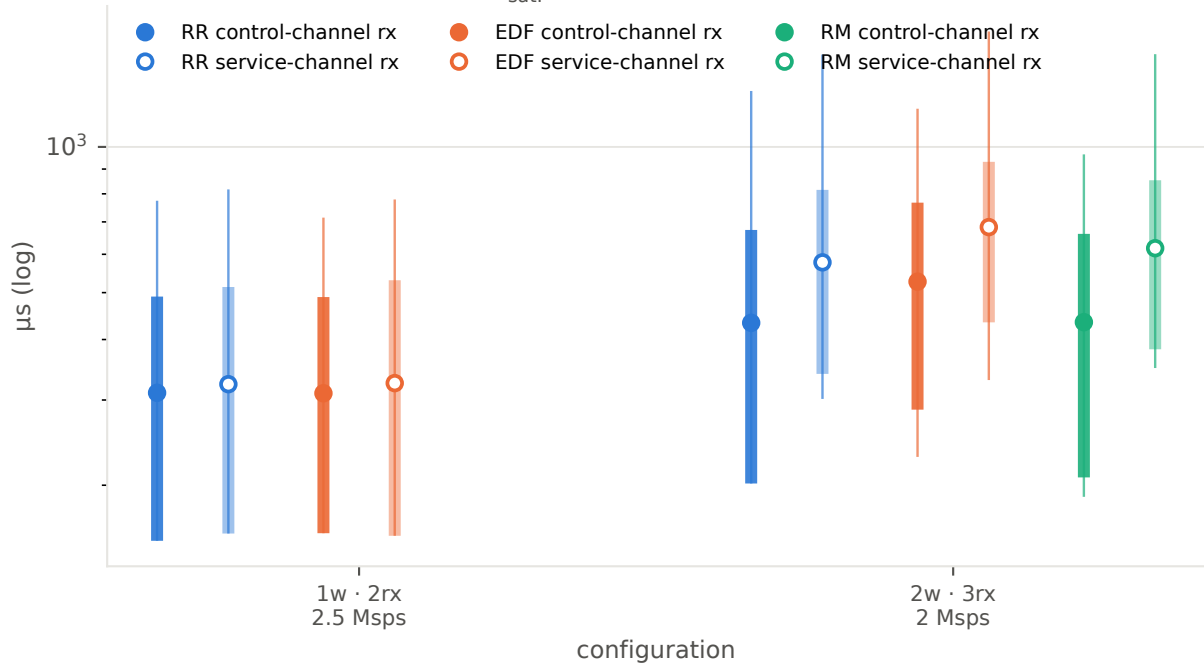

filled = the control-channel receiver (the tight class; receiver 0 unless the setting says LAST), hollow = the service-channel receiver