


Batch response time, $N = 1024$, A: control-channel receiver LAST, at 0.5_{sat.}

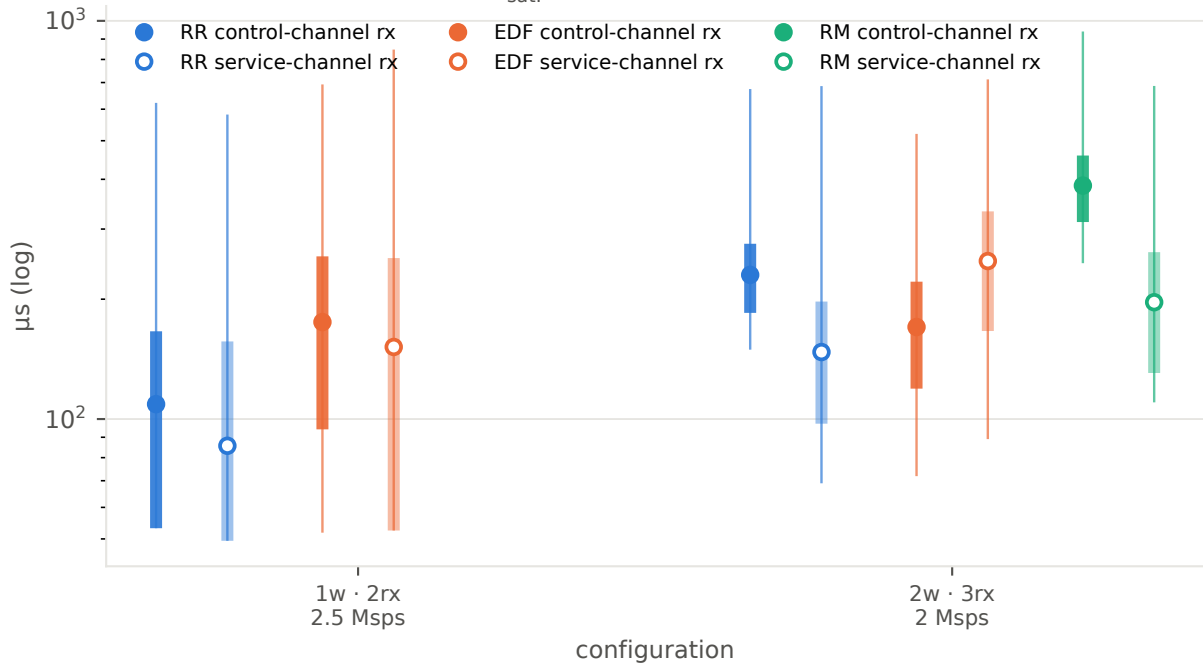

filled = the control-channel receiver (the tight class; receiver 0 unless the setting says LAST), hollow = the service-channel receiver