

Outdoor lighting levels



Indoor lighting levels



Watches



Amorphous Silicon Solar Cells

Solar cells are classified by their material: crystal silicon, amorphous silicon, or compound semiconductor solar cells. Amorphous refers to objects without a definite shape and is defined as a non-crystal material. Unlike crystal silicon (Fig. 2) in which atomic arrangements are regular, amorphous silicon features irregular atomic arrangements (Fig. 1).

As a result, the reciprocal action between photons and silicon atoms occurs more frequently in amorphous silicon than in crystal silicon, allowing more light to be absorbed. Thus, an ultrathin amorphous silicon film less than 1 μm (1/1000 of 1 mm) can be produced and used for power generation. Our company developed Amorton, the world's first integrated (series-connectable) amorphous silicon solar cell, using decomposed material gases to form a film on top of a series of substrates. For example, during the manufacturing process that utilizes glass as a substrate, once the transparent electrode is formed, a film of amorphous silicon is layered onto it. The metal film electrode is then formed and finally the solar cell is covered with a protective film. Since our patterning technology allows for multiple solar cells connected in series to be created on a single substrate, solar cells of any chosen voltage can be designed to suit any application.

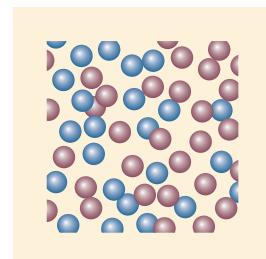


Fig.1 Amorphous silicon

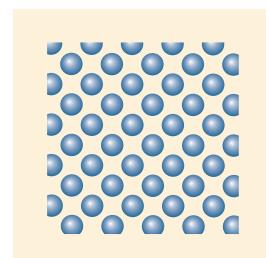


Fig.2 Crystal silicon

What is "Amorton"?

"Amorton" is the product name of Panasonic's Amorphous Silicon Solar Cells, which was named by integrating amorphous silicon and photons (particles of light).

History

1975 : Research begins on amorphous silicon solar cells


1978 : Integrated (series connection structure) amorphous silicon solar cells are developed

1980 : "Amorton", world's first amorphous silicon solar cells for commercial use, became a product

2010 : The production of one billion amorton

Principles of Power Generation

Power is generated in solar cells due to the photovoltaic effect of semiconductors.

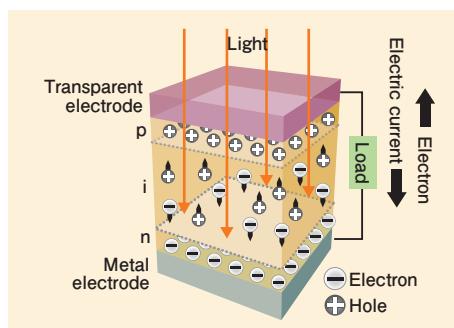

- When a semiconductor is exposed to a light source of suitable intensity, a large number of electrons (−) and holes (+) are generated and form electricity.
- At a p/n junction between two different semiconductor materials, the electrons are collected in the n-type material and the holes are collected in the p-type material by internal electric field.
- When an external load is connected, electricity flows through the load. Then generated electricity can be used.

Features

Copes easily with device's required drive voltage

Since multiple cells can be simultaneously connected in a series when the solar cells are formed, unlike the fabrication technique used with crystalline silicon solar cells in which multiple solar cells are severed and connected, it is easy to create cells with a variety of voltages.


Variety of shapes and forms

The methods used in amorphous silicon films have special features that allow other substrates, such as stainless steel or plastic films, to be used instead of customary glass substrates. This means that previously unknown solar cells can also be created, including solar cells that are round, square, or any other complex shape or solar cells that can even be bent. It is also possible to create areas in these solar cells that just consist of transparent glass by etching.

High sensitivity within visible light spectrum


The human eye is sensitive to light from a range of about 400 to 700 nm wavelengths. Since amorphous silicon solar cells are sensitive to light with essentially the same wavelengths, they can also be used as visible light sensors.

Crystalline silicon solar cells

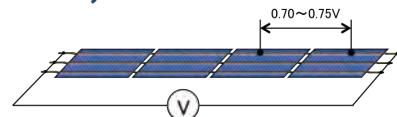


Integrated amorphous silicon solar cells

[Cell connection structure]
[Type I connection]

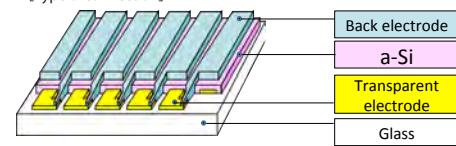

[Type II connection]

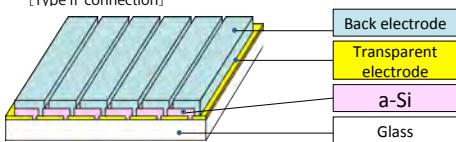

Location of use	Substrate	Features	References
Indoors	Glass	Representative substrate for such purposes as calculators	Page 7
	Stainless steel	Thin, lightweight, unbreakable, and easily formed into arbitrary shapes of highly precise dimensions	Contact us.
	Film	Thin, lightweight, unbreakable and easily formed into arbitrary shapes ※	Contact us.
Outdoors	Glass	Representative substrate For recharging secondary batteries outdoors, etc.	Page 7
	Film	Thin, lightweight, unbreakable, and easily formed into arbitrary shapes ※	Page 8
Visible light sensor	Glass	Supports designs for arbitrary sizes and patterns as required for applications	Page 8

※ Material's flexibility is limited.

Amorton applications : examples of use

- Wristwatches / Clocks / Wall clocks ● Calculators
- Energy-harvesting equipment
- Wireless sensor networks / RFID tags / RF remote controls for digital home appliances, etc.
- Power sources for multiple cards attached to displays
- Power sources of wearable terminals ● Toys ● e-books
- Garden lights, sensor lights, LED blinkers (curbstone markers, etc.)
- Car accessories and battery chargers
- Security devices ● Power sources for other electric equipment and digital displays
- Reduction of battery replacements and extension of battery life for appliances using dry cells and coin batteries ● IoT
- The power supply for human body sensors, the power supply for temperature & humidity sensors

*Please contact us about replacing selenium cells.

Categories of Light Sources

Amorton is available for use under a variety of light sources.

Artificial light	Natural light
<ul style="list-style-type: none"> ● Incandescent light ● Fluorescent light ● Electric discharge lamps ● Light-emitting diodes(LED) 	Sunlight


Concerning sunlight

Since the nature of sunlight varies by season and climate, the conditions for measuring the output of solar cells have been unified as a world standard.

<STC : Standard Test Conditions>

- Solar irradiance: 1000W/m^2 ($=100\text{mW/cm}^2$)
- Spectrum: AM-1.5
- Cell temperature: 25°C (degrees Celsius)

AM (Air mass) is used for the sunlight spectrum. AM indicates the distance traveled by the sunlight through space: AM-0 in outer space, AM-1 when the sun is at the equator, and AM-1.5 in the latitudinal area of Japan.

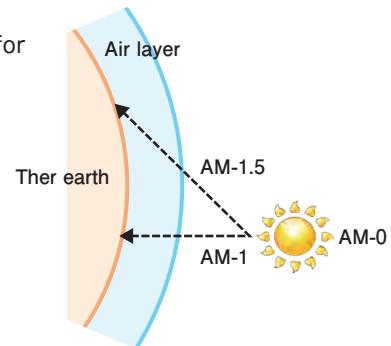


Illumination Levels as References

- Brightness around Amorton is critical because it is used both indoors and outdoors.
- Unit of luminous intensity is lux (lx).


Fluorescent light		Sunlight	
Conditions	Illumination levels (lx)	Conditions	Illumination levels (lx)
Design stands (partially illuminated)	~ 1,000	Sunny, Noon	100,000
Offices and conference rooms	300 ~ 600	Sunny, 10:00 a.m.	65,000
Restaurants, coffee shops, dressing/changing rooms	75 ~ 150	Sunny, 3:00 p.m.	35,000
Indoor emergency staircases	less than 75	Cloudy, Noon	32,000

Radiant Spectrum of Light Source and Spectral Sensitivity of Solar Cells

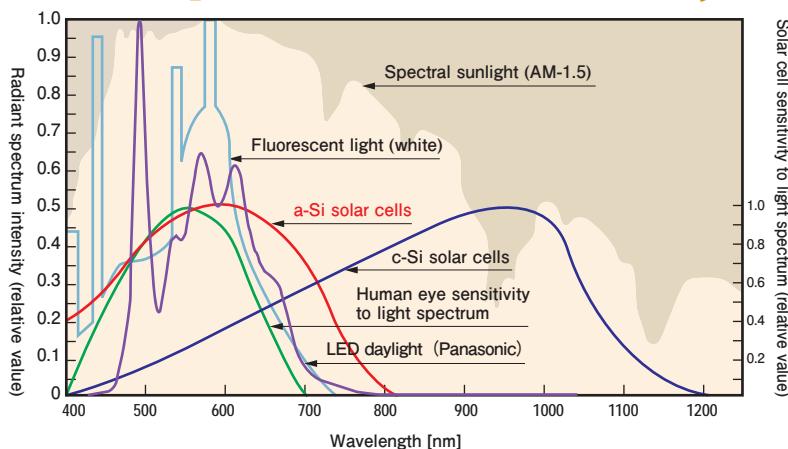

Light wavelength differs depending on the light sources to which they are exposed. Spectral sensitivity of solar cells also differs depending on the category. Amorphous silicon solar cells provide light-sensing capability similar to the human eye.

Amorton Configuration

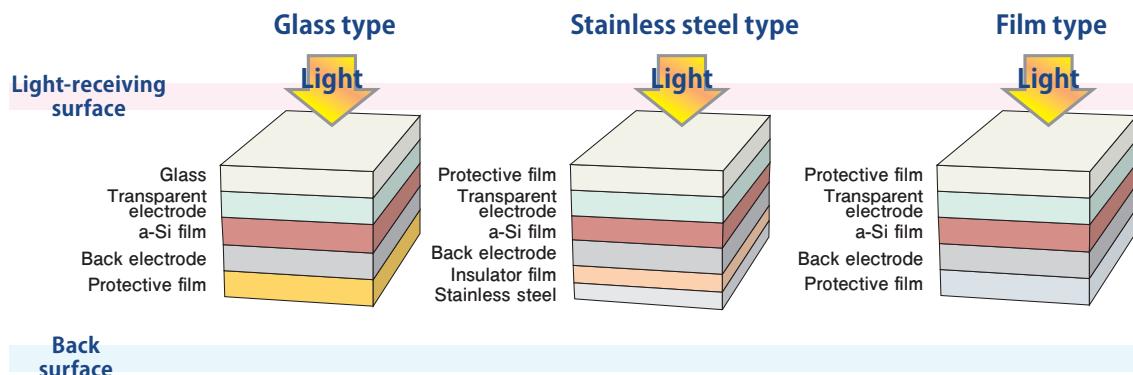

View of Electrical Properties of Amorton

The figure to the right shows Amorton's electrical Properties by current-voltage curves, which change depending on the incident light intensity and on the surrounding temperature of the solar cells.

Voc : Open-circuit voltage

Isc : Short-circuit current

Vpm : Optimum power operating voltage

Ipm : Optimum power operating current


Pm : Maximum power = $V_{pm} \times I_{pm}$

Vope : Operating voltage (specified voltage)

Iope : Operating current


*Current drastically changes under Vpm or higher.

For keeping the stable current under the anticipated illumination level, set the Vope as high as or lower than the Vpm.

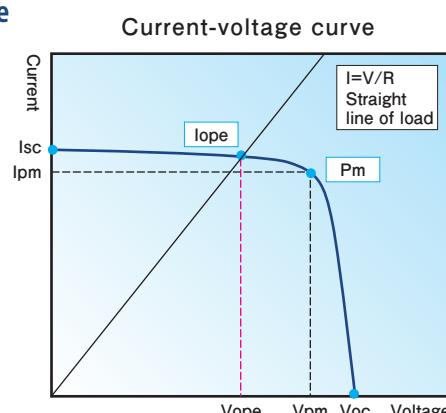

Relationship Between Number of Rows on Solar Cell /Cell Area and Electrical Properties

The current generated by solar cells is proportional to their area. Therefore, when the cell area is doubled under a specified illumination level, the current is also doubled. When the number of cells is doubled, the voltage is doubled due to the circuit series. The electrical properties specific to relevant use are available by adjusting the number of solar cells and the cell area.

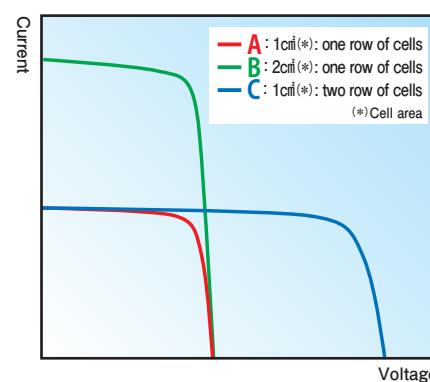

Amorton Electrical Properties

■ Electrical Properties of Amorton for Indoor Use


Substrate	Open-circuit voltage	Short-circuit current	Maximum power	Light source
Glass	0.63V/cell	17.0 μ A/cm ²	7.3 μ W/cm ²	FL-200lx(25°C)
Film	0.7V/cell	19.6 μ A/cm ²	9.0 μ W/cm ²	FL-200lx(25°C)

FL=fluorescent light

The illumination level of light sources used outdoors, such as fluorescent or incandescent light, ranges from 50 to 1,000 lux. Indoors, Amorton is most suitable for such small equipment as electronic calculators.

(Since Amorton is designed for outdoor use, please it under 1,000 lux.)

Current-Voltage Characteristics of a Cell

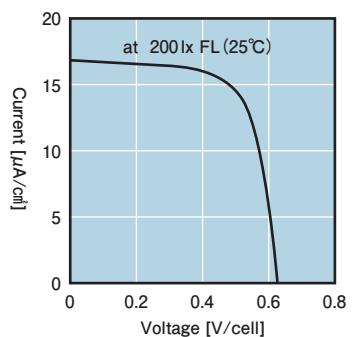


■ Electrical Properties of Amorton for Outdoor Use (glass type)

Open-circuit voltage	Short-circuit current	Maximum power	Light source
0.89V/cell	14.8mA/cm ²	7.89mW/cm ²	AM-1.5, 100mW/cm ² (25°C)

Generally, the illuminance of natural light ranges from 10,000 to 100,000 lux. Amorton's outdoor illuminance specifications make it suitable for small devices intended for use outdoors, such as outdoor lighting fixtures.


Current-Voltage Characteristics of a Cell

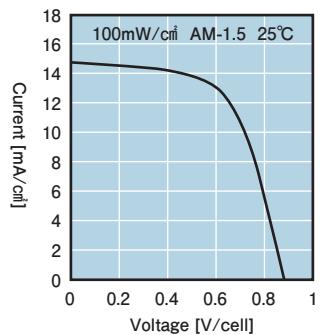


■ Electrical Properties of Amorton for Outdoor Use (film type)

Open-circuit voltage	Short-circuit current	Maximum power	Light source
0.82V/cell	12.0mA/cm ²	5.6mW/cm ²	AM-1.5, 100mW/cm ² (25°C)


Current-Voltage Characteristics of a Cell

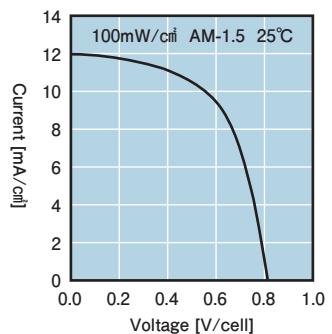

Relationship between Output and Illuminance

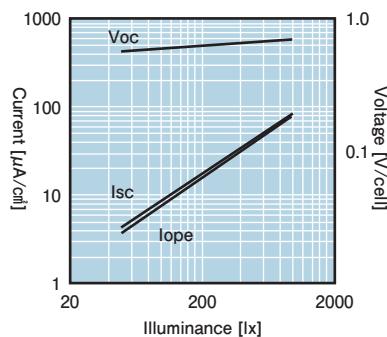


Relationship between Output and Temperature

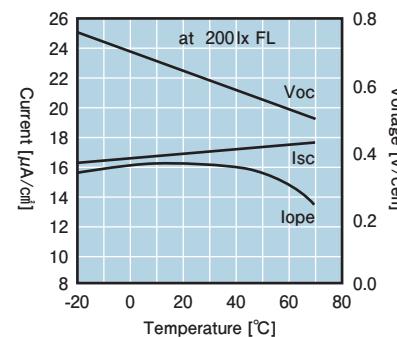


Temperature coefficient	
Voc	-0.45% / °C
Isc	0.08% / °C


Relationship between Output and Illuminance

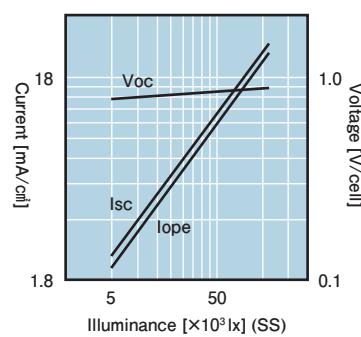

Relationship between Output and Temperature

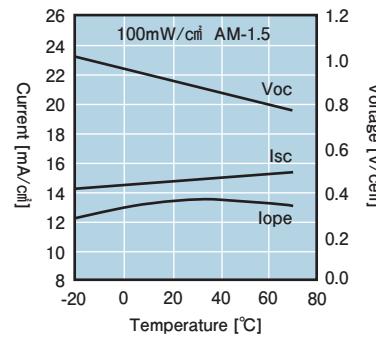


Lightproof [Outdoors]

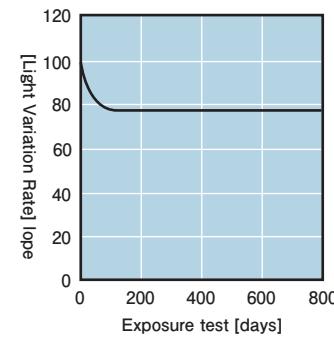


Temperature coefficient	
Voc	-0.3% / °C
Isc	0.08% / °C

(※) SS:solar simulator


Relationship between Output and Illuminance

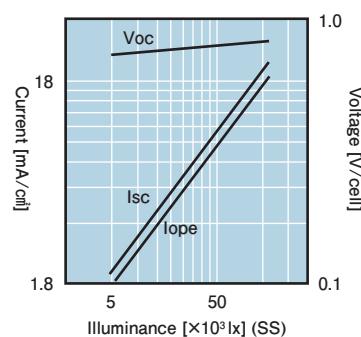

Relationship between Output and Temperature

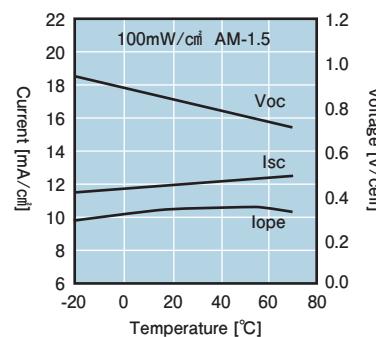

Lightproof [Outdoors]

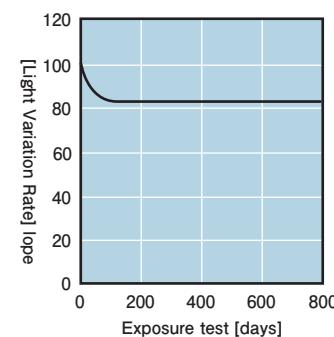

Temperature coefficient	
Voc	-0.3% / °C
Isc	0.08% / °C

(※) SS:solar simulator


Amorton Product List (made with a glass substrate)

■ Indoor products

Customization available

The following are the standard products included in our lineup.

Designs may be customized based on requests. For inquiries, please refer to the back cover.

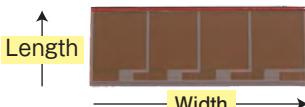

Products name	Fluorescent light : 200lx (25°C)			External dimensions (mm) Width x length x thickness	Weight (g)
	Voc	Isc	Vope-lope		
AM-1312	1.9V	17.6μA	1.2V-16.2μA	38.0×12.5×1.1	1.3
AM-1456	2.5V	6.4μA	1.5V-5.9μA	25.0×10.0×1.1	0.7
AM-1411	2.5V	9.5μA	1.5V-8.6μA	29.6×11.8×1.1	1.0
AM-1437	2.5V	9.2μA	1.5V-8.5μA	29.6×11.8×1.1	1.0
AM-1407	2.5V	13.1μA	1.5V-12.2μA	38.0×12.5×1.1	1.3
AM-1417	2.5V	14.1μA	1.5V-13.3μA	35.0×13.9×1.1	1.3
AM-1424	2.5V	22.0μA	1.5V-20.6μA	53.0×13.8×1.1	2.0
AM-1454	2.5V	35.2μA	1.5V-33.3μA	41.6×26.3×1.1	3.0
AM-1513	3.1V	16.8μA	1.8V-15.9μA	55.0×13.5×1.1	2.0
AM-1522	3.1V	62.2μA	2.1V-58.7μA	55.0×40.5×1.1	6.3
AM-1606	3.7V	3.6μA	2.6V-3.4μA	15.0×15.0×0.7	0.4
AM-1713	4.4V	16.7μA	3.0V-15.2μA	96.6×10.0×1.1	2.7
AM-1719	4.4V	18.6μA	3.0V-17.3μA	41.6×26.3×1.1	3.1
AM-1819	5.0V	8.1μA	3.0V-6.9μA	31.0×24.0×1.1	2.2
AM-1820	5.0V	14.8μA	3.0V-13.8μA	43.0×26.0×1.1	3.1
AM-1805	5.0V	16.8μA	3.0V-15.7μA	55.0×20.0×1.1	3.0
AM-1801	5.0V	20.2μA	3.0V-18.9μA	53.0×25.0×1.1	3.6
AM-1815	5.0V	48.2μA	3.0V-45.7μA	58.1×48.6×1.1	7.8
AM-1816	5.0V	96.7μA	3.0V-92.2μA	96.7×56.7×1.1	15.6


※The above patterns are representative operating patterns (initial/default values).

■ Outdoor products

Customization available

The following are the standard products included in our lineup.

Designs may be customized based on requests. For inquiries, please refer to the back cover.

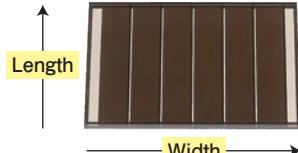

Products name	100mW/cnl AM-1.5 (25°C)		SS-50klx (25°C)		External dimensions (mm) Width x length x thickness	Weight (g)
	Vope-lope	Pm (Vpm-lpm)	Vope-lope	Pm (Vpm-lpm)		
AM-5308	1.7V-88.8mA	117mW (1.9V-61.5mA)	1.7V-31.1mA	58mW (1.9V-29.2mA)	50.1×47.2×1.1	6.4
AM-5302	1.7V-105.0mA	181mW (1.9V-95.5mA)	1.7V-47.0mA	86mW (1.9V-45.1mA)	31.2×117.8×1.8	16.3
AM-5413	2.2V-16.7mA	39mW (2.6V-15.0mA)	2.2V-7.5mA	18mW (2.6V-7.1mA)	33.0×23.9×1.1	2.1
AM-5412	2.2V-39.8mA	93mW (2.6V-35.8mA)	2.2V-17.9mA	44mW (2.6V-16.9mA)	50.1×33.1×1.8	7.3
AM-5610	3.3V-5.1mA	18mW (3.9V-4.6mA)	3.3V-2.3mA	8mW (3.9V-2.2mA)	25.0×20.0×1.8	2.2
AM-5613	3.3V-31.6mA	110mW (3.9V-28.2mA)	3.3V-14.5mA	52mW (3.9V-13.3mA)	60.1×36.7×1.8	9.8
AM-5608	3.3V-36.0mA	125mW (3.9V-32.0mA)	3.3V-16.5mA	59mW (3.9V-15.1mA)	60.1×41.3×1.8	11.0
AM-5605	3.3V-115.4mA	401mW (3.9V-102.7mA)	3.3V-52.9mA	189mW (3.9V-48.6mA)	62.3×117.8×1.8	32.5
AM-8706	3.9V-19.9mA	81mW (4.6V-17.7mA)	3.9V-9.0mA	39mW (4.6V-8.3mA)	36.1×41.3×1.1	4.1
AM-8704	3.9V-23.8mA	97mW (4.6V-21.0mA)	3.9V-10.7mA	46mW (4.6V-9.9mA)	41.2×41.3×1.1	4.6
AM-8703	3.9V-32.1mA	131mW (4.6V-28.5mA)	3.9V-14.5mA	62mW (4.6V-13.4mA)	41.2×55.1×1.1	6.2
AM-5710	3.9V-32.6mA	134mW (4.6V-29.0mA)	3.9V-14.7mA	63mW (4.6V-13.7mA)	62.3×37.0×1.1	6.3
AM-8702	3.9V-34.4mA	140mW (4.6V-30.5mA)	3.9V-15.5mA	67mW (4.6V-14.4mA)	57.7×41.3×1.1	6.5
AM-5706	3.9V-45.9mA	186mW (4.6V-40.5mA)	3.9V-21.0mA	88mW (4.6V-19.1mA)	70.0×50.0×1.8	15.5
AM-8701	3.9V-46.6mA	190mW (4.6V-41.2mA)	3.9V-21.0mA	90mW (4.6V-19.4mA)	57.7×55.1×1.1	8.6
AM-5815	4.5V-2.5mA	12mW (5.2V-2.3mA)	4.5V-1.1mA	6mW (5.2V-1.1mA)	31.2×10.8×1.1	0.9
AM-5816	4.5V-6.5mA	32mW (5.2V-6.2mA)	4.5V-3.0mA	15mW (5.2V-2.9mA)	32.1×23.6×1.1	2.2
AM-5812	4.5V-19.8mA	93mW (5.2V-17.8mA)	4.5V-8.9mA	44mW (5.2V-8.4mA)	59.0×28.7×1.1	4.6
AM-5813	4.5V-25.0mA	117mW (5.2V-22.6mA)	4.5V-11.3mA	55mW (5.2V-10.7mA)	41.2×60.2×1.1	6.7
AM-8804	4.5V-33.3mA	156mW (5.2V-30.0mA)	4.5V-15.1mA	74mW (5.2V-14.2mA)	48.1×55.1×1.1	7.2
AM-5814	4.5V-38.6mA	180mW (5.2V-34.7mA)	4.5V-17.4mA	85mW (5.2V-16.4mA)	55.1×60.1×1.1	9.0
AM-8801	4.5V-41.9mA	196mW (5.2V-37.7mA)	4.5V-18.9mA	93mW (5.2V-17.8mA)	57.7×55.1×1.1	8.6
AM-5904	5.0V-9.9mA	52mW (5.9V-8.7mA)	5.0V-4.5mA	24mW (5.9V-4.1mA)	40.1×33.1×1.8	5.9
AM-5912	5.0V-15.3mA	80mW (5.9V-13.6mA)	5.0V-7.0mA	38mW (5.9V-6.4mA)	42.9×47.2×1.1	5.6
AM-5909	5.0V-22.2mA	116mW (5.9V-19.6mA)	5.0V-10.1mA	55mW (5.9V-9.3mA)	60.1×41.3×1.8	11.0
AM-5914	5.0V-23.1mA	121mW (5.9V-20.4mA)	5.0V-10.6mA	57mW (5.9V-9.7mA)	50.1×55.1×1.1	7.5
AM-5913	5.0V-30.1mA	157mW (5.9V-26.6mA)	5.0V-13.8mA	74mW (5.9V-12.6mA)	60.1×55.1×1.8	14.7
AM-5907	5.0V-45.7mA	241mW (5.9V-40.8mA)	5.0V-20.6mA	114mW (5.9V-19.3mA)	75.0×55.0×1.8	18.3
AM-5902	5.0V-60.8mA	317mW (5.9V-53.7mA)	5.0V-27.8mA	150mW (5.9V-25.4mA)	150.0×37.5×1.8	25.0
AM-7A03	5.5V-227.0mA	1336mW (6.6V-202.3mA)	5.5V-113.0mA	702mW (6.6V-106.3mA)	150.0×165.0×1.8	110.0
AM-7D08	7.2V-172.0mA	1303mW (8.5V-153.2mA)	7.2V-85.0mA	684mW (8.5V-80.5mA)	150.0×165.0×1.8	110.0
AM-5E02	7.7V-23.2mA	189mW (9.2V-20.5mA)	7.7V-10.6mA	89mW (9.2V-9.7mA)	75.0×55.0×1.8	18.3
AM-7E04	7.7V-104.0mA	852mW (9.2V-92.6mA)	7.7V-50.0mA	447mW (9.2V-48.6mA)	150.0×110.0×1.8	74.0
AM-5S06	15.4V-11.4mA	188mW (18.4V-10.2mA)	15.4V-5.1mA	89mW (18.4V-4.8mA)	124.5×29.5×1.1	10.0
AM-7S03	15.4V-70.0mA	1133mW (18.4V-61.6mA)	15.4V-34.5mA	595mW (18.4V-32.4mA)	150.0×165.0×1.8	110.0

Note : The above table shows standard weights, excluding lead.


※The above patterns are representative operating patterns (initial/default values). ※SS : solar simulator

Amorton Product List (made with a film substrate)

■Outdoor products

Customization available

The following are the standard products included in our lineup.
Designs may be customized based on requests. For inquiries, please refer to the back cover.

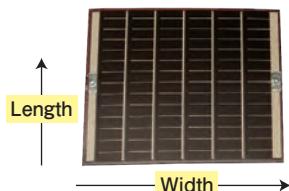

Products name	100mW/cm² AM-1.5 (25°C)		SS-50klx (25°C)		External dimensions (mm) Width x length x thickness	Weight (g)
	Vope-lope	Pm (Vpm-Ipm)	Vope-lope	Pm (Vpm-Ipm)		
AT-7665	3.0V-38.6mA	125mW (3.6V-34.7mA)	3.0V-17.3mA	58mW (3.6V-16.2mA)	58.4×56.0×0.3	2.0
AT-7664	3.0V-104.0mA	335mW (3.6V-93.0mA)	3.0V-46.5mA	156mW (3.6V-43.3mA)	73.0×112.0×0.3	4.0
AT-7666	3.0V-343.0mA	1109mW (3.6V-308.2mA)	3.0V-154.0mA	517mW (3.6V-143.6mA)	146.0×167.5×0.3	13.0
AT-7705	3.5V-33.3mA	128mW (4.2V-30.5mA)	3.5V-16.2mA	62mW (4.2V-14.7mA)	73.0×42.0×0.3	4.0
AT-7802	4.0V-29.7mA	127mW (4.8V-26.4mA)	4.0V-14.3mA	62mW (4.8V-12.9mA)	73.0×42.0×0.3	4.0
AT-7963	4.5V-223.0mA	1083mW (5.4V-200.6mA)	4.5V-100.0mA	505mW (5.4V-93.5mA)	146.0×167.5×0.3	13.0
AT-7S63	15.0V-134.0mA	2104mW (16.8V-125.2mA)	15.0V-60.5mA	980mW (16.8V-58.3mA)	292.0×168.0×0.3	25.0
AT-7S64	15.0V-269.0mA	4208mW (16.8V-250.4mA)	15.0V-121.0mA	1960mW (16.8V-116.7mA)	292.0×336.0×0.3	50.0

Note : The above table shows standard weights, excluding lead.

※The above patterns are representative operating patterns (initial/default values). ※SS : solar simulator

Amorton Product List (watches)

Customization available

The following are the standard products included in our lineup.
Designs may be customized based on requests. For inquiries, please refer to the back cover.

Products name	Substrate	Vope-lope	External dimensions (mm) Width x length x thickness	Weight (g)
		Fluorescent light : 200lx (25°C)		
AL-2402	Stainless steel	1.5V-10.1μA	φ27.2×0.2	0.7
AT-2400B	Film	1.5V-18.5μA	26.3×26.8×0.18	0.1
AT-26L0B	Film	2.6V-14.6μA	26.3×26.8×0.18	0.1
AM-2709B	Glass	3.0V-3.3μA	φ30.8×0.7	1.3

※The above patterns are representative operating patterns (initial/default values).



AL-2402



AT-2400B



AT-26L0B



AM-2709B

Amorton Product List (photosensors)

The following are the standard products included in our lineup.

Designs may be customized based on requests. For inquiries, please refer to the back cover.

Products name	Substrate	Voc	Isc	External dimensions (mm) Width x Length x Thickness	Weight(g)
AM-30-11	Glass	0.6V	17.7μA	14.0×13.0×1.1	0.6

Fluorescent light : 200lx(25°C)

How to look at the Products name

AM-1407C-OO

Kind of the substrate

AM : Glass type
AL : Stainless steel type
AT : Film type

1 : Indoor products
2 : Watches
5, 7, 8 : Outdoor products
30 : Photosensors

**Number of cells
(Series connection)**

1 : 1 cell
2 : 2 cell
3 : 3 cell
A : 10 cell
B : 11 cell

Development Number

01
02
.
.
99
A0
A1
.



Customer number



We give the customer number
at the time of a mass production

Terminal structures

A,CA,CAR : With lead wire
B,C,CS : Without lead wire

Effects on Output in Shaded Areas

Indoors			
B type	C type	CS type	CA type
 <p>Conductive paste Solar</p> <p>Cannot be soldered. A heat seal may be used.</p>	 <p>Conductive paste Lead wire can be attached using a regular solder.</p>	 <p>Temporary solder</p> <p>A temporary solder is attached to a C type device.</p>	 <p>Lead wire A C type terminal with a lead wire</p>
<ul style="list-style-type: none"> Mainly for watches 	<ul style="list-style-type: none"> Primarily for indoor products Outdoor products Photosensors 	<ul style="list-style-type: none"> Mainly photosensors 	<ul style="list-style-type: none"> Mainly for indoor products Photosensors

outdoors	
C type	CAR type, A type
 <p>Conductive paste Lead wire can be attached using a regular solder.</p>	 <p>Resin coating Pins are protected with a resin coating after lead is attached.</p>
<ul style="list-style-type: none"> Primarily for indoor products Outdoor products Photosensors 	<ul style="list-style-type: none"> Primarily for indoor products *CAR type (glass) *A type (film)


*How connectors are attached can be adjusted to meet customer requirements.

Circuit Reference Examples Specified usage examples

① Direct connection type

Application


Toys, DC motors, IoT,etc.



② Combination-type primary battery

Application


Clocks (both wall and table clocks), thermometer/hygrometers, remote controls, calculators, IoT,etc.

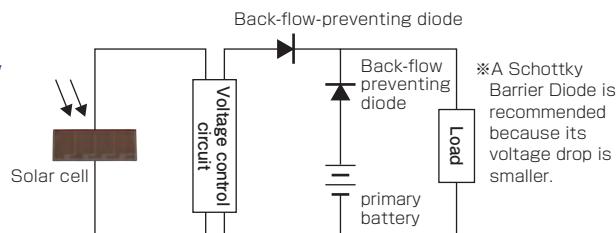

③ Rechargeable battery

Application

Watches (wristwatches), clocks (both wall and table clocks), garden lights, PC peripheral devices, mobile chargers, battery chargers, short-range communication terminals, car accessories, LED lighting devices, flickering devices, traffic buttons, IoT

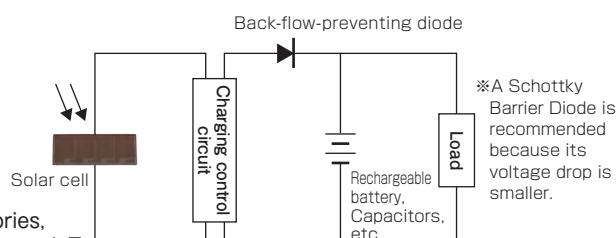

Inquiry Sheet

By providing the following information, we can respond to your inquiries more smoothly. Please contact us at the information found on the back cover.

■ In the case of general purpose products

Application (Please provide the following information)	
Products name	
Usage environment (indoors or outdoors)	
Types of rechargeable battery	
Terminal connection method	
Experience of using solar cell (Yes or No)	
Other requests	

■ In the case of customized products

Application (Please provide the following information)	
Usage environment (indoors or outdoors)	
External dimensions (installation space)	
Required voltage	
Required current	
Types of rechargeable battery	
Terminal connection method	
Experience of using solar cell (Yes or No)	
Other requests	



Amorton



North America

Europe

Asia Pacific

China

Japan

Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe

► Headquarters	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-1550, www.panasonic-electric-works.com
► Austria	Panasonic Electric Works Austria GmbH	Josef Madersperger Str. 2, 2362 Biedermannsdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	Panasonic Industrial Devices Materials Europe GmbH	Ennshafenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
► Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
► Czech Republic	Panasonic Electric Works Europe AG, organiza ní složka	Administrative centre PLATINIUM, Veveří 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, www.panasonic-electric-works.cz
► France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tel. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, www.panasonic-electric-works.fr
► Germany	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.de
► Hungary	Panasonic Electric Works Europe AG	Magyarországi Fióktelepe, 1117 Budapest, Alíz utca 4, Tel. +43 (0) 2236 26846 -25, Fax +43 (0) 2236 46133 www.panasonic-electric-works.hu
► Ireland	Panasonic Electric Works UK Ltd.	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
► Italy	Panasonic Industry Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, www.panasonic-electric-works.it
► Nordic Countries	Panasonic Electric Works Europe AG	Filial Nordic, Knarrnäsgatan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se
	Panasonic Fire & Security Europe AB	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
► Poland	Panasonic Electric Works Polska sp. z o.o.	ul. Wofoska 9A, 02-583 Warszawa, Tel. +48 42 230 9633, www.panasonic-electric-works.pl
► Spain	Panasonic Electric Works España S.A.	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
► Switzerland	Panasonic Electric Works Schweiz AG	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
► United Kingdom	Panasonic Electric Works UK Ltd.	Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk

North & South America

► USA	Panasonic Industrial Devices Sales Company of America	Two Riverfront Plaza, 7th Floor, Newark, NJ 07102-5490, Tel. 1-8003-442-112, www.pewa.panasonic.com
-------	---	---

Asia Pacific/China/Japan

► China	Panasonic Electric Works Sales (China) Co. Ltd.	Tower C 3rd Floor, Office Park, NO.5 Jinhua South Street, Chaoyang District, Beijing 100020, Tel. +86-10-5925-5988, Fax +86-10-5925-5980
► Hong Kong	Panasonic Industrial Devices Sales (HK) Co., Ltd.	Suite 301, 3/F, Chinachem Golden Plaza, 77 Mody Road, TST East, Kowloon, Hong Kong, Tel. +852-2529-3956, Fax +852-2528-6991
► Japan	Panasonic Corporation	1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501, Japan, Tel. +81-6-6908-1121, www.panasonic.net
► Singapore	Panasonic Industrial Devices Automation Controls Sales Asia Pacific	No.3 Bedok South Road, Singapore 469269, Tel. +65-6299-9181, Fax +65-6390-3953