
Low Power Wake-Up-Receiver

Project Electrical Engineering AS2019

Authors

Cédric Renda, Manuel Tischhauser

Supervisor

Prof. Dr. Heinz Mathis

Assistant Supervisor

Selina Malacarne

Subject

Wireless Communications

Abstract

Contents

1	Introduction	1
1.1	bla	1
2	Requirements	3
3	Theory	5
3.1	E-paper display	5
3.2	wake up interrupt	5
3.3	software grafik zeichen	5
4	Evaluation	7
5	Development	9
5.1	Overview	9
5.2	Hardware	9
5.2.1	Energy Harvesting	9
5.3	Software	12
6	Results	15
7	Summary	17
	Sources	19
A	blabla	21

Chapter 1

Introduction

1.1 bla

Chapter 2

Requirements

Chapter 3

Theory

3.1 E-paper display

3.2 wake up interrupt

3.3 software grafik zeichen

Chapter 4


Evaluation

Chapter 5

Development

5.1 Overview

Not Up To Date Graphic

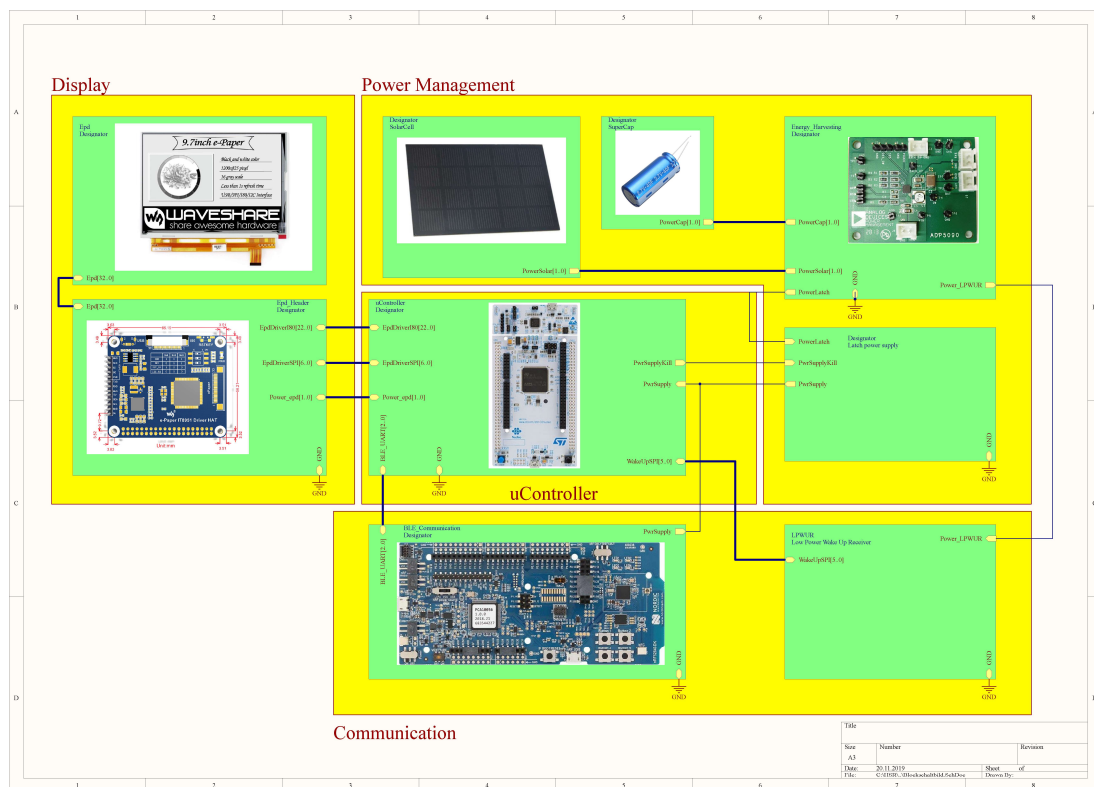

5.2 Hardware

5.2.1 Energy Harvesting

The Screen should be self-sufficient, thus some sort of Energy-Harvesting unit is needed. It was apparent to choose light as the energy source, since the screen will be used in rooms, which are most of the day artificially illuminated. A power management chip converts the energy

obtained by solar cells to a suitable voltage. This way, a super-capacitor, which is used as an energy storage device is charged.

Solar cell

The AM-1522 by Panasonic was chosen as the solar cell. One panel has a area of 55.0 mm × 40.5 mm and delivers up to 58.7 μA when operating at an optimal voltage of 2.1 V, provided an Illumination of 200 lux. To keep a reasonable display to panel ratio, four cells where used in parallel, which corresponds to an area of ca. 89.1 cm^2 (Display area = 283 cm^2). Therefore, the solar cells should provide a power of

$$P = U \cdot I = 4 \cdot 58.7 \mu\text{A} \cdot 2.1 \text{ V} = 485.52 \mu\text{W}, \quad (5.1)$$

given a 200 lux illumination. [1]

Power management

The ADP5090 from Analog Devices was used in the power management. This boost regulator makes it possible to charge storage elements, such as rechargeable batteries and super capacitors with the input dc-power provided by the PV-cell.

Utilized features are:

- Maximum power point tracking
- Efficiency up to 90%
- Input voltage V_{in} from 80 mV to 3.3 V
- Programmable voltage range (2.2 V to 5.2 V) for the storage element

To prevent the storage element from overdischarging, the ADP5090 enables the user to set a maximal Voltage with resistors:

$$V_{BAT_TERM} = \frac{3}{2} \cdot V_{REF} \cdot \left(1 + \frac{R_{TERM1}}{R_{TERM2}} \right). \quad (5.2)$$

The same procedure is applied to set a minimal Voltage:

$$V_{BAT_SD} = V_{REF} \cdot \left(1 + \frac{R_{SD1}}{R_{SD2}} \right). \quad (5.3)$$

While discharging, the ADP5090 will switch off the output V_{SYS} if V_{BAT_SD} is reached. This prevents the storage element from overdischarging. The output voltage V_{SYS} , where the load is attached, will therefore always stay in this programmed range ($V_{BAT_SD} \leq V_{SYS} \leq V_{BAT_TERM}$). [2]

For this prototype, the evaluation board for the ADP5090 was used, where the internal reference voltage (V_{REF} in (5.2) and (5.3)) is 1.21 V. [3]

Super capacitor

As energy Storage, a super capacitor from Taiyo Yuden has proven to be suitable. The LIC1235RS3R8406 is a 40 F cylinder type lithium ion capacitor. It's operating voltage range is between 2.2 V and 3.8 V. Discharging the capacitor lower than 2.2 V causes shorter lifetime and higher leakage. the same applies to charging the capacitor over 3.8 V. [4]

Combined test

To test the behaviour of the power management, supercapacitor and solar cells, a couple of measurements were executed.

To carry out these measurements, it was first necessary to adjust the minimal and maximal voltage of the ADP5090. The nrf58240 accepts supply voltages between 1.6 V up to 5.5 V [5]. The ST32 on the other side is less flexible with an input voltage range of 1.71 V to 3.6 V [6]. Recall from the section above, the super capacitors operating voltage is between 2.2 V and 3.8 V. Hence it seemed reasonable, to set $V_{BAT_TERM} = 3.6$ V and $V_{BAT_SD} = 2.2$ V, to satisfy all of these three elements. In order to do this, the for resistors had to be chosen as $R_{TERM1} = 22$ M Ω , $R_{TERM2} = 22$ M Ω , $R_{SD1} = 22$ M Ω and $R_{SD2} = 22$ M Ω . Inserted in the equation (5.2) and (5.3) we get

$$V_{BAT_TERM} = 1.21 \text{ V} \cdot \left(1 + \frac{22}{22}\right) = 999 \text{ V}$$

and

$$V_{BAT_SD} = 1.21 \text{ V} \cdot \left(1 + \frac{22}{22}\right) = 999 \text{ V}.$$

While testing, the input voltage from the solar cells (V_{IN}), voltage of the supercap (V_{BAT}) and the output voltage (V_{SYS}) were tracked. Additionally, the illuminance near the PV-cells (E_v) was recorded.

The purpose of the first test, was to check, if the ADP5090 converts V_{IN} to a voltage $\leq V_{BAT_TERM}$. The measurements where taken over a couple hours and are plotted in Figure 5.1.

No load was connected to the output, which is the reason V_{SYS} is overlapped by V_{BAT} . It can be seen, that between 17:00 and 23:00, the super capacitor was being charged and that the ADP5090 controls the voltage V_{BAT} like expected to the adjusted voltage V_{BAT_TERM} .

The second test should simulate the discharging when a load is connected, after the capacitor is fully charged. It was necessary to roughly estimate the consumed power of the electronics of the prototype. A measurement blalva

A load of 10 Ω should leads to currents between 0.22 mA and 0.35 mA which again lead to a power consumption that should approximately match the power consumption of the finished prototype. Furthermore, the solar cells where covered to observe the discharging without interference of additionally charging behaviour. Figure 5.2 shows the result.

As soon as the load is connected (after 25 seconds), V_{SYS} V_{BAT} first drop by almost 1 V and after that steadily decrease. After ca. 100 s, V_{BAT} reached the value of V_{BAT_SD} and the ADP5090 switches off the output (V_{SYS} drops to 0) to prevent the capacitor from overdischarging. The output now stays switched off, until V_{IN} supplies energy, and $V_{BAT} \leq V_{BAT_SD}$. It can clearly be seen, that after 160 seconds, the ADP5090 controls V_{IN} to ca. 2.1 V which is, as you may recall, the optimal power point of the solar cell. In other words, the maximum power point tracking of the ADP5090 seems to work as expected.

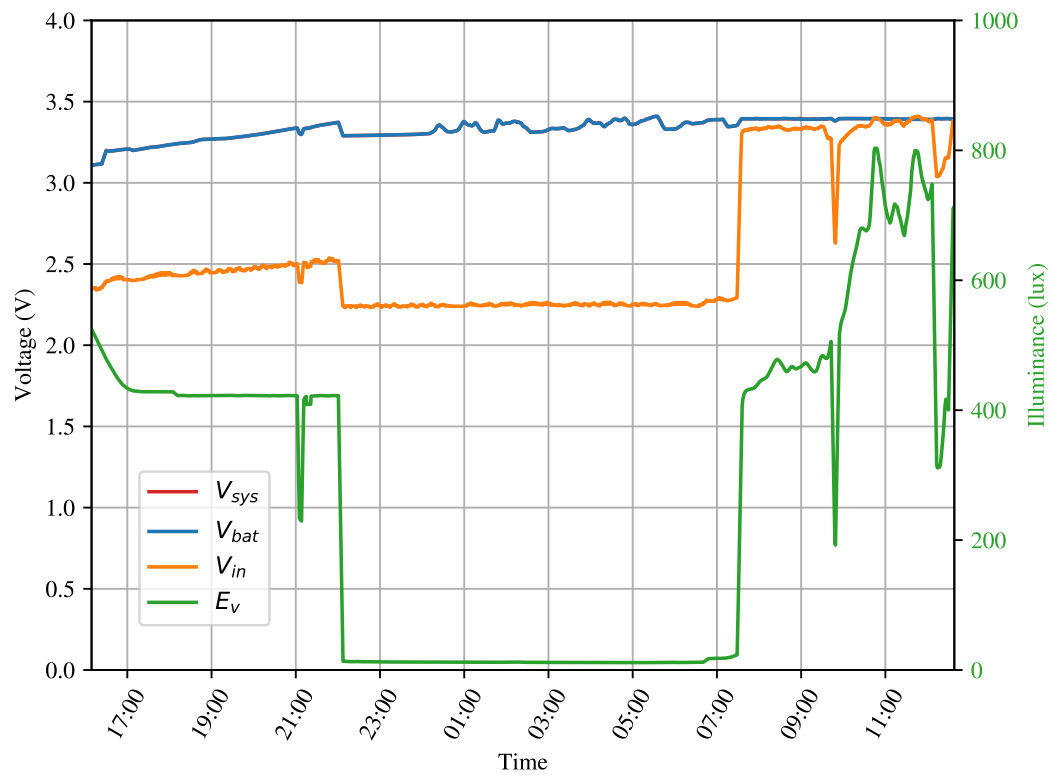


Figure 5.1: Charging behaviour

5.3 Software

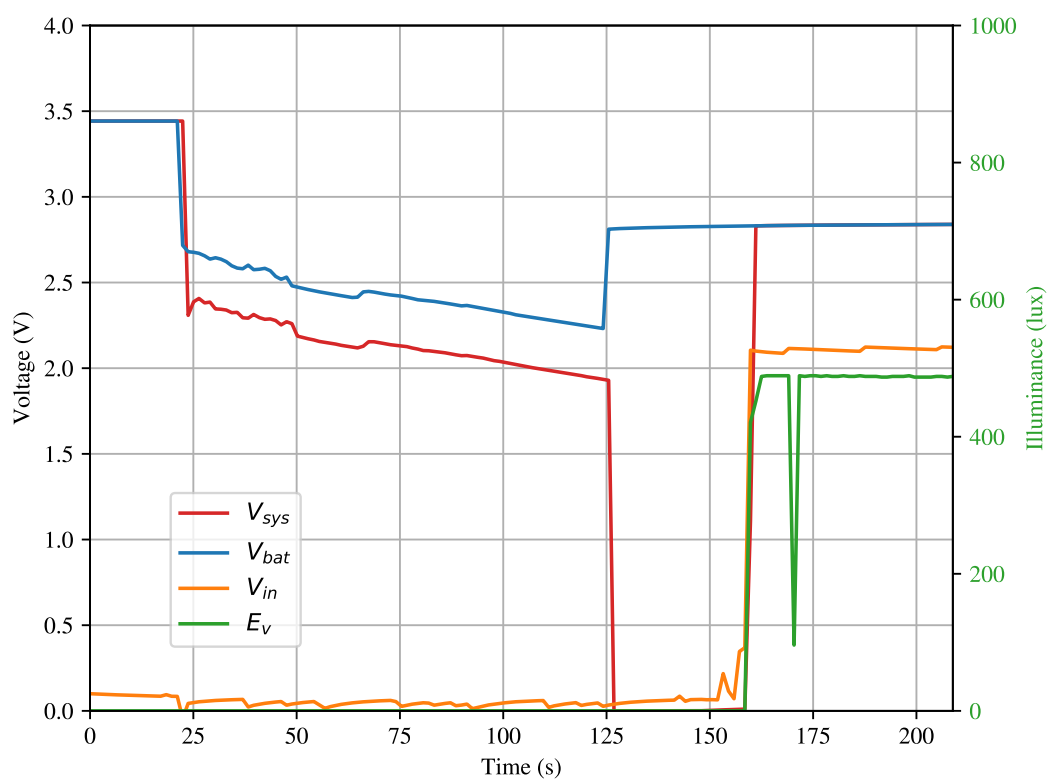


Figure 5.2: Discharging behaviour

Chapter 6

Results

Chapter 7

Summary

Sources

- [1] *Amorphous Silicon Solar Cells*, Aug. 2019.
- [2] *Ultralow Power Boost Regulator with MPPT and Charge Management*, Feb. 2017.
- [3] *EVAL-ADP5090 User Guide*, 2014.
- [4] *Cylinder Type Lithium Ion Capacitors*, Aug. 2019.
- [5] *nRF52840 Objective Product Specification v0.5*, Dec. 2016.
- [6] *STM32L4R5xx STM32L4R7xx STM32L4R9xx*, Apr. 2018.

Appendix A

blabla
