

STYLE Z1

SPOT DOWN SERIES



Model No: LM-C05-STZ1TL-7W**


DESCRIPTION

Exquisite physique design makes it suitable for all kinds of low ceiling and narrow spaces.


AREAS OF APPLICATION

• Star-Rated Hotels • Villas • Residential Buildings

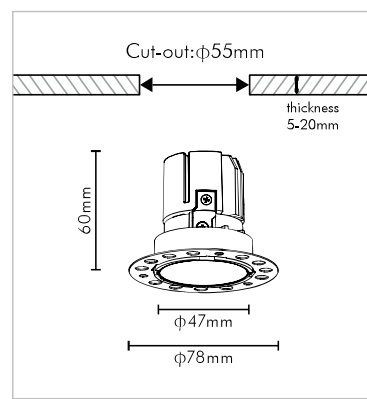




DIAGRAM

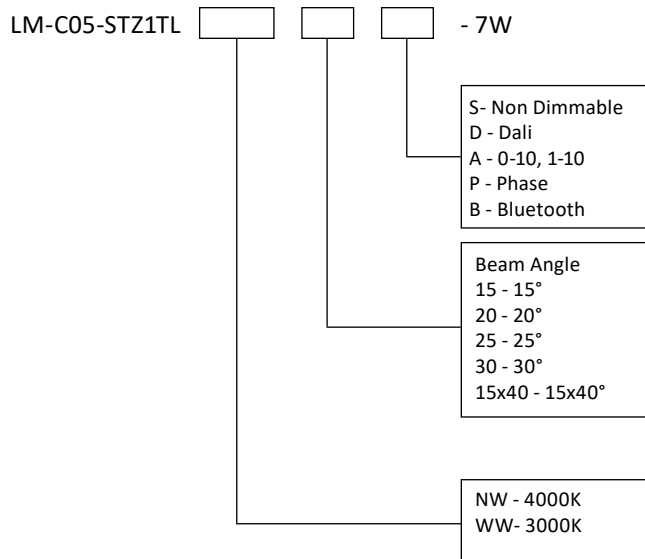

MODEL NUMBER SELECTION



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

7W 15° 3000K Ra90				7W 20° 3000K Ra90				7W 25° 3000K Ra90				7W 30° 3000K Ra90				7W 15°x40° 3000K Ra90			
H(m)	E(lx)	D(m)		H(m)	E(lx)	D(m)		H(m)	E(lx)	D(m)		H(m)	E(lx)	D(m)		H(m)	E(lx)	D(m)	
1	3499	0.23		1	2679	0.35		1	1951	0.44		1	1469	0.57		1	1348	0.28	
2	875	0.45		2	670	0.69		2	488	0.87		2	367	1.14		2	337	0.56	
3	389	0.68		3	298	1.04		3	217	1.31		3	163	1.70		3	150	0.85	
4	219	0.90		4	168	1.39		4	122	1.74		4	92	2.27		4	84	1.13	
5	140	1.13		5	107	1.73		5	78	2.18		5	59	2.84		5	54	1.41	
HEIGHT	ILLUMINANCE	DIAMETER		HEIGHT	ILLUMINANCE	DIAMETER		HEIGHT	ILLUMINANCE	DIAMETER		HEIGHT	ILLUMINANCE	DIAMETER		HEIGHT	ILLUMINANCE	DIAMETER	

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20/IP54
Cut-Out Size	55 (mm)	IK-Rating	IK03
Dimension	D78 x H60 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	Specular/Dark Chrome/White/ Golden / Black	Optional Accessories	Honeycomb/Glass/ Trim with spring

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	150mA	Beam Angle	15°/20°/25°/30°/15°x40°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	5.4W	Power Factor	0.5W
System Power	7W	UGR	<13
LED Luminous Flux	338~432 lm, 383~468 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Voltage	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.