

ANLOCK SQ I

SPOT DOWN SERIES



Model No: LM-C03-ANS1T-8W**


DESCRIPTION

Small size, high power, unique square design make lighting and the ceiling have more outstanding coordination, which can help you make more excellent designs

AREAS OF APPLICATION

- Hotels • Clubs • Bars • Restaurants • Conference Centers
- Residences • Shopping Malls

DIAGRAM

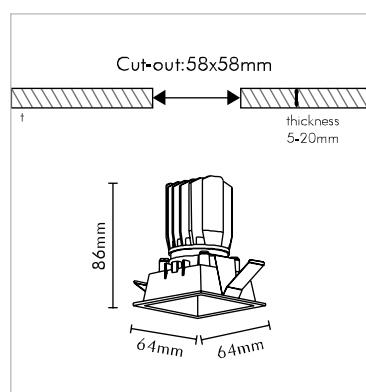

MODEL NUMBER SELECTION

LM-C03-ANS1T


- 8W

S - Non Dimmable
D - Dali
A - 0-10, 1-10
P - Phase
B - Bluetooth

Beam Angle
21 - 21°
35 - 35°

NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

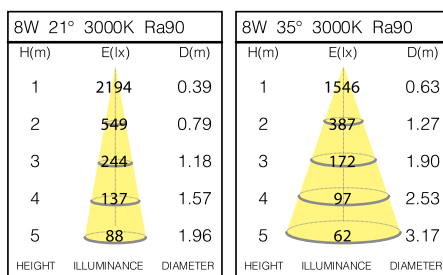

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	58 x 58 (mm)	IK-Rating	IK03
Dimension	64 x 64 x 86 (SxH) (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	200mA	Beam Angle	15°/25°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	7.2W	Power Factor	0.9W
System Power	8W	UGR	<19
LED Luminous Flux	610~623 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.