

DWARF

SURFACE & FACADE LUMINAIRES



Model No: LM-015-FDML3-3.5W**

TECHNICAL DESCRIPTION

Surface mounted with accessory brackets, Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


INSTALLATION

Surface mounted with available brackets.


AREAS OF APPLICATION

- Facade

DIAGRAM

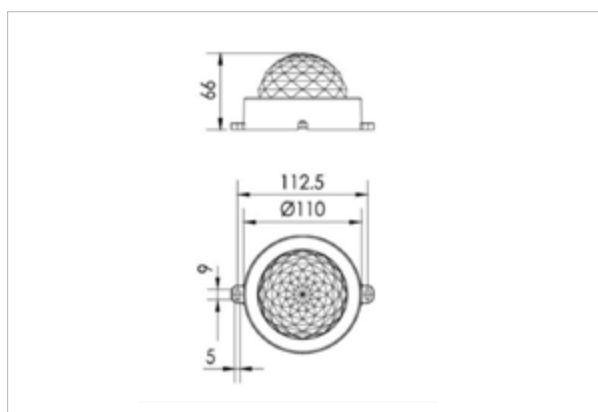

MODEL NUMBER SELECTION

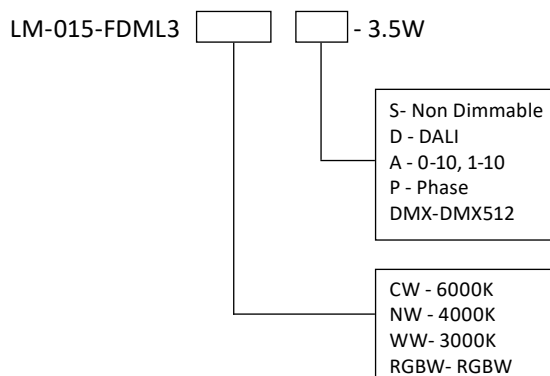

PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP68
Driver	Integrated	IK-Rating	IK09
Dimension	D110 x H66 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	Grey, Black
Diffuser	Tempered Glass	Optional Accessories	N/A
Rotation	Fixed		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux, LUXEON	Beam Angle	120°
LED Power	3.5W	Dimming Options	NON-DIM, 1-10V, DALI, DMX512
LED Luminous Flux		Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, MEANWELL
Color Rendering Index	≥80/90	Options On Request	Honey comb Louver, Anti Glare Shield
UGR	<22	Control Mode	DMX512/CC
Color Temperature	2700K-6000K, RGBW		

PRODUCT SPECIFICATION

Input Volatge	DC 24V	Environmental Temp	-25°C ~ +50°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.