

# WINX 3

UNDERWATER SERIES



**Model No: LM-B12-WNZ3\*\*-5W**

## TECHNICAL DESCRIPTION

Extruded aluminium alloy body, surface with anodizing treatment, high strength toughened glass, DMX512 interface adopts high reliable bus connect.


## INSTALLATION

Recessed

## AREAS OF APPLICATION

• Swimming Pools • Water Feature

## DIAGRAM

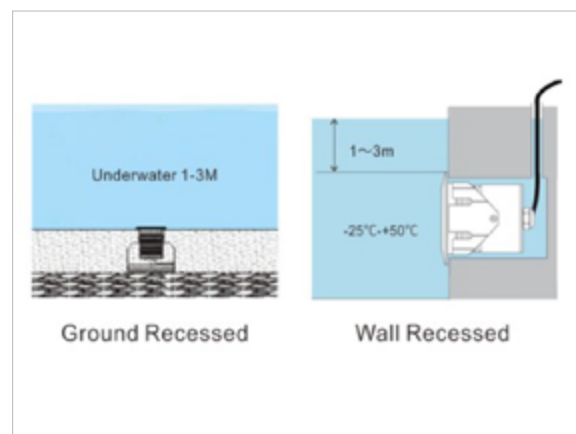

## MODEL NUMBER SELECTION

LM-B12-WNZ3    -5W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX-DMX512

Beam Angle  
15-15° 6x40-6°x40°  
24-24° 10x20-10°x20°  
38-38° 10x30-10°x30°  
60-60°  
40-40°

CW - 6000K  
NW - 4000K  
WW- 3000K  
RGBW-RGBW

## PHYSICAL CHARACTERISTICS

Installation	Recessed	IP-Rating	IP68
Driver	Integrated	IK-Rating	IK08
Adjustability	Fixed	Fixture Material	316 Chrome Plated Stainless Steel
Diffuser	Tempered Glass	Standard Finish	Stainless Steel
Rotation	Fixed	Optional Accessories	N/A

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	40°/6°x40°/10°x20°/10°x30°
LED Power	5W	Dimming Options	NON-DIM, 1-10V, DALI, DMX512
LED Luminous Flux	240lm	Power Factor	0.9
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER / MEANWELL / TRIDONIC
Color Rendering Index	≥80/90	Options On Request	N/A
UGR	<22		
Color Temperature	RGBW 4in1 DMX512		

## PRODUCT SPECIFICATION

Input Volatge	DC24V	Environmental Temp	-25°C ~ +50°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.