RUBY

BULKHEAD & WALL LIGHT

CE | IP65 | ▣

RoHS | CCC | F▽
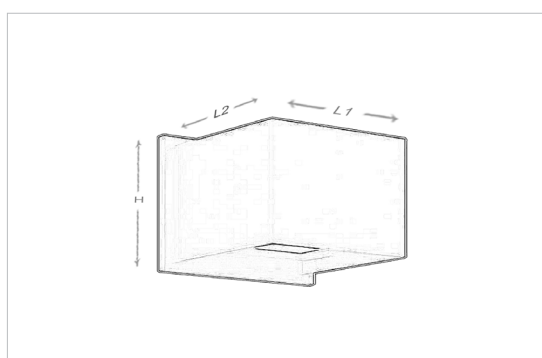
Lyte Master®

Model No: LM-002-WSQ4**-12W

INSTALLATION

Suitable for ceiling or wall installation with 4 fixing points. Approved for indoor use or in outdoor areas, protected by a roof.
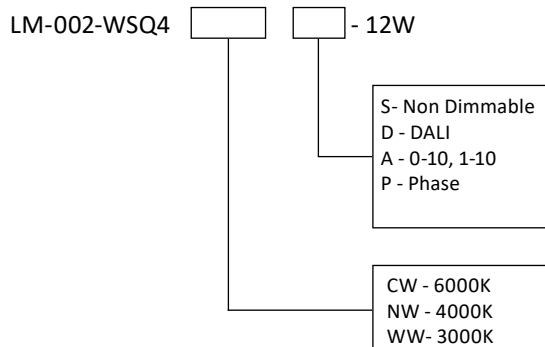
AREAS OF APPLICATION

• Supplementary lighting, for Indoor and Outdoor

DIAGRAM

MODEL NUMBER SELECTION

LM-002-WSQ4 ☐ ☐ - 12W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase

CW - 6000K
NW - 4000K
WW- 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

PHYSICAL CHARACTERISTICS

Installation	Wall Mounted		IP-Rating	IP65
Driver	Integrated		IK-Rating	IK10
Dimension	L1-100 x L2-100 x H-100 (mm)		Fixture Material	Die Cast Aluminium
Adjustability	Fixed		Standard Finish	White, Black
Lens	PMMA		Optional Accessories	N/A
Rotation	Non Adjustable			

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux		Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	12W		Power Factor	0.9
LED Luminous Flux	1200lm		UGR	<13
Chromaticity Tolerance	SDCM≤3		Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80/90		Extended Configuration	2700K, 5000K
Color Temperature	3000K, 4000K, 6000K		Options On Request	N/A
Beam Angle	60°, 10~90°			

PRODUCT SPECIFICATION

Mains Volatge	85-265V		Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz		Rated Service Life (h)	55,000
Safety Class	II		Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.