

ANLOCK SQ IV

SPOT DOWN SERIES



Model No: LM-C03-ANS4T-12W**


DESCRIPTION

The high power square adjustable design can help you accurately project light onto object, highlighting individual area or object


AREAS OF APPLICATION

- Hotels • Clubs • Bars • Restaurants • Conference Centers
- Residences • Shopping Malls


DIAGRAM

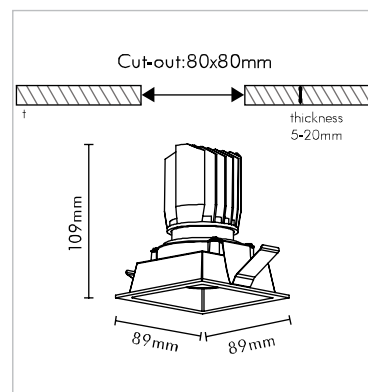

MODEL NUMBER SELECTION

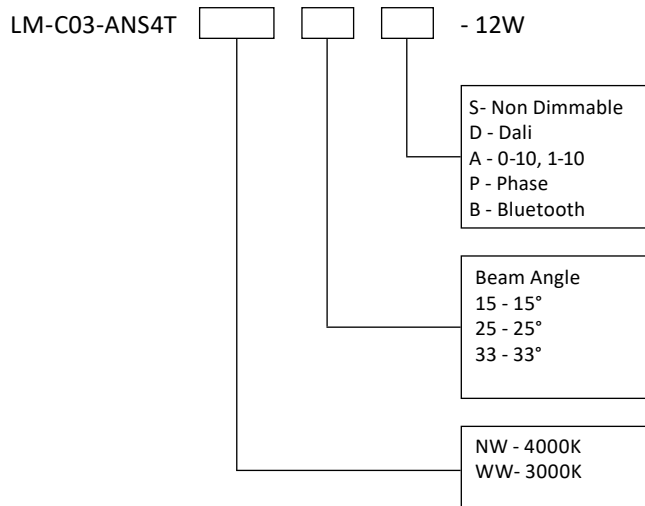

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

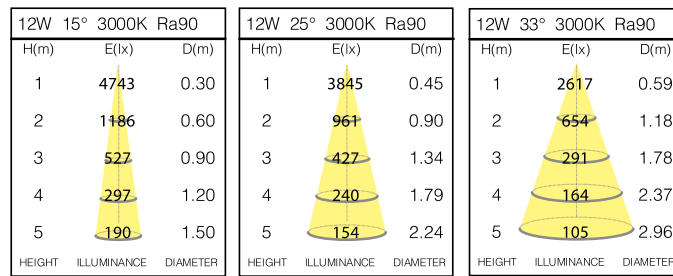

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Rotatable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	80 x 80 (mm)	IK-Rating	IK03
Dimension	89 x 89 x 109 (SxH) (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Tilt +/-20	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	350mA	Beam Angle	15°/35°/33°
LED Voltage	31V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	10.9W	Power Factor	0.9W
System Power	12W	UGR	<19
LED Luminous Flux	782~917 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.