

ANLOCK RD I

SPOT DOWN SERIES



Model No: LM-C03-ANR1TP-7W**


DESCRIPTION

Small size design, suitable for low ceiling space, a variety of different trims and reflectors collocation make the space more harmonious.


AREAS OF APPLICATION

- Hotels • Residences • Shopping malls
- Semi Outdoor Spaces • Wet Areas Requiring Anti Fogging.


DIAGRAM

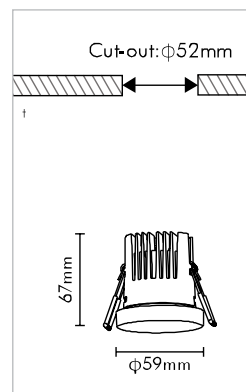

MODEL NUMBER SELECTION

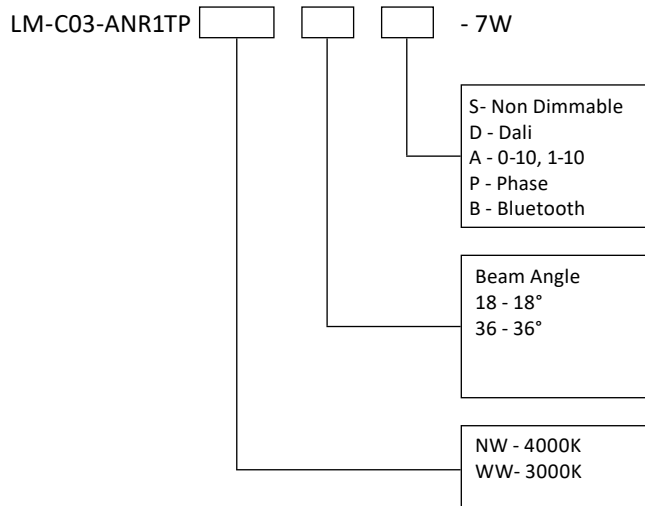

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

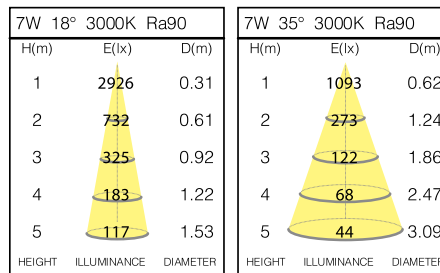

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP54
Cut-Out Size	52 (mm)	IK-Rating	IK03
Dimension	D59 x H67 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	200mA	Beam Angle	18°/36°
LED Voltage	31V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	6.2W	Power Factor	0.9W
System Power	7W	UGR	<19
LED Luminous Flux	412~446 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.