

# ANLOCK SQ II

SPOT DOWN SERIES



**Model No: LM-C03-ANS2T\*\*-8W**


## DESCRIPTION

The unique square design of the recessed adjustable spotlight makes the lamp better match with the ceiling, and can help you accurately project the light onto the object, highlighting a single area or object.


## AREAS OF APPLICATION

- Hotels • Clubs • Bars • Restaurants • Conference Centers
- Residences • Shopping Malls


## DIAGRAM

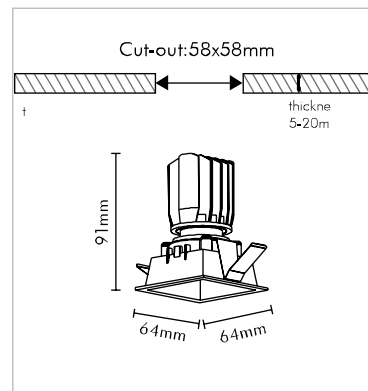

## MODEL NUMBER SELECTION

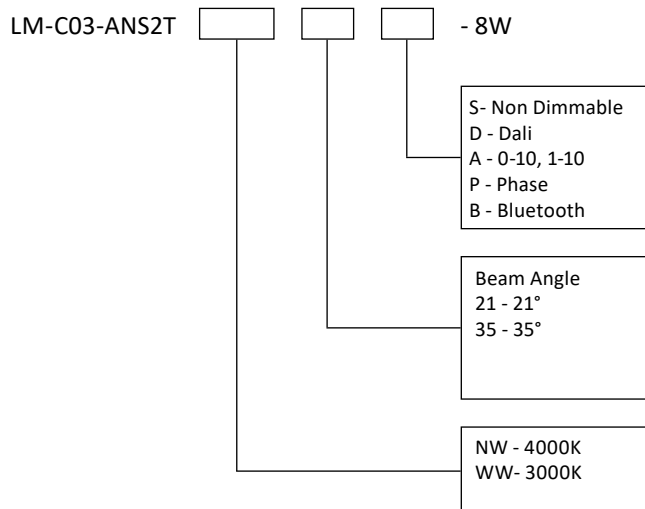

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

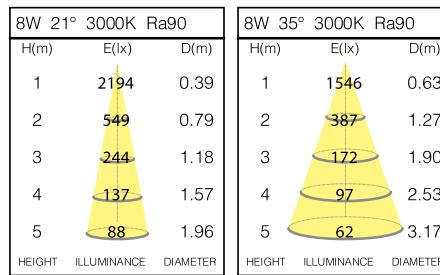

## PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP20
Cut-Out Size	58 x 58 (mm)	IK-Rating	IK03
Dimension	64 x 64 x 91 (SxH) (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

## ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	200mA	Beam Angle	15°/25°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	7.2W	Power Factor	0.9W
System Power	8W	UGR	<19
LED Luminous Flux	514~520 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

## PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.