


# MEZTA I

FOCUS & SPIKE



**Model No: LM-B04-MZA3\*\*-54W**

## TECHNICAL DESCRIPTION

Special housing design and high-quality optical components specifically for demanding visual tasks to provide enhanced visual comfort. Discreet and compact aesthetically designed architectural outdoor spotlight, Ideal for Glare-Free Accent Lighting, Flood lighting and Wall washing in Outdoor Area.


## INSTALLATION

Floor/ Wall mounted, Spike mounted, Tree or Pole mounted

## AREAS OF APPLICATION

• Facade • Garden • Focus Light

## DIAGRAM

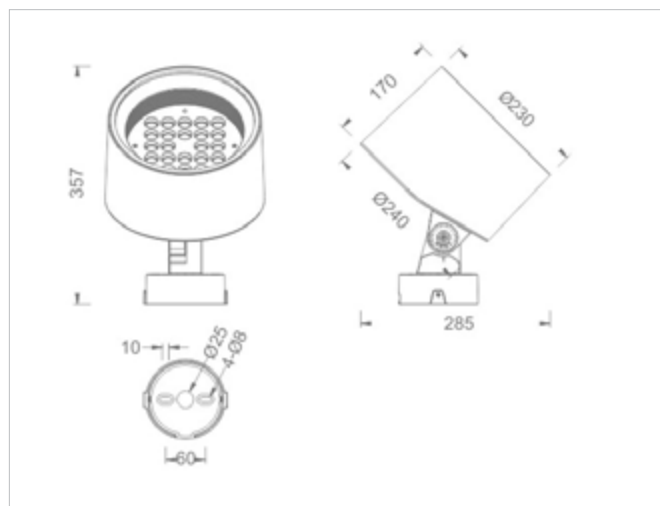

## MODEL NUMBER SELECTION

LM-B04-MZA3    - 54W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase  
DMX-DMX512/RDM

Beam Angle 45-45°  
10-10° 55-55°  
15-15° 28x38-28x38°  
25-25° 15x50-15x50°  
30-30° 20x45-20x45°

CW - 6000K  
NW - 4000K  
WW- 3000K  
RGBW-RGBW

## PHYSICAL CHARACTERISTICS

Installation	Surface, Pole, Spike	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK04
Dimension	D: 230, L: 170, H: 357 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Vertical Tilttable	Standard Finish	Silver, Black, White
Diffuser	Tempered Glass	Optional Accessories	Mounting Brackets, Spike, Honey Comb, Hood
Rotation	Mounting Plate rotatable 355°		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Color Temperature	2700K-6000K
LED Power	54W	Beam Angle	10°/15°/25°/30°/45°/55°/28x38° 15x50°/20x45°
LED Luminous Flux	4590lm-4860lm	Dimming Options	NON-DIM, PHASE, 1-10V, DALI, DMX 512/RDM
Chromaticity Tolerance	SDCM≤3	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Color Rendering Index	>80/90	Options On Request	Filters, Diffusers, Honeycomb louvers, Refractor for elliptical distribution.

## PRODUCT SPECIFICATION

Mains Voltage	AC220V 90-305 VAC	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.