


# LINEA

HIGH BAY SERIES

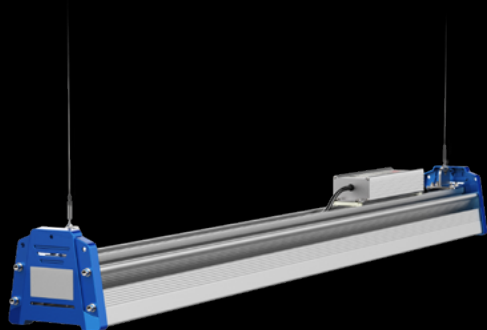

**Model No: LM-010-HBLP1\*\*-120W**

## TECHNICAL DESCRIPTION

Linea Lights are high quality light fittings designed for long life and low maintenance. Combined with the subtle closed design, this results in a much calmer ceiling appearance with increased efficiency.


## INSTALLATION

Suspended

## AREAS OF APPLICATION

- Factories • Warehouses • Supermarkets
- Other Large Areas

## DIAGRAM

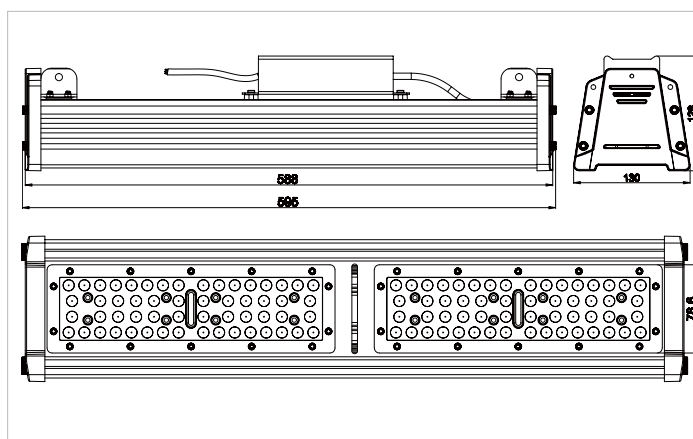


## MODEL NUMBER SELECTION

LM-010-HBLP1  - 120W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase

CW - 6000K  
NW - 4000K  
WW - 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

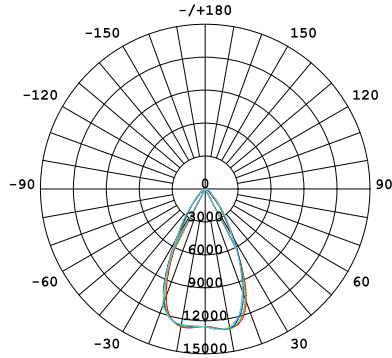

## PHYSICAL CHARACTERISTICS

Installation	Suspended
Driver	Integrated
Dimension	L600 x B130 x H130 (mm)
Adjustability	Non Adjustable
Diffuser	PMMA Lens
Rotation	Fixed

IP-Rating	IP65
IK-Rating	IK10
Fixture Material	Die Cast Aluminium
Standard Finish	White, Black, White + Black

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux
LED Power	120W
LED Luminous Flux	15600lm
Chromaticity Tolerance	SDCM≤6
Color Rendering Index	≥80
Color Temperature	3000K, 4000K, 6000K

Beam Angle	30°/60°/90°/120°
Dimming Options	NON-DIM, PHASE, 1-10V, DALI
Power Factor	0.9
Driver Options	LYTEMASTER / MEANWELL / TRIDONIC
Options On Request	Micro Wave Sensor Daylight Sensor, 80°/120° Aluminium Reflector

## PRODUCT SPECIFICATION

Mains Voltage	AC100-277V
Frequency	50/60 Hz
Safety Class	I

Environmental Temp	-30°C ~ +45°C
Rated Service Life (h)	55,000
Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.