

BEQ 65

CEILING SURFACE SERIES



Model No: LM-011-BQ65-30W**

TECHNICAL DESCRIPTION

Surface mounted round luminaire designed to use LED lamps with C.o.B. technology. Clear diffuser, with aluminium reflector complete with flux enhancer. Body made of painted white die-cast aluminium. Product complete with LED lamp in different CCT. General lighting beam.


INSTALLATION

Surface mounted to ceiling with clamps and screws which will not be visible outside.


AREAS OF APPLICATION

- Hotel • Club • Airport • Store • Office
- Residential • Commercial.


DIAGRAM

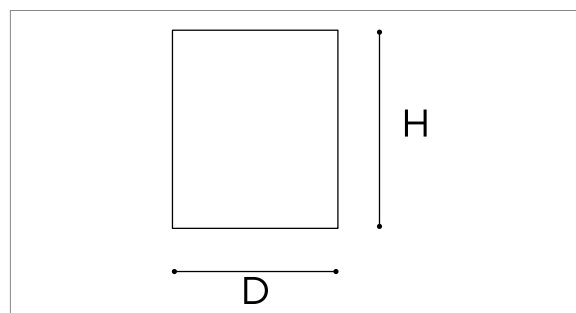

MODEL NUMBER SELECTION

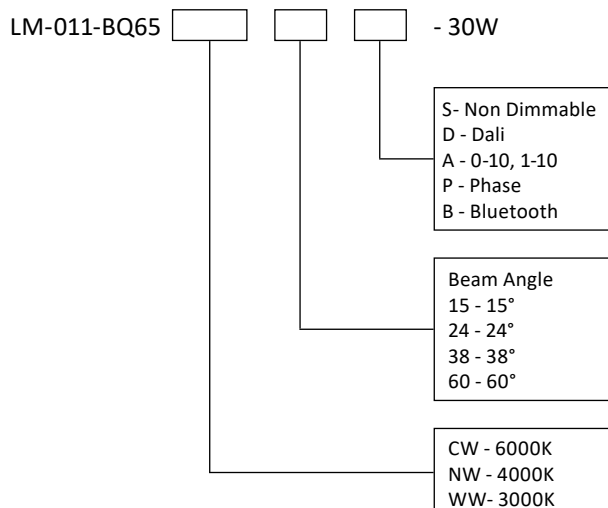

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

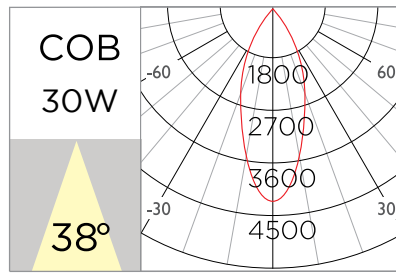

PHYSICAL CHARACTERISTICS

Installation	Ceiling Mounted	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK05
Dimension	D140 x H165 (mm)	Fixture Material	Extruded Aluminium
Adjustability	Fixed	Standard Finish	White, Black, White+Black
Diffuser	Glass	Optional Accessories	Honey Comb Louver (HC-BQ65), Frosted Diffuser (FR-02)
Rotation	Non Adjustable		

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Color Temperature	3000K, 4000K, 6000K
LED Current	700mA	Beam Angle	15°/24°/38°/60°
LED Voltage	42V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	30W	Power Factor	0.9
System Power	29.4W	UGR	<19
LED Luminous Flux	2800lm	Driver Options	LYTEMASTER, TRIDONIC, OSRAM
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	N/A

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.