


ANLOCK RD II

SPOT DOWN SERIES

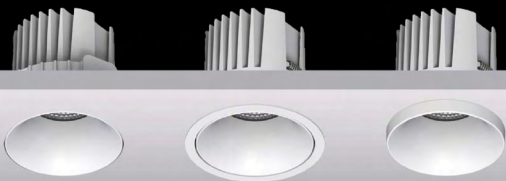

Model No: LM-C03-ANR2TP-15W**


DESCRIPTION

A variety of different trims and reflectors collocation make the space more harmonious. At the same time, it can provide you with higher brightness, meet higher and larger space lighting requirements, and provide more luminous flux.


AREAS OF APPLICATION

- Hotels • Residences • Shopping malls
- Semi Outdoor Spaces • Wet Areas Requiring Anti Fogging.


DIAGRAM

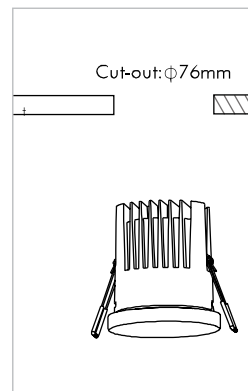

MODEL NUMBER SELECTION

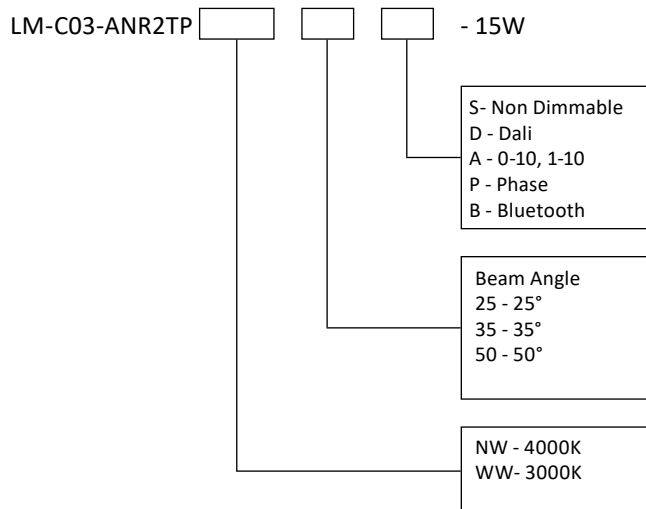

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

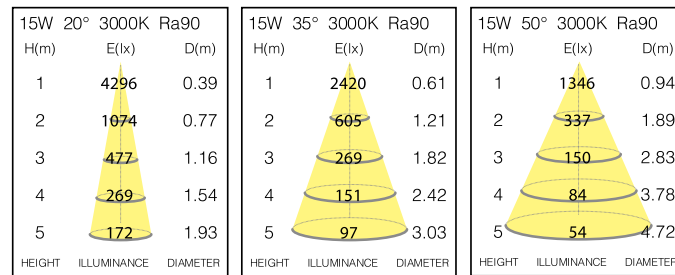

PHYSICAL CHARACTERISTICS

Installation	Recessed	Rotation	Non Adjustable
Driver	Remote	IP-Rating	IP54
Cut-Out Size	76 (mm)	IK-Rating	IK03
Dimension	D97 x H82 (mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White / Black
Reflector	White / Black / Gold	Optional Accessories	Trim with sprin

ELECTRICAL CHARACTERISTICS

Light Source	Citizen	Color Temperature	3000K, 4000K
LED Current	350mA	Beam Angle	25°/35°/50°
LED Voltage	36V	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Power	12.6W	Power Factor	0.9W
System Power	15W	UGR	<19
LED Luminous Flux	852~879 lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Extended Configuration	2700K, 5000K
Color Rendering Index	>80/90	Options On Request	Bluetooth

PRODUCT SPECIFICATION

Mains Volatge	220-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.