


ZESTA IV

FOCUS & SPIKE



Model No: LM-B03-ZSA1-48W**

TECHNICAL DESCRIPTION

Special housing design and high-quality optical components specifically for demanding visual tasks to provide enhanced visual comfort. Discreet and compact aesthetically designed architectural outdoor spotlight, Ideal for Glare-Free Accent Lighting, Flood lighting and Wall washing in Outdoor Area.


INSTALLATION

Floor/ Wall mounted, Spike mounted, Tree or Pole mounted

AREAS OF APPLICATION

• Facade • Garden • Focus Light

DIAGRAM

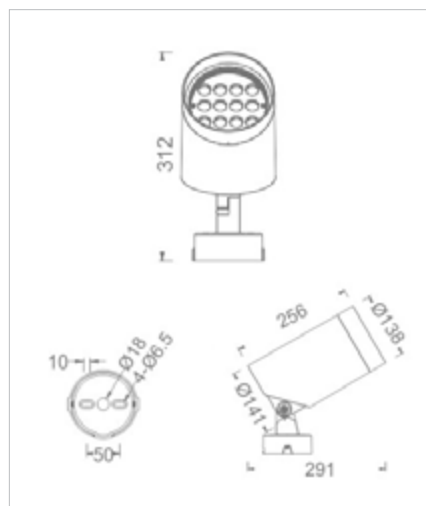

MODEL NUMBER SELECTION

LM-B03-ZSA1 - 48W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase
DMX - DMX512

Beam Angle
10-10° 45-45°
15-15° 55-55°
25-25° 28*38-28*38°
30-30° 15*50-15*50°
20*45-20*45°

CW - 6000K
NW - 4000K
WW- 3000K
RGBW-RGBW

PHYSICAL CHARACTERISTICS

| | | | |
|---------------|-------------------------------|----------------------|--|
| Installation | Surface, Pole, Spike | IP-Rating | IP66 |
| Driver | Integrated | IK-Rating | IK04 |
| Dimension | D: 138, L: 256, H: 312 (mm) | Fixture Material | Die Cast Aluminium |
| Adjustability | Vertical Tilttable | Standard Finish | Silver, Black |
| Diffuser | Tempered Glass | Optional Accessories | Mounting Brackets, Spike, Honey Comb, Hood |
| Rotation | Mounting Plate rotatable 355° | | |

ELECTRICAL CHARACTERISTICS

| | | | |
|------------------------|---------------|--------------------|---|
| Light Source | Bridgelux | Color Temperature | 2700K-6000K |
| LED Power | 48W | Beam Angle | 10°/15°/25°/30°/45°/55°/28x38° 15x50°/20x45° |
| LED Luminous Flux | 3840lm-4080lm | Dimming Options | NON-DIM, PHASE, 1-10V, DALI, DMX512 |
| Chromaticity Tolerance | SDCM≤3 | Driver Options | LYTEMASTER, TRIDONIC, MEANWELL |
| Color Rendering Index | >80/90 | Options On Request | Filters, Diffusers, Honeycomb louvers, Refractor for elliptical distribution. |

PRODUCT SPECIFICATION

| | | | |
|---------------|----------|------------------------|---------------|
| Mains Voltage | DC24V | Environmental Temp | -20°C ~ +50°C |
| Frequency | 50/60 Hz | Rated Service Life (h) | 55,000 |
| Safety Class | II | Certification | CE, RoHS |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.