
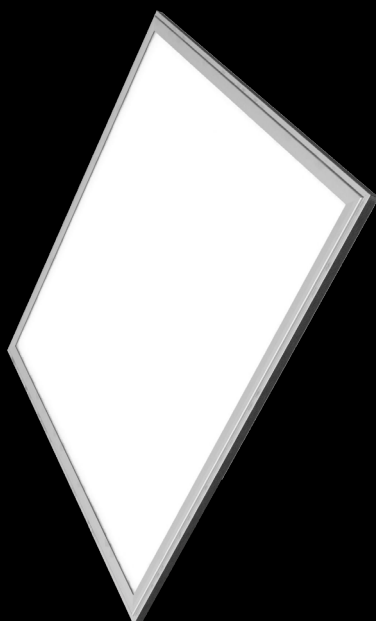


# ACCENT PRO

PANEL & GENERAL LIGHTING



**Model No: LM-001-PLCU\*\*-28W**

## TECHNICAL DESCRIPTION

Ultra Slim LED Panel Light adopts qualified super bright LED as light source, which is stable, long life and no UV & IR emission.


## INSTALLATION

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 5 mm to 12 mm.


## AREAS OF APPLICATION

• Offices • Kitchen • Offices • Factories, • Villas • Supermarkets


## DIAGRAM

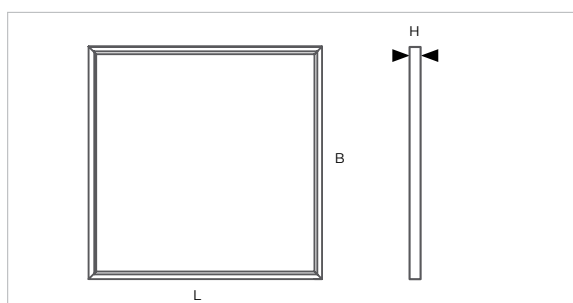

## MODEL NUMBER SELECTION

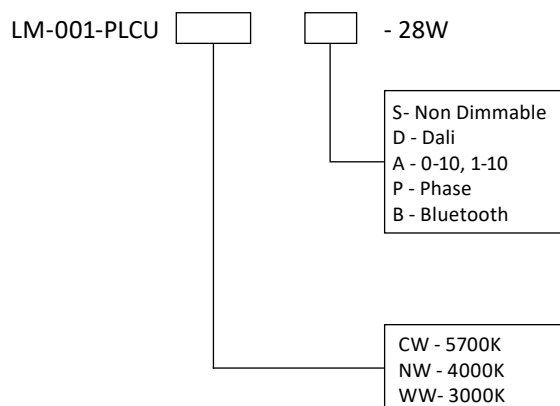

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

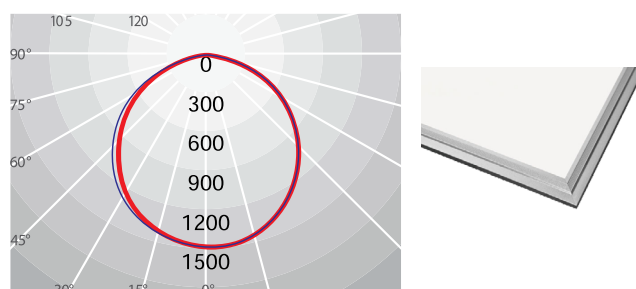

## PHYSICAL CHARACTERISTICS

Installation	Recessed
Driver	Remote
Dimension	L595 x B595 x H10 (mm)
Adjustability	Fixed
Diffuser	PMMA
Rotation	Non Adjustable

IP-Rating	IP40
IK-Rating	IK05
Fixture Material	Extruded Aluminium/Sheet Steel
Standard Finish	White
Optional Accessories	N/A

## ELECTRICAL CHARACTERISTICS

LED Current	900mA
LED Voltage	44V
LED Power	28W
System Power	39.6W
LED Luminous Flux	3200lm
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	>90
Color Temperature	3000K, 4000K, 5700K

Beam Angle	120°
Dimming Options	NON-DIM, PHASE, 1-10V, DALI
Power Factor	0.9
UGR	<22/<19
Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Extended Configuration	5000K
Options On Request	Bluetooth

## PRODUCT SPECIFICATION

Mains Volatge	220-240V
Frequency	50/60 Hz
Safety Class	II

Environmental Temp	-20°C ~ +40°C
Rated Service Life (h)	55,000
Certification	TUV, CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.