


# HALF MOON

BULKHEAD & WALL LIGHT

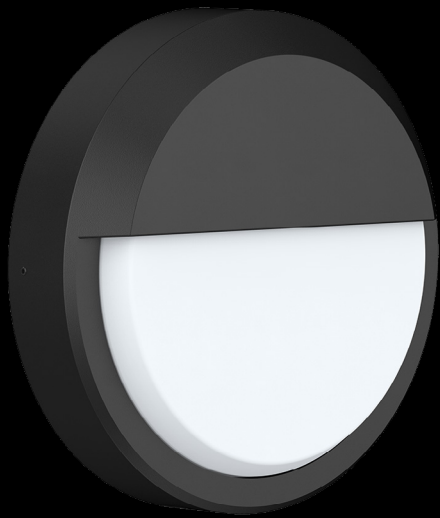

**Model No: LM-011-WL8\*\*-30W**

## TECHNICAL DESCRIPTION

Surface mounted Round Half Moon bulkhead with die-cast black/silver grey aluminium body and opal polycarbonate diffuser. IP65, IK10 double wall design that will conceal cable from view. Round large/small.


## INSTALLATION

Suitable for wall or ceiling mounting with central BESA provision and four fixing points, horizontal holes to aid adjustments. Additional holes for security or uneven surfaces.

## AREAS OF APPLICATION

• Boundary Walls • Accomodations • Villas • Outdoor

## DIAGRAM

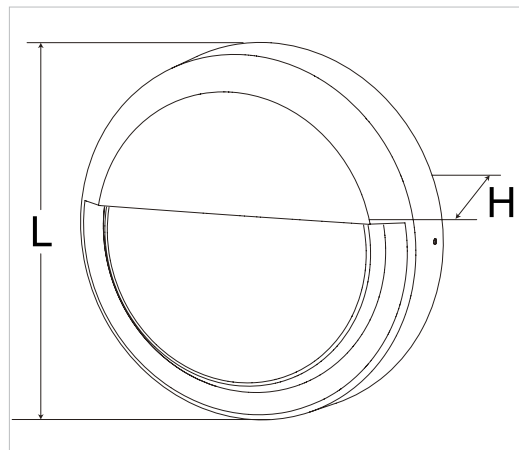


## MODEL NUMBER SELECTION

LM-011-WL8   -30W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10  
P - Phase

CW - 6000K  
NW - 4000K  
WW- 3000K

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



## PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP65
Driver	Integrated	IK-Rating	IK10
Dimension	L320 x H85 mm)	Fixture Material	Die Cast Aluminium
Adjustability	Fixed	Standard Finish	White, Black, Grey
Diffuser	Polycarbonate	Optional Accessories	N/A
Rotation	Non Adjustable		

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Color Rendering Index	>80
LED Current	700 mA	Color Temperature	3000K, 4000K, 6000K
LED Voltage	42V	Beam Angle	120°
LED Power	30W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
System Power	29.4W	Power Factor	0.9
LED Luminous Flux	1950lm	Driver Options	LYTEMASTER, TRIDONIC, HELVAR
Chromaticity Tolerance	SDCM≤3	Options On Request	N/A

## PRODUCT SPECIFICATION

Mains Volatge	230-240V	Environmental Temp	-20°C ~ +40°C
Frequency	50/60 Hz	Rated Service Life (h)	55,000
Safety Class	II	Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.