

# RIPPLE

STRIP & NEON FLEX SERIES



**Model No: LM-011-SR5X\*\*-4.8W**


## TECHNICAL DESCRIPTION

Optimised solder pads make soldering on site even more reliable and faster. The LED chips have been given an extensive upgrade and guarantee constant luminous flux for a distance of more than five metres.

## AREAS OF APPLICATION

- Cove

## DIAGRAM

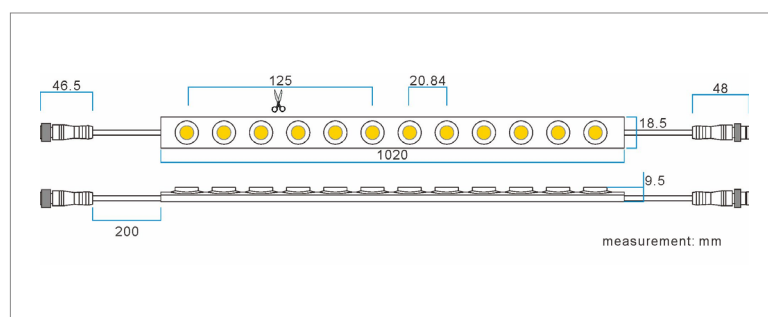

## MODEL NUMBER SELECTION

LM-011-SR5X  - 4.8W

S- Non Dimmable  
D - DALI  
A - 0-10, 1-10

CW - 6000K  
NW - 4000K  
WW - 3000K

## PHYSICAL CHARACTERISTICS

Installation	Cove
Driver	Remote
Dimension	W10 x H4 x L5000 (mm)
Adjustability	N/A
Rotation	Non Adjustable

IP-Rating	IP67
IK-Rating	N/A
Fixture Material	PCB + Silicon
Standard Finish	Transparent
Optional Accessories	N/A

## ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux
LED Power	4.8W/Meter
LED Luminous Flux	480lm/Meter
Chromaticity Tolerance	SDCM≤3
Color Rendering Index	>90
Color Temperature	3000K, 4000K, 6000K

Beam Angle	120°
Dimming Options	NON-DIM, 1-10V, DALI
Power Factor	0.9
Driver Options	LYTEMASTER, TRIDONIC, HELVAR

## PRODUCT SPECIFICATION

Mains Volatge	DC 24V
Safety Class	III
Environmental Temp	-20°C ~ +40°C

Rated Service Life (h)	55,000
Certification	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.